
Digital I/O

Daughter Board

User's Manual

Warranty

All products manufactured by ICP DAS are warranted against defective materials for a period of one year from the date of delivery to the original purchaser.

Warning

ICP DAS assume no liability for damages consequent to the use of this product. ICP DAS reserves the right to change this manual at any time without notice. The information furnished by ICP DAS is believed to be accurate and reliable. However, no responsibility is assumed by ICP DAS for its use, nor for any infringements of patents or other rights of third parties resulting from its use.

Copyright

Copyright 1999 by ICP DAS. All rights are reserved.

Trademark

The names used for identification only may be registered trademarks of their respective companies.

Contents

1. DIO Daughter Board	4
1.1. How to select daughter board.....	4
1.2. Selection Table	5
2. DB-16R 16 Relay Output Board.....	8
2.1. Features	8
2.2. Specifications	9
2.3. Layout.....	10
2.4. Jumper Setting.....	10
2.5. Pin Assignment	11
3. DB-16P 16 Opto-Isolated Digital Input Terminal Board	12
3.1. Features	12
3.2. Specifications	13
3.3. Applications	13
3.4. Layout.....	14
3.5. Jumper Setting.....	14
3.6. Isolated Input.....	15
3.7. Pin Assignment	16
4. DB-16P8R.....	17
4.1. Specification.....	17
4.2. Board Layout.....	18
4.3. External Power & Relay Output.....	19
4.4. Digital Input Configuration	20
4.5. LEDs & Jumper Mapping.....	21
4.6. Pin Assignment of CON5 & 6.....	22
5. DB-24R / DB-24RD	22
5.1. Features	22
5.2. Specification	23

5.3. Layout.....	24
5.4. Pin Assignment	25
6. DB-24PR / DB-24PRD	28
6.1. Features	28
6.2. Specifications	29
6.3. Applications	30
6.4. Layout.....	30
6.5. Pin Assessment.....	31
7. DB-24C 24-Channel Open-Collector Output Board	33
7.1. Features	33
7.2. Applications	34
7.3. Specification.....	34
7.4. Layout.....	35
7.5. Block Diagram	36
8. DB-24OD 24-Channel Open Drain Output Board.....	37
8.1. Features	37
8.2. Specification	37
8.3. Application	38
8.4. Layout.....	38
8.5. Pin Assignment	39
8.6. Block Diagram	39
9. DB-24POR 24-Channel Photo Output Board.....	40
9.1. Features	40
9.2. Applications	41
9.3. Specification	41
9.4. Layout.....	42
9.5. Block diagram.....	43
9.6. Wiring Diagram.....	43
9.7. Pin Assignment	43

10. DB-24SSR/DB-24SSRDC 24-Channel Solid State Relay Board	45
10.1. Features	46
10.2. Applications	46
10.3. Specification	46
10.4. Layout.....	47
10.5. Block Diagram	48
10.6. Wiring Diagram.....	50
10.7. Pin Assignment	51
11. DB-24P 24 Photo-Isolated Digital Input Terminal Board	52
11.1. Features	51
11.2. Applications	51
11.3. Specification	52
11.4. Layout.....	53
11.5. Jumper setting	54
11.6. Isolated Input.....	55
12. Configuration	58
12.1. Connect to DIO Board	58
12.2. DIN-Rail Mounting	62

1. DIO Daughter Board

We provide all kind magnetic relay, SSR, open-collector, photo-mos relay and isolated digital input, daughter boards for I/O control applications.

1.1. How to select daughter board

You must make sure which digital I/O board you choose and what kind applications you designed. Then select suitable daughter board.

■ Selection criteria for output type daughter board

1. Type of contact load
AC or DC? ; Resistive or inductive or capacitate or lamp? ; Occurrence of back electromotive force or inrush current?
2. Level of contact load.
Power load or small signal?
3. Coil rated voltage
12 V_{DC} or 24 V_{DC}?
4. Frequency in switching operation
5. Demand for life in switching operation
6. Connector type of digital I/O board
20-pin or 50-pin Flat cable or D-sub cable?
7. Mounting
Panel mounting or DIN-rail mounting

■ Selection criteria for input type daughter board

1. Type of input signal
AC or DC? Dry contact or wet contact?
2. Level of input signal
3. Connector type of digital I/O board
20-pin or 50-pin Flat connector or D-sub connector?
4. Mounting
Panel mounting or DIN-rail mounting

1.2. Selection Table

Output Type Daughter Board

Spec.	DB-16R	DB-24R	DB-24RD
Type	Magnetic Relay	Magnetic Relay	Magnetic Relay
Contact Arrangement (Each channel)	1 C (1 Form C)	1 C (1 Form C)	1 C (1Form C)
Channel number	16	24	24
Contact rating	0.5 A/120 V _{AC} 1 A/30 V _{DC}	0.5 A/120 V _{AC} 1 A/30 V _{DC}	0.5 A/120 V _{AC} 1 A/30 V _{DC}
Expected Life (Rated Load)	200,000 t	200,000 t	200,000 t
Coil rate voltage	12 V (*1)	12 V: DB-24R/12 24 V: DB-24R/24	12 V: DB-24RD/12 24 V: DB-24RD/24
Connector	20-pin header	50-pin header	50-pin header & 37-pin D-sub connector
DIN-Rail Mounting	No	DB-24R/12/DIN DB-24R/24/DIN	DB-24RD/12/DIN DB-24RD/24/DIN
Page Catalog Vol 4	P79	P80	P80

Spec.	DB-24PR	DB-24PRD	DB-24C
Type	Magnetic Relay	Magnetic Relay	Open-collector
Contact Arrangement (Each channel)	1 C (1 Form C) x 8 1 A (1 Form A) x 16	1 C (1 Form C) x 8 1 A (1 Form A) x 16	NPN
Channel number	24	24	24
Contact rating	5 A/250 V _{AC} 5 A/30 V _{DC}	5 A/250 V _{AC} 5 A/30 V _{DC}	(100 mA/30 V _{DC})x16 (600 mA/30 V _{DC})x8
Expected Life (Rated Load)	200,000 t	200,000 t	Very Long life Maintenance free
Coil rate voltage	12 V: DB-24PR/12 24 V: DB-24PR/24	12 V: DB-24PRD/12 24 V: DB-24PRD/24	External Power Supply: 30 V _{DC} max.
Connector	20-pin header 50-pin header	50-pin header & 37-pin D-sub connector	20-pin header & 50-pin header & 37-pin D-sub connector
DIN-Rail Mounting	DB-24PR/12/DIN DB-24PR/24/DIN	DB-24PRD/12/DIN DB-24PRD/24/DIN	DB-24C/DIN DB-24C/D/DIN
Page Catalog Vol 4	P81	P81	P85

Spec.	DB-24OD	DB-24SSR(DC)	DB-24POR
Type	Open-darin	Solid-state Relay	PhotoMos Relay
Contact Arrangement (Each channel)	N-MOS	1 A (1 Form A)	1 A (1 Form A)
Channel number	24	24	24
Contact rating	250 mA	4 A / 50-250 V _{AC}	
Expected Life (Rated Load)	Very Long life Maintenance free	200,000 t	200,000 t
Coil rate voltage	External Power Supply: 30 V _{DC} max.	12 V: DB-24PRD/12 24 V: DB-24PRD/24	12 V: DB-24PRD/12 24 V: DB-24PRD/24
Connector	20-pin header & 50-pin header & 37-pin D-sub connector	20-pin header 50-pin header	50-pin header & 37-pin D-sub connector
DIN-Rail Mounting	DB-24C/DIN DB-24C/D/DIN	DB-24SSR/DIN DB-24SSR/D/DIN DB-24SSR/D/P/DIN	DB-24POR/DIN DB-24POR/D/DIN
Page Catalog Vol. 4		P86	P83

Spec.	DB-16P8R (*)
Type	Magnetic Relay
Contact Arrangement (Each channel)	1 C (1 Form C)
Channel number	8
Contact rating	3 A/250 V _{AC} 3 A/30 V _{DC}
Expected Life (Rated Load)	30,000 t
Coil rate voltage	24 V only
Connector	20-pin header & 50-pin header & 37-pin D-sub connector
DIN-Rail Mounting	DB-16P8R/DIN DB-16P8R/D/DIN
Page Catalog Vol. 4	P84

Input Type Daughter Board

Spec.	DB-16P	DB-24P	DB-24PD
Type	Optically Isolated	Optically Isolated	Optically Isolated
Channels	16	24	24
Input Range	5~24 V _{DC} /V _{AC}	5~24 V _{DC} /V _{AC}	5~24 V _{DC} /V _{AC}
Input Impedance	1.2 kΩ	1.2 kΩ	1.2 kΩ
connector	20-pin header	50-pin header	50-pin header 37-pin D-sub connector
DIN-Rail Mounting	No	DB-24P/DIN	DB-24PD/DIN
Page Catalog Vol.4	P78	P82	P82

Spec.	DB-16P8R
Type	Optically isolated or dry contact
Channels	16
Input Range	5~30 V _{DC} or Dry contact
Input Impedance	1.2 kΩ
connector	50-pin header, 37-Pin D-sub connector
DIN-Rail Mounting	DB-16P8R/DIN or DB-16P8R/D/DIN
Page Catalog Vol.4	P84

(*) DB-16P8R :

16-channel isolated digital input and 8-channel relay output daughter board

2. DB-16R 16 Relay Output Board

The DB-16R, 16-channel Relay Output Board, consists of 16 form c relays for efficient switch of load by programmed control. It is connector and functionally compatible with 785 series board but with industrial type terminal block. The DB-16R can be connected to DIO-64, A-626, A82x DAS board and PCI-series multi-function board or any other compatible DAS board. The relay are energized by apply 5 volt signal to the appropriate relay channel on the 20-pin flat cable connector. 16 enunciator LEDs, one for each relay, light when their associated relay is activated. To avoid overloading your PC's power supply, this board provides a screw terminal for external power supply.

2.1. Features


16-channel relay output board

- 16 Form C Relays
- Accept 20-pin connector to control 16 form c relays, for use with A-82X, A-62X, DIO-64, PCI-1800, PCI-1200, PCI-1002 series digital output port or any compatible digital output port.
- LED status indicator
- Screw terminals for field wiring.

2.2. Specifications


- Type : form c
- Nominal load :.....0.5 A/120 V_{AC} , 1 A /24 V_{DC}
- Max. Switching Power :60 VA,24 W
- Max. Switching Voltage :120 V_{AC} , 60 V_{DC}
- Max. Switching Current :1 A
- Life Expectancy :Electrical (20 Millions Times)
- Time Value : Operate6 ms
- Release3 ms
- Control Logic :Input TTL high (+5 V) , relay on
- Power consumption :12 V /0.53 A ; 5 V /0.2 A
- Dimensions(L x W):8 inch (205 mm) x 4.5 inch (114 mm)
- Operating Temperature :..... 0 ~ 60°C
- Storage Temperature :-20 ~ 70°C
- Humidity :5% ~ 90% RH, Non condensing

2.3. Layout

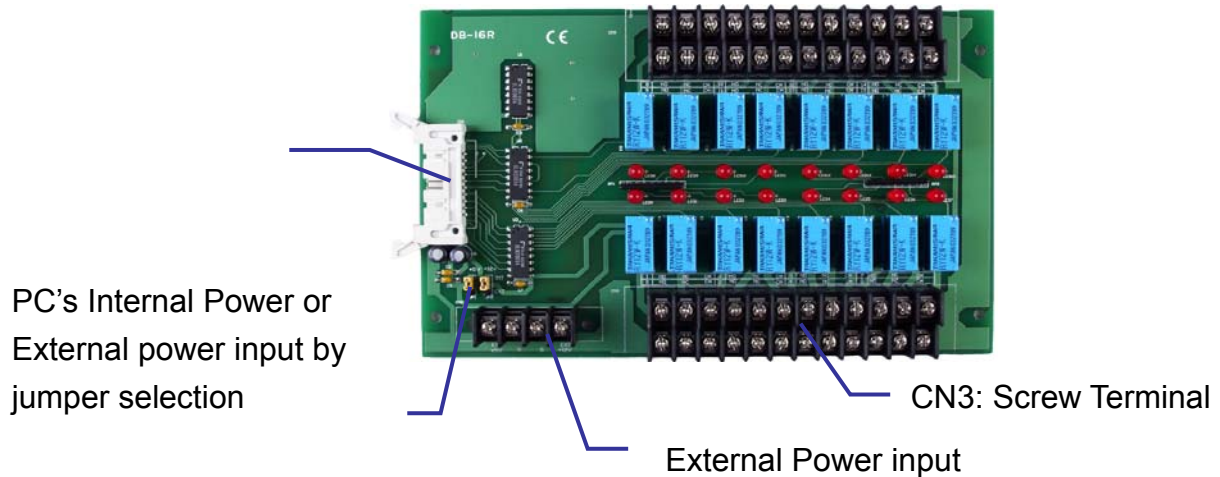

2.4. Jumper Setting

DB-16R PC's internal power or external power input by jumper selection.

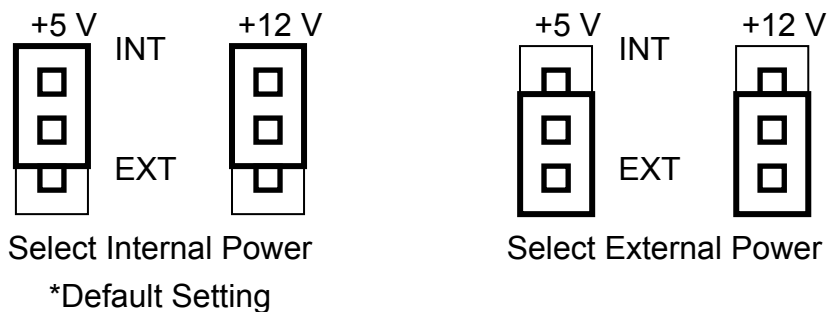

Note: INT: Internal Power Source
EXT: External Power Source

Don't install too much DB-16R in one PC if the jumper is set in the internal power. Some PC's power supply is small and used to power PC only. The power supply will be damaged, if install too much DB-16R and using internal power. You should calculate the power consumption of DB-16R and to make sure which setting is better.

2.5. Pin Assignment

The CN1 is 20-pin header linked to TTL digital I/O board via 20-pin flat cable.
The CN2 is an external power input connector for external power input wiring.
The CN3 and CN4 are relay contact screw terminal blocks.

DB-16R -CN1 : 20 Pin connector

DO0	1	2	DO1
DO2	3	4	DO3
DO4	5	6	DO5
DO6	7	8	DO7
DO8	9	10	DO9
DO10	11	12	DO11
DO12	13	14	DO13
DO14	15	16	DO15
D.GND	17	18	D.GND
+5V	19	20	+12V

CN2: External Power Input Connector

+5 V	GND	GND	+12 V
------	-----	-----	-------

Note : Don't wiring to external power input connector if the power selection jumper setting in < INT > position.

CN3 Relay contact terminal block

8	NO	NC	CM	10	NO	NC	CM	12	NO	NC	CM	14	NO	NC	CM
9	NO	NC	CM	11	NO	NC	CM	13	NO	NC	CM	15	NO	NC	CM

CN4 Relay contact terminal block

1	NO	NC	CM	3	NO	NC	CM	5	NO	NC	CM	7	NO	NC	CM
0	NO	NC	CM	2	NO	NC	CM	4	NO	NC	CM	6	NO	NC	CM

3. DB-16P 16 Opto-Isolated Digital

Input Terminal Board

The DB-16P is a 16 channel isolated digital input daughter board for A-82x DAS board or any 812PG, 711 series DAS boards. The optically isolated inputs of the DB-16P consist of a bi-directional LED with a resistor for current sensing. You can use the DB-16P to sense DC signal from TTL levels up to 24 V. You can also use DB-16P to sense a wide range of AC signals. The DB-16P registers a constant logic high if the frequency of the input AC signal is greater or equal to 1 kHz, and the voltage of the AC signal is at least 4 V_{rms}. If you are using AC input signal, you should short the AC filter Jumper. You can use the board to isolate the computer from large common-mode voltages, ground loops, and voltage spikes that often occur in industrial environments.

3.1. Features

- 16 optically isolated digital input
- Connected to DIO-64, A-62X, A-82x data acquisition boards
- AC/DC Signal Input
- AC Signal Input with filter
- Input buffer with voltage comparators
- 3,000 V isolation
- Each channel has it's LED indicator

3.2. Specifications

- I/O connector Electrical Specifications
 - Configuration: optically isolated digital input channels
 - Compatibility: TTL compatible
- * Digital Input
 - Number of channels: 16 Channels,
each channel with its own ground
reference isolated from other channels
 - Maximum input voltage: $24 V_{DC}$ or $24 V_{AC}$

Digital Logic Level:

Level	Minimum	Maximum
Input low voltage (DC or peak AC)	0	+/-1 V
Input high voltage DC 1 kHz AC	+/- $3.8 V_{DC}$ $4 V_{rms}$	+/- $24 V_{DC}$ $24 V_{AC}$

Input impedance: $1.2 k\Omega$

Input Current

5 V inputs : 4 mA /channel

24 V inputs : 20 mA /channel


Input Response Time : $20 \mu s$ without filter / 2.2 ms with filter

- Power consumption : 224 mA/ +5 V (Max) from PC
- Board Dimension (L x W) : 8.06 " (205 mm) x 4.5 "(114 mm)
- Operating Environment
- Component temperature : $0 \sim 50^{\circ}C$
- Relativity humidity : 5% ~ 90% RH, non condensing
- Storage Environment
 - Temperature: $0 \sim 60^{\circ}C$
 - Relative humidity: 5% ~ 90 % RH, non condensing


3.3. Applications

- Isolated digital input sensing
- Process monitoring


3.4. Layout

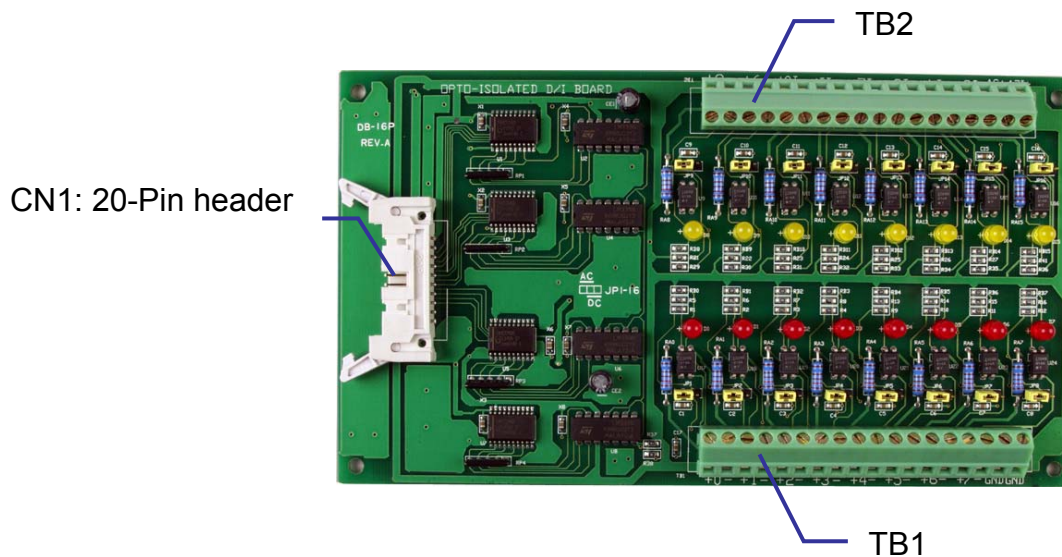

3.5. Jumper setting




For AC signal with filter




For DC signal without filter

If you are using AC signal, you must short the AC FILTER jumper.
 If you are using DC input signals, the AC FILTER is optional. If the response time of input signals less than 20 μ s, set the filter off. If you want a slow response (about 5 ~ 10 ms) for rejecting noise or contact bouncing, short the AC FILTER jumper.

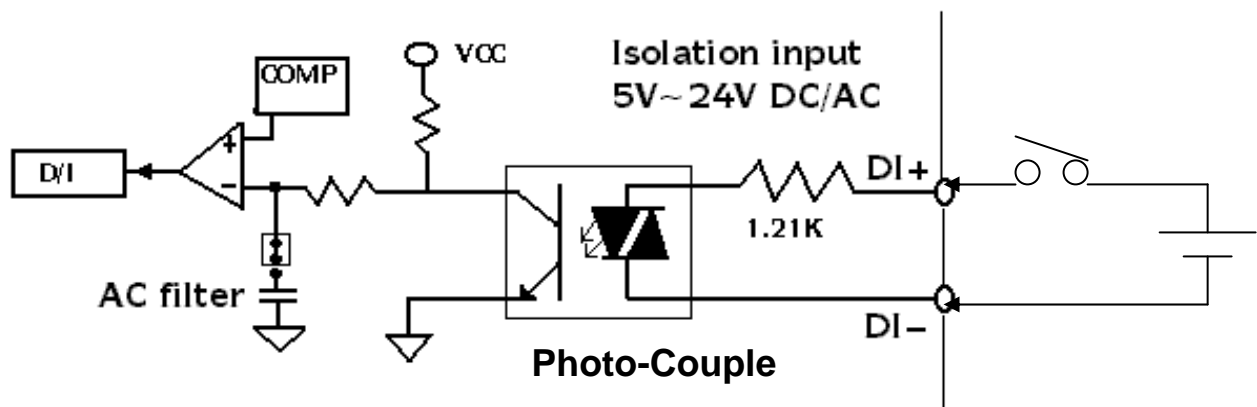

3.6. Isolated Input

The normal input voltage range is 5 ~ 24 V_{AC} or V_{DC}. The normal input range can be changed by choosing suitable resistor to limit the current through the Photo-isolator to about 10 mA(I_f). The default resistor is 1.2 kΩ/1 W.

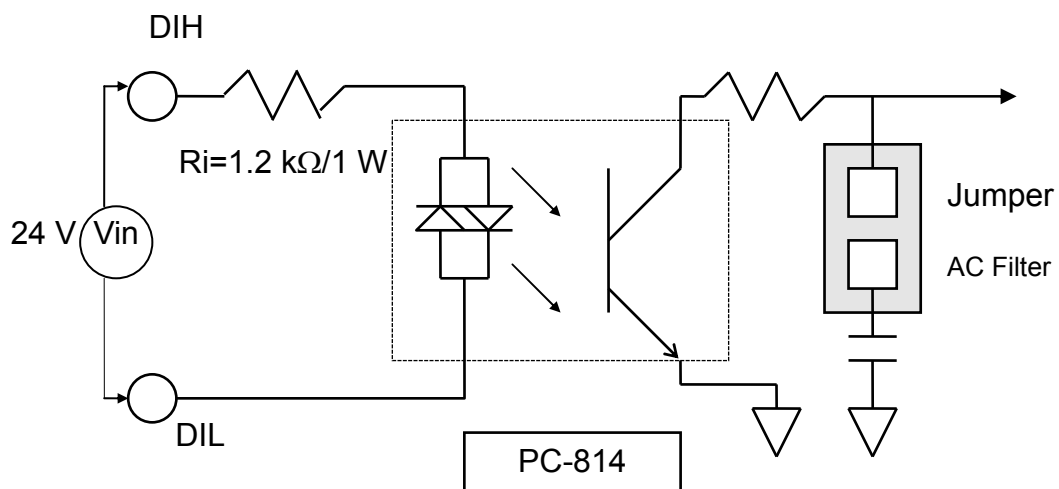

$$R_i = V_{in} / I_f$$

$$P_w = V_{in} \times I_f$$

Calculation Example:

$$\text{If } V_{in} = 120 \text{ V then } R_i = 120(\text{V}) / 0.01(\text{A}) = 12 \text{ k}\Omega$$

$$P_w = 120(\text{V}) \times 0.01(\text{A}) = 1.2 \text{ W}$$

The R_i must be replaced by 12 kΩ/2 W(1.2 W)

3.7. Pin Assignment

- CN1 Pin assignment

DO0	1	2	DO1
DO2	3	4	DO3
DO4	5	6	DO5
DO6	7	8	DO7
DO8	9	10	DO9
DO10	11	12	DO11
DO12	13	14	DO13
DO14	15	16	DO15
D.GND	17	18	D.GND
+5V	19	20	+12V

- TB1 Pin assignment

Pin Number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Label	0H	0L	1H	1L	2H	2L	3H	3L	4H	4L	5H	5L	6H	6L	7H	7L	F.G.	F.G.

- TB2 Pin assignment

Pin Number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Label	8H	8L	9H	9L	10H	10L	11H	11L	12H	12L	13H	13L	14H	14L	15H	15L	+5V	+12V

4. DB-16P8R

The DB-16P8R is a 16-channel isolated/non-isolated input & 8-channel relay output board. The isolated digital input can be used to sense 3.5 V_{DC} ~ 24 V_{DC} signal. The non-isolated digital inputs are used to sense dry contact. The relay output consists of 16 form C power relays. The user can use this board to isolate the computer from large common-mode voltage, ground loops and transient voltage spike that often occur in industrial environments.

4.1. Specification

- Isolated Digital Input
 - Isolation voltage: 3750 V
 - Input voltage: 3.5 V ~ 24 V
 - Response time: 10 kHz Max.
- Dry Contact Input (non-isolated input)
 - Logic high: input close
 - Logic low: input open
- Power Relay
 - Type 1 form C (SPDT)
 - Rating:



Nominal Load	250 V _{AC} /5 A
MAX. Switching Power	1,250 VA(NO),750 VA(NC)
MAX. Switching Voltage	250 V _{AC} , 150 V _{DC}
MAX. Switching Current	5 A
 - Life expectancy:

Mechanical	10 millions operations
------------------	------------------------
 - Time Value:


Operate	10 ms
Release	5 ms
- Varistor for power reply
 - Power consumption:

Min	2.5 μA (All relays off)
Max	0.5 A (All relays on)
Relay On	22 mA (for single relay)
- Operating Temperature: 0 ~ 60 °C
- Storage Temperature: -20 ~ 70 °C
- Humidity: 5% ~ 95% RH, non condensing
- Power consumption: 0.3 A @ 24 V ; 0.1 A @ 5 V
- Dimension (L x W): 213 mm x 132 mm


4.2. Board Layout

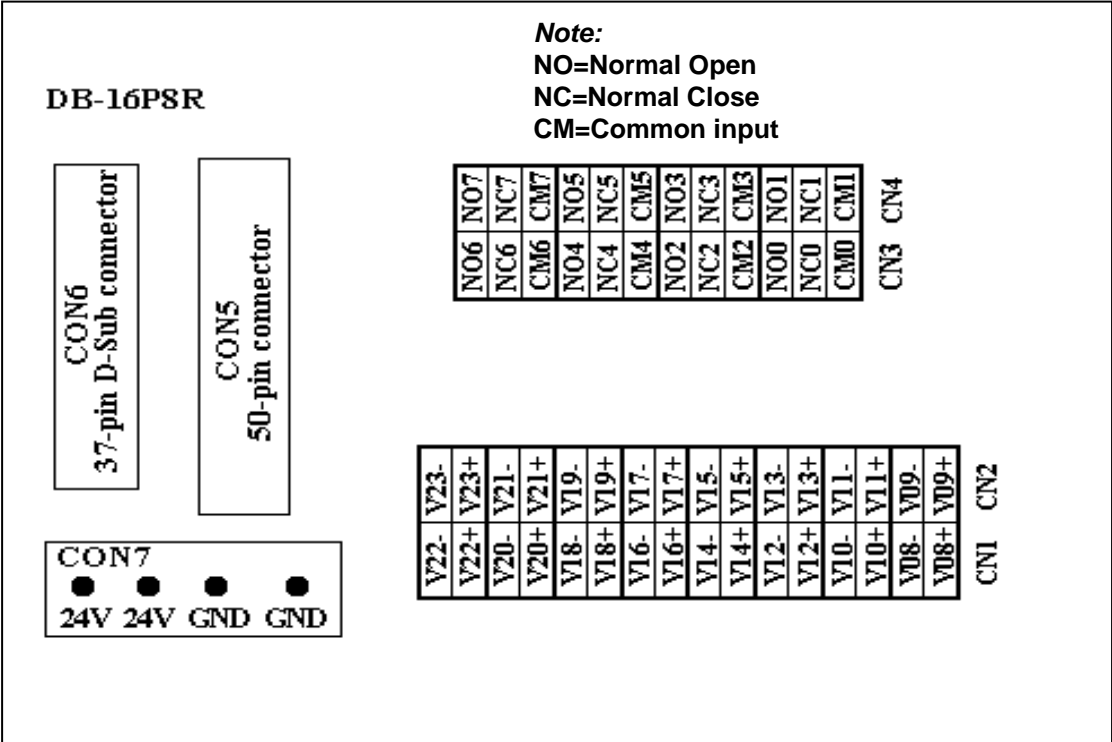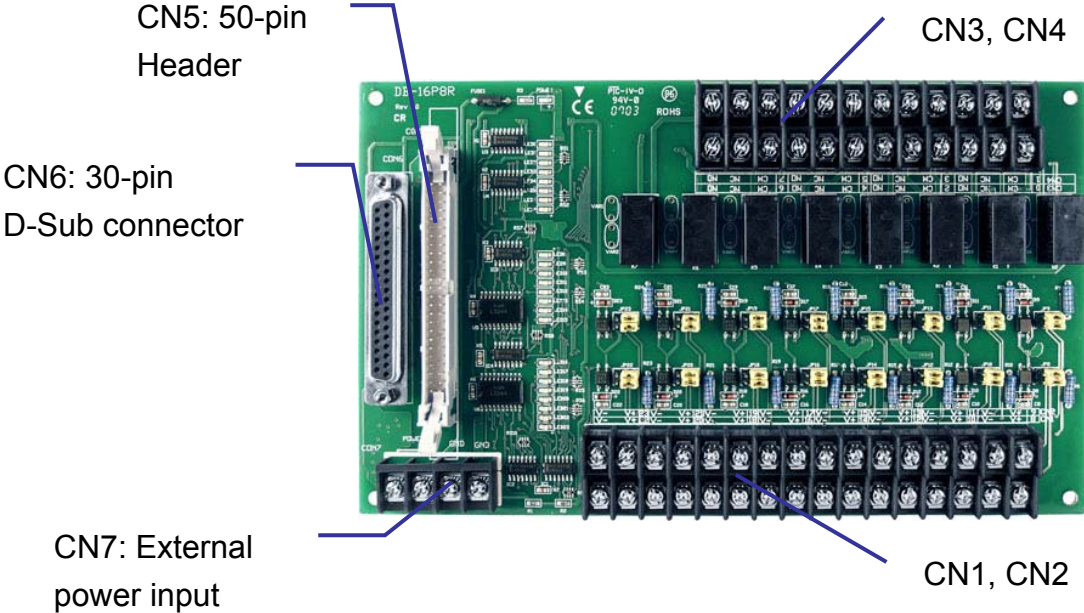

4.3. External Power & Relay Output

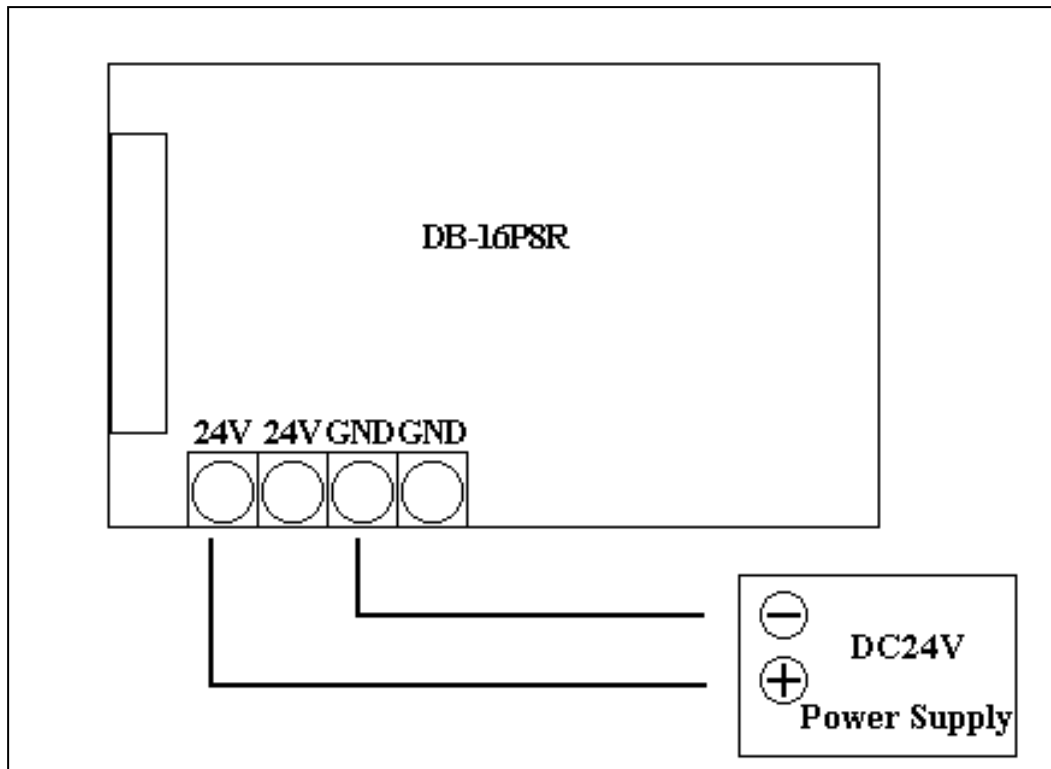


Relay Output

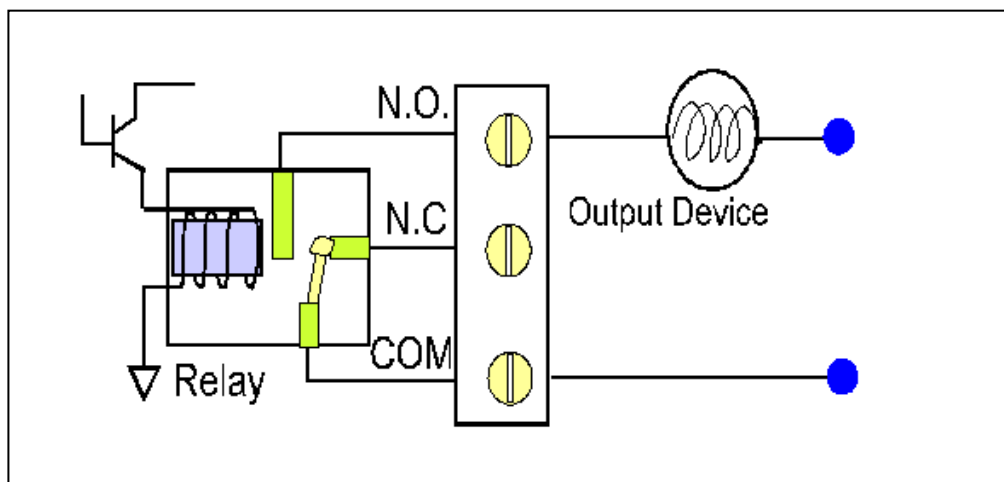


4.4. Digital Input Configuration


JP??




Select Isolated D/I

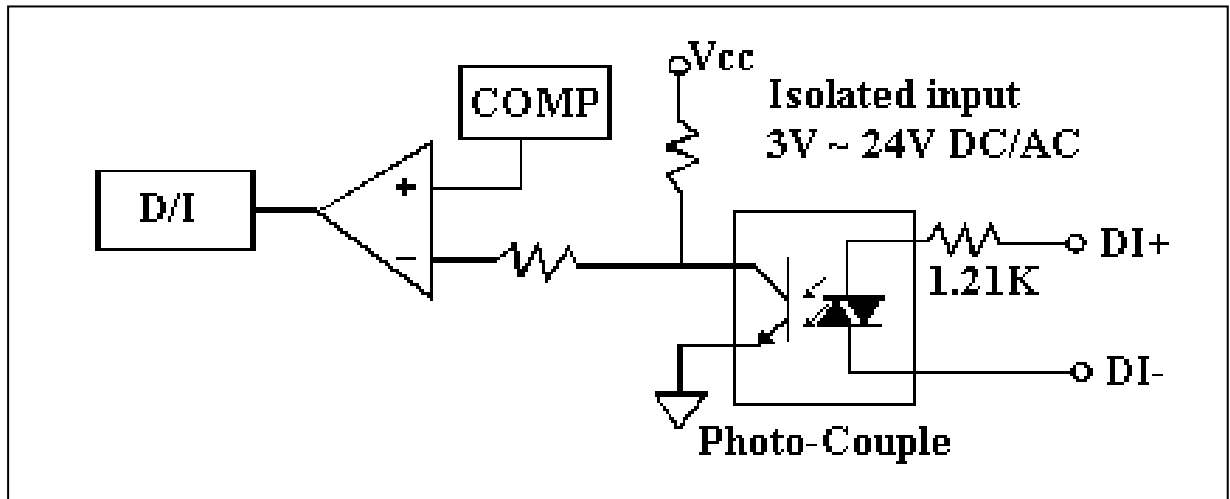

JP??



Select Non-Isolated D/I

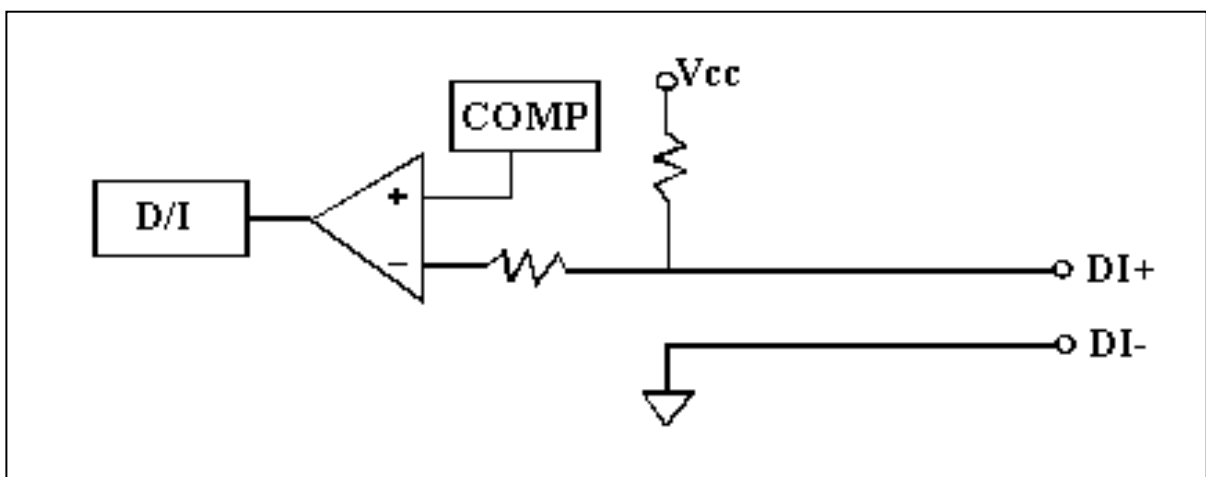

4.5. LEDs & Jumper Mapping

OPTO-22	LEDs	Relays / DIs		CON5(50-pin)	CON6(30-pin)
PA0	LED0	Relay-0		Pin-47	Pin-37
PA1	LED1	Relay-1		Pin-45	Pin-36
PA2	LED2	Relay-2		Pin-43	Pin-35
PA3	LED3	Relay-3		Pin-41	Pin-34
PA4	LED4	Relay-4		Pin-39	Pin-33
PA5	LED5	Relay-5		Pin-37	Pin-32
PA6	LED6	Relay-6		Pin-35	Pin-31
PA7	LED7	Relay-7		Pin-33	Pin-30
PB0	LED8	DI-8	JP8	Pin-31	Pin-10
PB1	LED9	DI-9	JP9	Pin-29	Pin-9
PB2	LED10	DI-10	JP10	Pin-27	Pin-8
PB3	LED11	DI-11	JP11	Pin-25	Pin-7
PB4	LED12	DI-12	JP12	Pin-23	Pin-6
PB5	LED13	DI-13	JP13	Pin-21	Pin-5
PB6	LED14	DI-14	JP14	Pin-19	Pin-4
PB7	LED15	DI-15	JP15	Pin-17	Pin-3
PC0	LED16	DI-16	JP16	Pin-15	Pin-29
PC1	LED17	DI-17	JP17	Pin-13	Pin-28
PC2	LED18	DI-18	JP18	Pin-11	Pin-27
PC3	LED19	DI-19	JP19	Pin-9	Pin-26
PC4	LED20	DI-20	JP20	Pin-7	Pin-25
PC5	LED21	DI-21	JP21	Pin-5	Pin-24
PC6	LED22	DI-22	JP22	Pin-3	Pin-23
PC7	LED23	DI-23	JP23	Pin-1	Pin-22

Note:

1. JP8 to JP23 select isolated / non-isolated digital input. Refer to Sec.1.4 for more information.
2. JP8 select DI-8
3. JP9 select DI-9
4.
5. JP23 select DI-23

4.6. Pin Assignment of CON5 & 6

CON6: 37-pin D-Sub connector

Pin	Name	Pin	Name
1	N.C	20	VCC
2	N.C.	21	GND
3	PB7	22	PC7
4	PB6	23	PC6
5	PB5	24	PC5
6	PB4	25	PC4
7	PB3	26	PC3
8	PB2	27	PC2
9	PB1	28	PC1
10	PB0	29	PC0
11	GND	30	PA7
12	N.C	31	PA6
13	GND	32	PA5
14	N.C.	33	PA4
15	GND	34	PA3
16	N.C.	35	PA2
17	GND	36	PA1
18	VCC	37	PA0
19	GND	XXX	not available

CON5: 50-pin flat-cable connector

Pin	Name	Pin	Name
1	PC7	2	GND
3	PC6	4	GND
5	PC5	6	GND
7	PC4	8	GND
9	PC3	10	GND
11	PC2	12	GND
13	PC1	14	GND
15	PC0	16	GND
17	PB7	18	GND
19	PB6	20	GND
21	PB5	22	GND
23	PB4	24	GND
25	PB3	26	GND
27	PB2	28	GND
29	PB1	30	GND
31	PB0	32	GND
33	PA7	34	GND
35	PA6	36	GND
37	PA5	38	GND
39	PA4	40	GND
41	PA3	42	GND
43	PA2	44	GND
45	PA1	46	GND
47	PA0	48	GND
49	VCC	50	GND

5. DB-24R / DB-24RD

The DB-24R / DB-24RD, 24-channel Relay Output Board, consists of 24 form c relays for efficient switch of load by programmed control. The DB-24R can be connected to DIO-24, DIO-48, DIO-D96, DIO-144, PIO-D144, PIO-D96 and PIO-D48 and any other OPTO-22 compatible Digital I/O board the relays are energized by apply 5 volt signal to the appropriate relay channel on the 50-pin header or 37-pin D-sub connector (DB-24RD). Twenty-four enunciator LEDs, one for each relay, light when their associated relay is activated. This board provides a screw terminal for external power supply.

5.1. Features

■ DB-24R

- 24 Form C Relays.
- Contact rate up to 0.5 A/120 V_{AC} , 1 A/30 V_{DC}
- Accept 50-pin OPTO-22 compatible header, For DIO-24, DIO-48, DIO-144 and PIO-series digital output port or any OPTO-22 compatible digital output port.
- LED indicates relay status.
- Screw terminals for filed wiring.


■ DB-24RD

- Accept 50-pin header and 37-pin D-sub connector
 1. Accept 50-pin OPTO-22 compatible header, For DIO-24, DIO-48, DIO-144 and PIO-series digital output port or any OPTO-22 compatible digital output port.
 2. The 37-pin D-sub connector can be directly connected to PIO-D144, PIO-D96, PIO-D48, PIO-D56 and PIO-D24.
- 24 Form C Relays.
- Contact rate up to 0.5 A/120 V_{AC} , 1 A/30 V_{DC}
- LEDs indicate relay status.
- Screw terminals for filed wiring.

5.2. Specification

- Type : form c
- Nominal load :..... 0.5 A/120 V_{AC} , 1 A /24 V_{DC}
- Max. Switching Power : ... 60 VA,24 W
- Max. Switching Voltage : ... 120 V_{AC} , 60 V_{DC}
- Max. Switching Current : ... 1 A
- Life Expectancy: Electrical (20 Millions Times)
- Time Value : Operate 6 ms
- Release 3 ms
- Control Logic: Input TTL high (+5 V) , relay on
- Power consumption: 0.53 A @ 12 V ; 0.2 A @ 5 V
- Dimensions (L x W) :220 mm x 132 mm
- Operating Temperature :... 0 ~ 60°C
- Storage Temperature : -20 ~ 70°C
- Humidity : 5% ~ 90%RH, non condensing


5.3. Layout

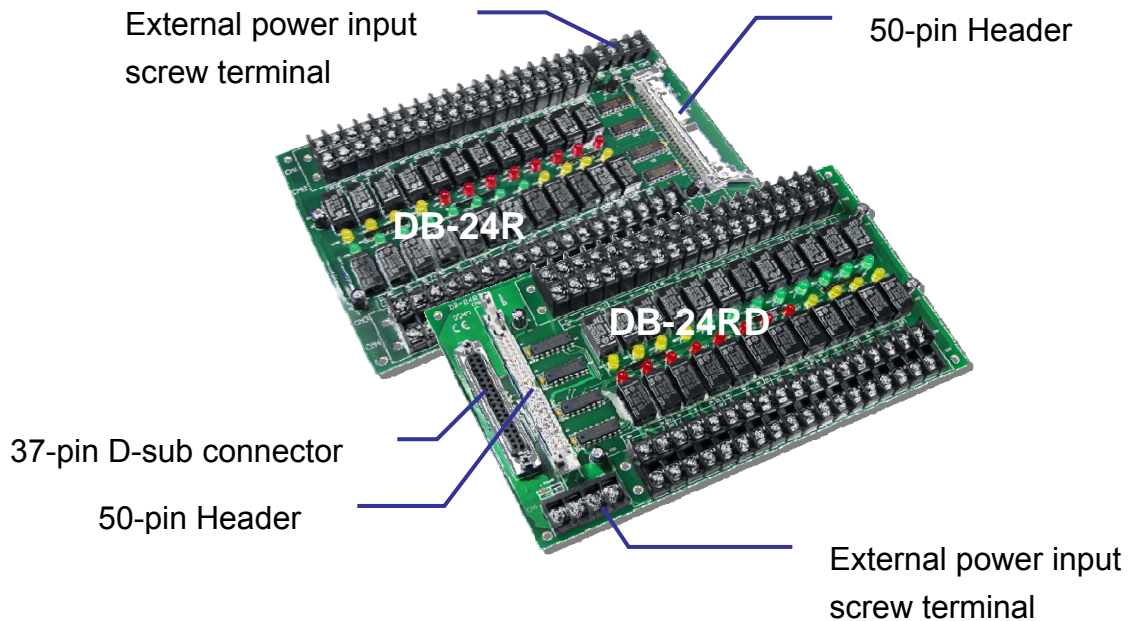

DB-24R and DB-24RD support external power supply only.

DB-24R/12 V, DB-24RD/12 V for DC 12 V external power supply

DB-24R/12 V, DB-24RD/24 V for DC 24 V external power supply

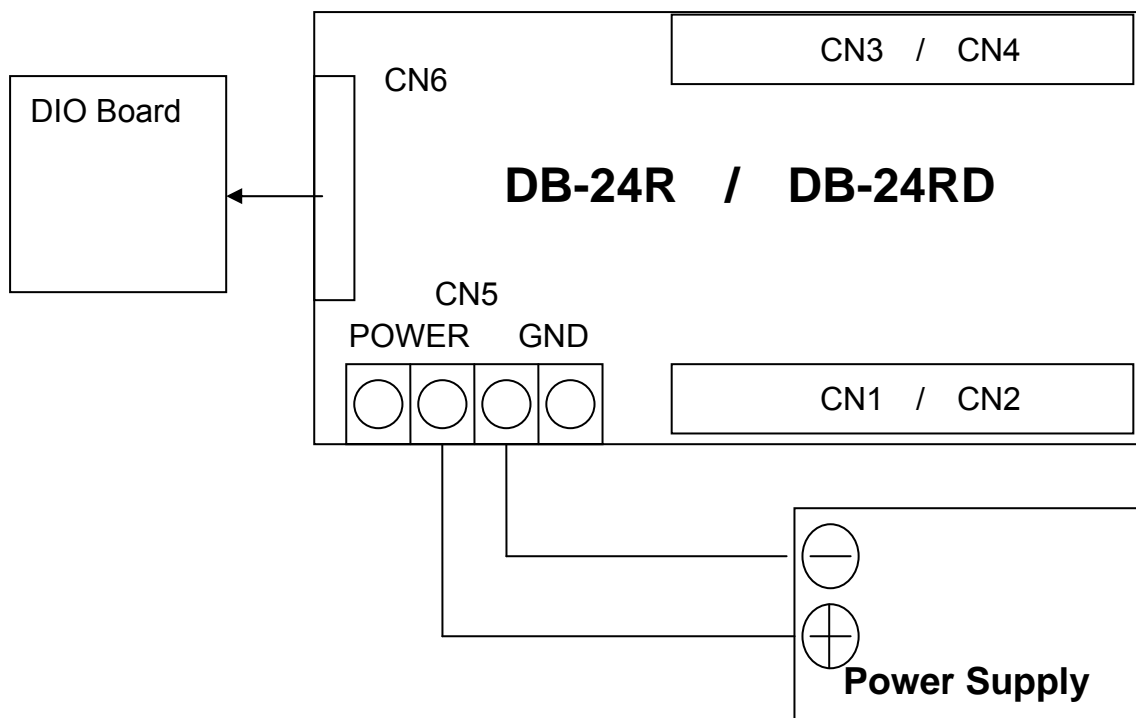


5.4. Pin Assignment


CN6: OPTO-22 50-Pin Header Pin assignment for DB-24R and DB-24RD

GND	50	○	○	49	+5 V input
GND	48	○	○	47	CH0
GND	46	○	○	45	CH1
GND	44	○	○	43	CH2
GND	42	○	○	41	CH3
GND	40	○	○	39	CH4
GND	38	○	○	37	CH5
GND	36	○	○	35	CH6
GND	34	○	○	33	CH7
GND	32	○	○	31	CH8
GND	30	○	○	29	CH9
GND	28	○	○	27	CH10
GND	26	○	○	25	CH11
GND	24	○	○	23	CH12
GND	22	○	○	21	CH13
GND	20	○	○	19	CH14
GND	18	○	○	17	CH15
GND	16	○	○	15	CH16
GND	14	○	○	13	CH17
GND	12	○	○	11	CH18
GND	10	○	○	9	CH19
GND	8	○	○	7	CH20
GND	6	○	○	5	CH21
GND	4	○	○	3	CH22
GND	2	○	○	1	CH23

CN7: 37-pin D-sub connector
Pin-Assignment for DB-24RD only

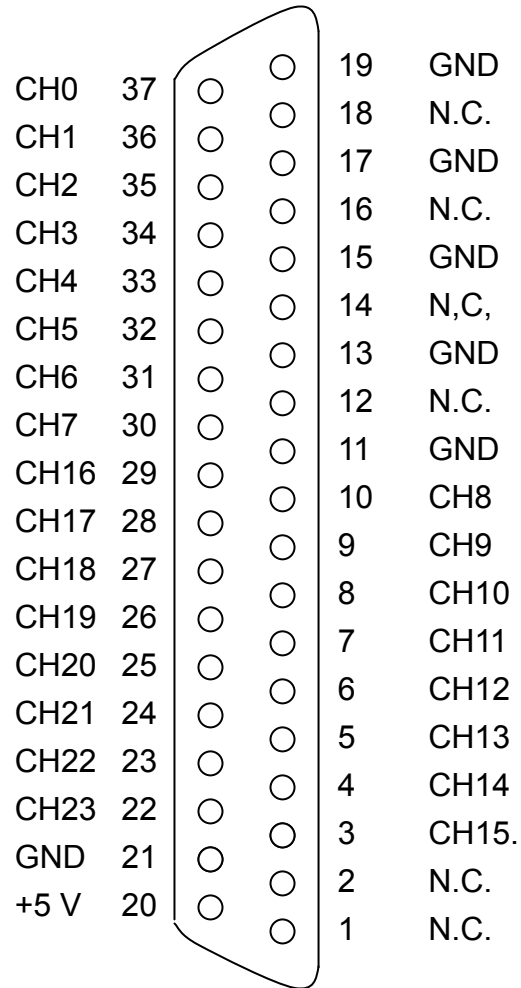

CN5: External Power Connector



**Note: Input DC+12 V power for optional 12 V version
Input DC+24 V power for optional 24 V version**

CN 1 /CN 2 : Screwing terminal

CH 12	CH 14	CH 16	CH 18	CH 20	CH 22
CH 13	CH 15	CH 17	CH 19	CH 21	CH 23


CN 3 / CN 4 : Screwing terminal

CH 0	CH 2	CH 4	CH 6	CH 8	CH 10
CH 1	CH 3	CH 5	CH 7	CH 9	CH 11

Each Channel


CH 0~23		
MC(common)	NC(normal close)	NO(normal open)

Form C Relay

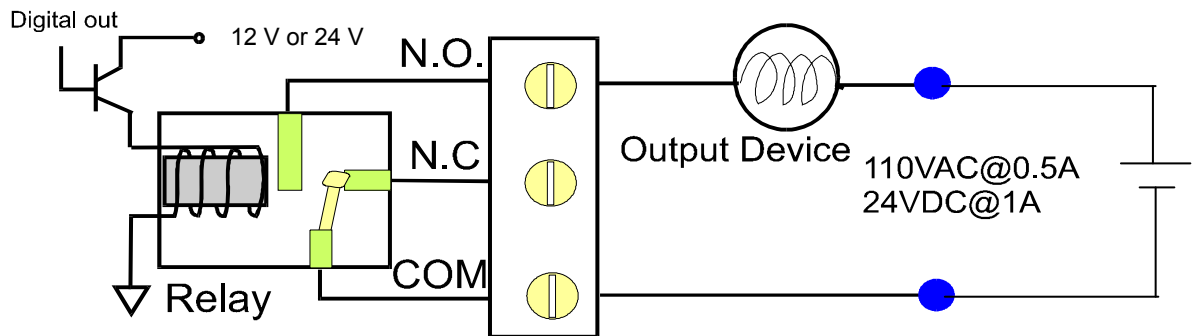


DB-24RD dimensions


Unit: mm

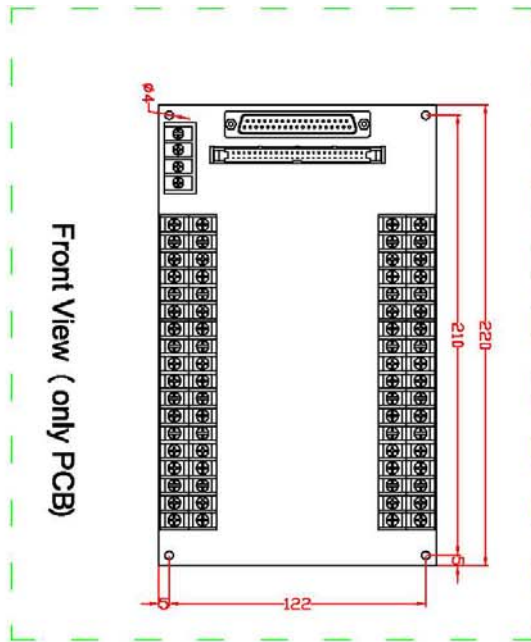


Left Side View



Front View

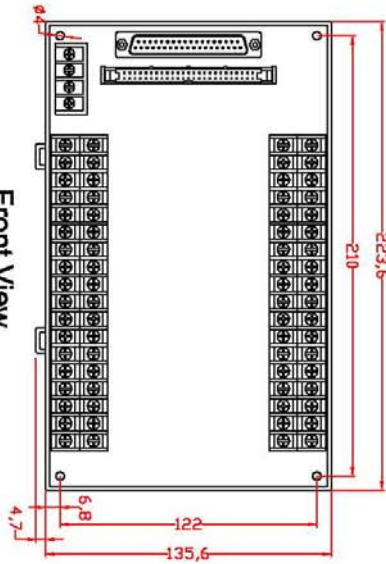


Right Side View



Top View



Bottom View



6. DB-24PR / DB-24PRD

The DB-24PR / DB-24PRD, 24 channel power relay output board, consists of 8 form C & 16 form A electromechanical relays for efficient switching of load by programmed control. The contact of each relay can control a 5 A load at 250 V_{AC}/ 30 V_{DC}. The relay are energized by applying 5 voltage signal to the appropriated relay channel on the 20-pin header (DB-24PR only), 50 pin header and 37-pin D-sub connector (DB-24PRD only). Twenty-four enunciator LEDs, one for each relay, light when their associated relay is activated. To avoid overloading your PC's power supply, this board provides a screw terminal for power supply. CN1, CN2, CN3 and CN4 are terminal blocks to connect with wiring. The CN7 is used to connect with DIO-24, DIO-48, DIO-144 or any OPTO-22 compatible digital output port. The CN6 is used to connect with A-82XPG series PCI-1800 series ISO-DA series, DIO-64 or any compatible digital output port. The DB-24PRD has one 37-pin D-sub connector. The 37-pin D-sub connector can be directly connected to PIO-D144, PIO-D96, PIO-D48 and PIO-D24's 37-pin D-sub connector.

6.1. Features

■ DB-24PR

- 16 form A relays, 8 form C relays.
- DB-24PR accepts two kind connectors:
 - CN6 accepts 20-pin header to control 8 form C (channel 0~7) relays and 8 form A relays (channel 8~15).
 - CN5 accepts 50-pin header to control 8 form C relays and 16 form A relays.
- Each varistor protect one contact.
- LED indicates relay status.

■ DB-24PRD

- DB-24PRD accept two kind connectors:
 - One 37-pin D-sub connector for PIO-D144, PIO-D96, PIO-D48, PIO-D56 and PIO-D24 digital I/O boards
 - One 50-pin header for DIO-144, DIO-96, DIO-48 and DIO-24 digital I/O boards. Other features are the same as DB-24PR.

6.2. Specifications

- Form A relays

Type : 1 form A (SPST-NO)

Rating :

Nominal Load5 A 250 V_{AC} or 30 V_{DC}

Max. Switching Power..... 90 W

Max Switching Voltage.....270 V_{AC}, 150 V_{DC}.

Max. Switching Current.....5 A

Life expectancy:

Mechanical.....20 millions operations

Time Value:

Operate.....10 ms

Release.....5 ms

- Form C Relays

Type : 1 form C (SPDT)

Rating :

Nominal Load 250 V_{AC} / 5 A.

MAX. Switching Power.....1,250 VA(NO) , 750 VA(NC)

MAX. Switching Voltage.....250 V_{AC}, 150 V_{DC}

MAX. Switching Current5 A

Life expectancy:

Mechanical 10 millions operations

Time Value:

Operate.....10 ms

Release.....5 ms

- Varistor:

Power consumption:

Min :2.5 μ A (All relays off)

Max :0.5 A (All relays On)


1 relay On : 22 mA

- Dimensions (L x W): 220 mm x 132 mm

6.3. Applications

- Test Automation
- Laboratory & Factory Automation
- On/Off Control

6.4. Layout

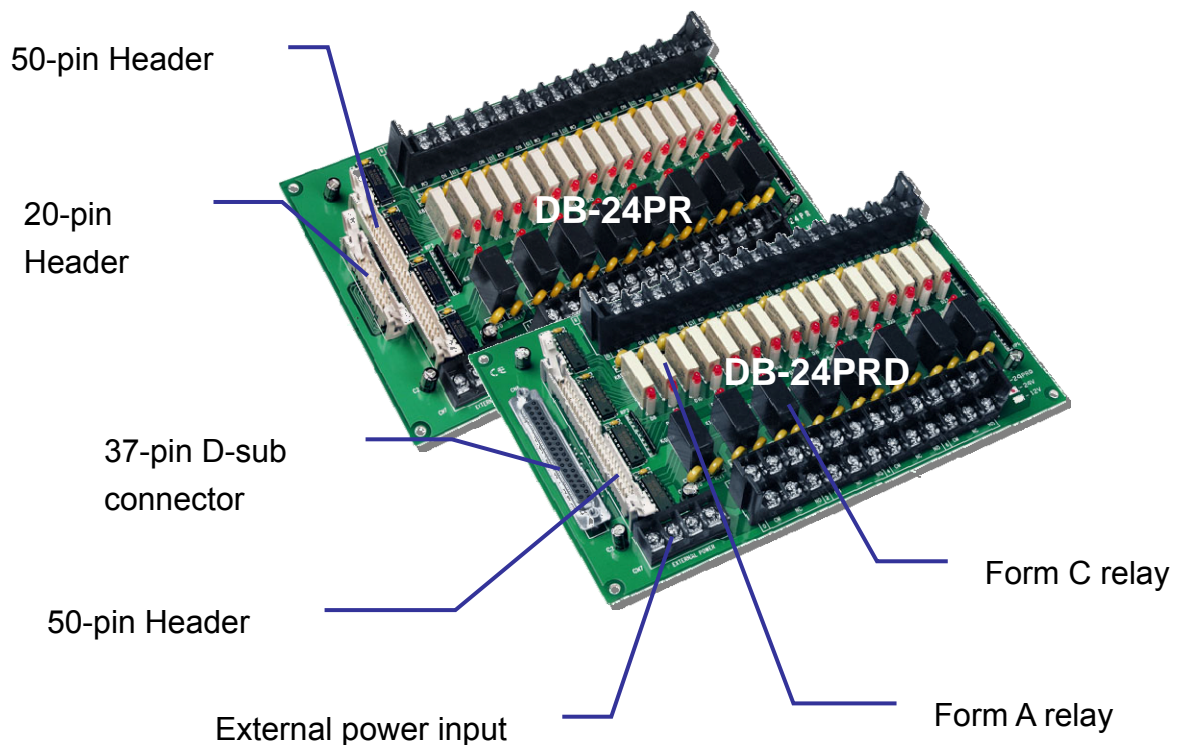

Note :

DB-24PR, DB-24PRD provides external power input only.

The input power has two versions:

External Power +12 V_{DC} input for 12 V Version

External Power +24 V_{DC} input for 24 V version

6.5. Pin Assessment

CN5 : 50-pin header (DB-24PR & DB-24PRD)

GND	50	○	○	49	+5 V input
GND	48	○	○	47	CH0
GND	46	○	○	45	CH1
GND	44	○	○	43	CH2
GND	42	○	○	41	CH3
GND	40	○	○	39	CH4
GND	38	○	○	37	CH5
GND	36	○	○	35	CH6
GND	34	○	○	33	CH7
GND	32	○	○	31	CH8
GND	30	○	○	29	CH9
GND	28	○	○	27	CH10
GND	26	○	○	25	CH11
GND	24	○	○	23	CH12
GND	22	○	○	21	CH13
GND	20	○	○	19	CH14
GND	18	○	○	17	CH15
GND	16	○	○	15	CH16
GND	14	○	○	13	CH17
GND	12	○	○	11	CH18
GND	10	○	○	9	CH19
GND	8	○	○	7	CH20
GND	6	○	○	5	CH21
GND	4	○	○	3	CH22
GND	2	○	○	1	CH23

CN6: 20-pin header (DB-24PR only)

DO0	1	2	DO1
DO2	3	4	DO3
DO4	5	6	DO5
DO6	7	8	DO7
DO8	9	10	DO9
DO10	11	12	DO11
DO12	13	14	DO13
DO14	15	16	DO15
D.GND	17	18	D.GND
+5V	19	20	+12V

CN6: 37-pin D-sub connector (DB-24PRD only)

CH0	37	○	○	19	GND
CH1	36	○	○	18	N.C.
CH2	35	○	○	17	GND
CH3	34	○	○	16	N.C.
CH4	33	○	○	15	GND
CH5	32	○	○	14	N,C,
CH6	31	○	○	13	GND
CH7	30	○	○	12	N.C.
CH16	29	○	○	11	GND
CH17	28	○	○	10	CH08
CH18	27	○	○	9	CH9
CH19	26	○	○	8	CH10
CH20	25	○	○	7	CH11
CH21	24	○	○	6	CH12
CH22	23	○	○	5	CH13
CH23	22	○	○	4	CH14
GND	21	○	○	3	CH15.
+5 V	20	○	○	2	N.C.
		○	○	1	N.C.

CN1 : Screw terminal

CH0			CH2			CH4			CH6		
CM	NC	NO	CM	NC	NO	CM	NC	NO	CM	NC	NO

CN2 : Screw terminal

CH1			CH3			CH5			CH7		
CM	NC	NO	CM	NC	NO	CM	NC	NO	CM	NC	NO

CN3 : Screw terminal

CH23	CH21	CH19	CH17	CH15	CH13	CH11	CH9
NO	CM	NO	CM	NO	CM	NO	CM


CN4 : Screw terminal

CH22	CH20	CH18	CH16	CH14	CH12	CH10	CH8
NO	CM	NO	CM	NO	CM	NO	CM

Note :


FOR Channel 0 ~ 7 Form C Relay screw terminals

CM : Common
 NC : Normal Close
 NO : Normal Open

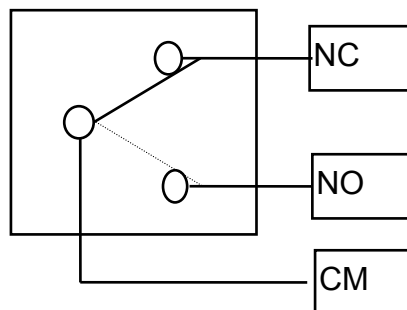

For Channel 8 ~24 Form A Relay screw terminal

CM : Common
 NO : Normal Open

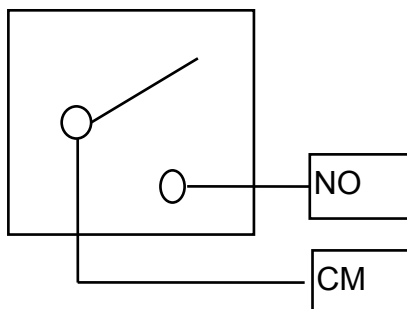

7. DB-24C

24-Channel Open-Collector Output Board

The DB-24C has 24 channels of optically isolated digital outputs, arranged into four isolated banks. Each digital output offers a darlington transistor and integral suppression diode for inductive load. The board interface to field logic signals, eliminating ground-loop problems and isolating the host computer from damaging voltages. The DB-24C has one 37-pin D-sub connector, one 50-pin OPTO-22 compatible male header and one 20-pin male header.

The transistor is energized by applying a 5-voltage signal to the appropriate input channels on the 50-pin header or 20-pin header or 37-pin D-sub connector. Twenty-four enunciator LEDs, one for each transistor, light when their associated transistor is activated. Because there is a 37-pin D-sub connector on the board, the user may use it to interface to any TTL output board. In other words, the user may use it as a general purpose open-collector output board

7.1. Features

- Group A (high nibble), Group B (low nibble), C (byte) and Group D has 24-channel open-collector output each. The maximum load is 600 mA per channels.
- Accept 20-pin connector to control 16 high current output channels.
- LEDs indicate each channel and power status.
- 3,750 V optical isolation
- 5 V_{DC} logic levels

7.2. Applications

- LEDs indicate the status of transistor
- Screw terminals for easy field wiring
- OPTO-22 Compatible connector.
- D-sub connector 37-pin connector connects directly to PIO-D144, PIO-D96 and PIO-D24 board or another OPTO-22 board with ADP-37 adapter

7.3. Specification

The maximum loading current of each high current output channel: 600 mA


Power consumption: 0.4 A @ +5 V_{DC} max.

Dimension (L x W): 170 mm x 114 mm

Operating Temperature: 0~60 °C


Storage Temperature: -20~70 °C

Humidity: 5% ~ 90% RH, non-condensing

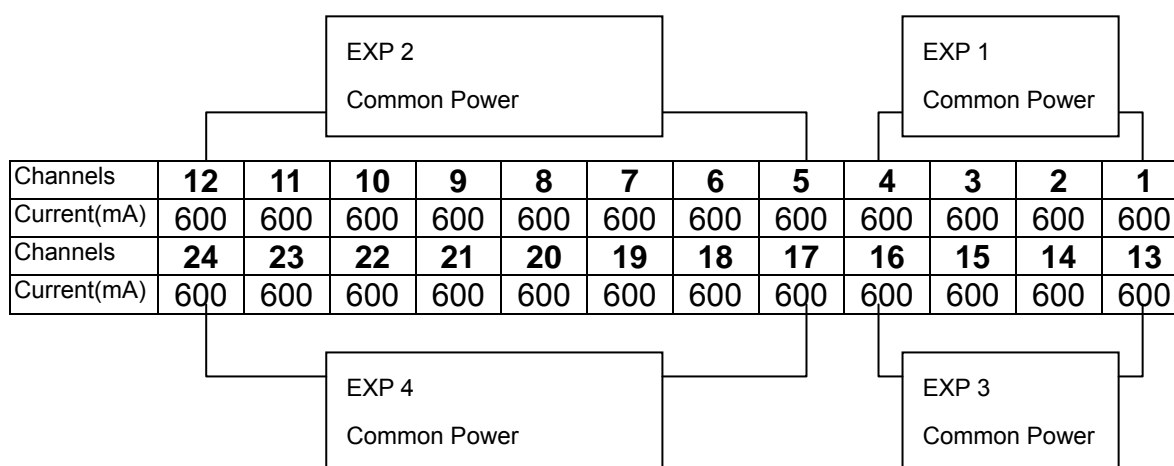


Power	EXP1	EXP2	EXP3	EXP4
Input Voltage	5~30 V _{DC}	5~30 V _{DC}	5~30 V _{DC}	5~30 V _{DC}
Input Current	2.4 A	4.8 A	2.4 A	4.8 A
Fuse Protection	1 A	1 A	1 A	1 A

7.4. Layout

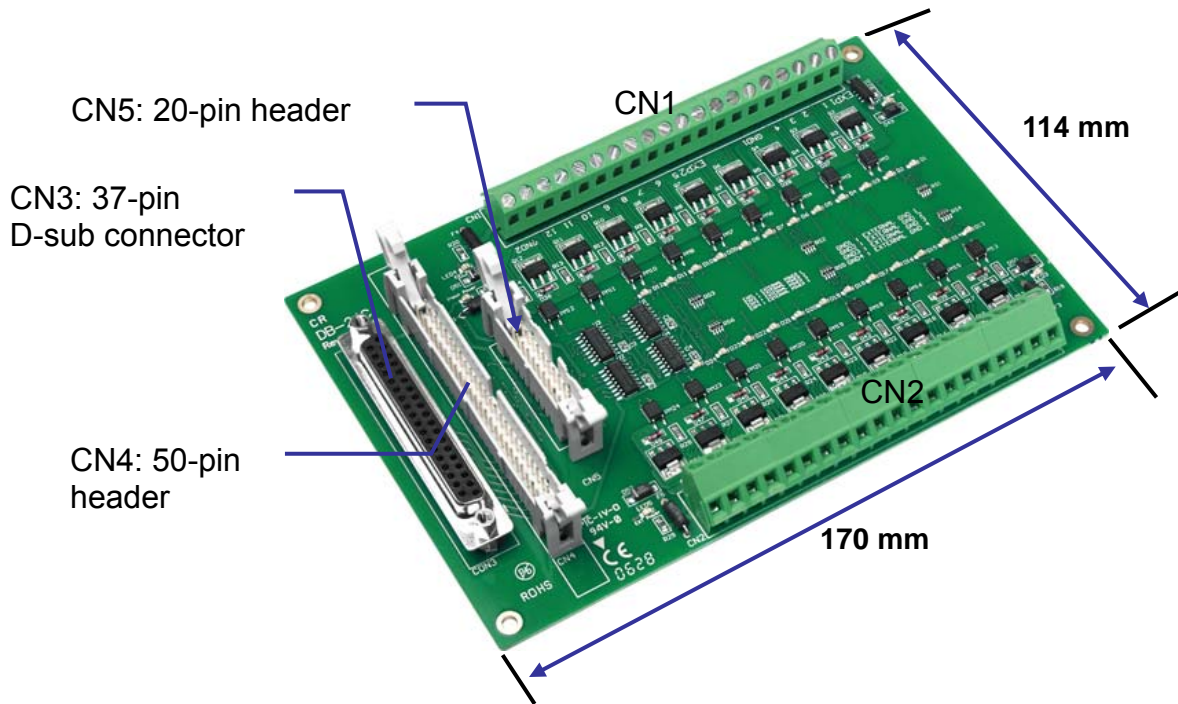


CN1 : External Power: 5~30 V_{DC}



GND	GND	12	11	10	9	8	7	6	5	Exp2
-	-	600	600	600	600	600	600	600	600	+

CH5~12 Max. Load :600 mA


External Power: 5~30 V_{DC}



GND	GND	4	3	2	1	Exp1
-	-	600	600	600	600	+

CH1~4 Max. Load :600 mA


CN2 : External Power: 5~30 V_{DC}



GND	GND	24	23	22	21	20	19	18	17	Exp4
-	-	600	600	600	600	600	600	600	600	+

CH17~24 Max. Load :600 mA


External Power: 5~30 V_{DC}




GND	GND	16	15	14	13	Exp3
--	-	600	600	600	600	+

CH13~16 Max.

7.5. Block Diagram

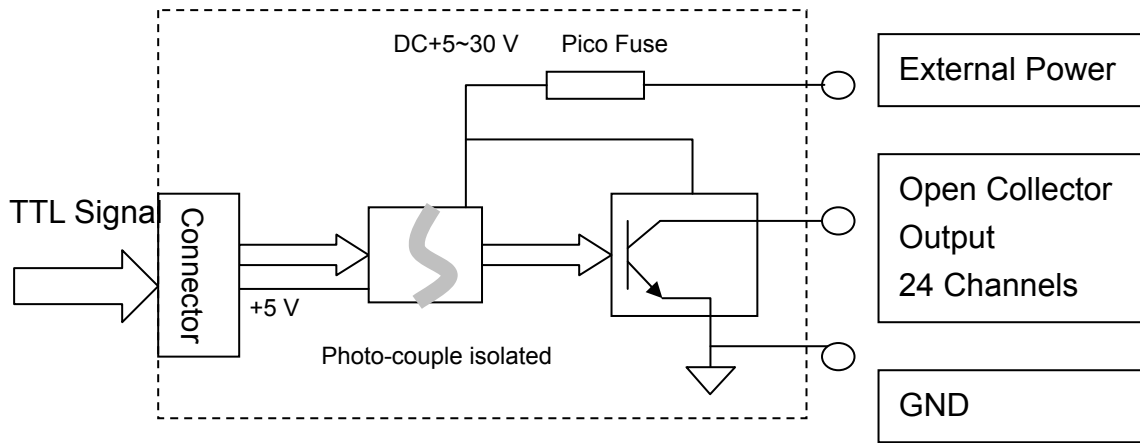

Open Collector Output Wiring Diagram

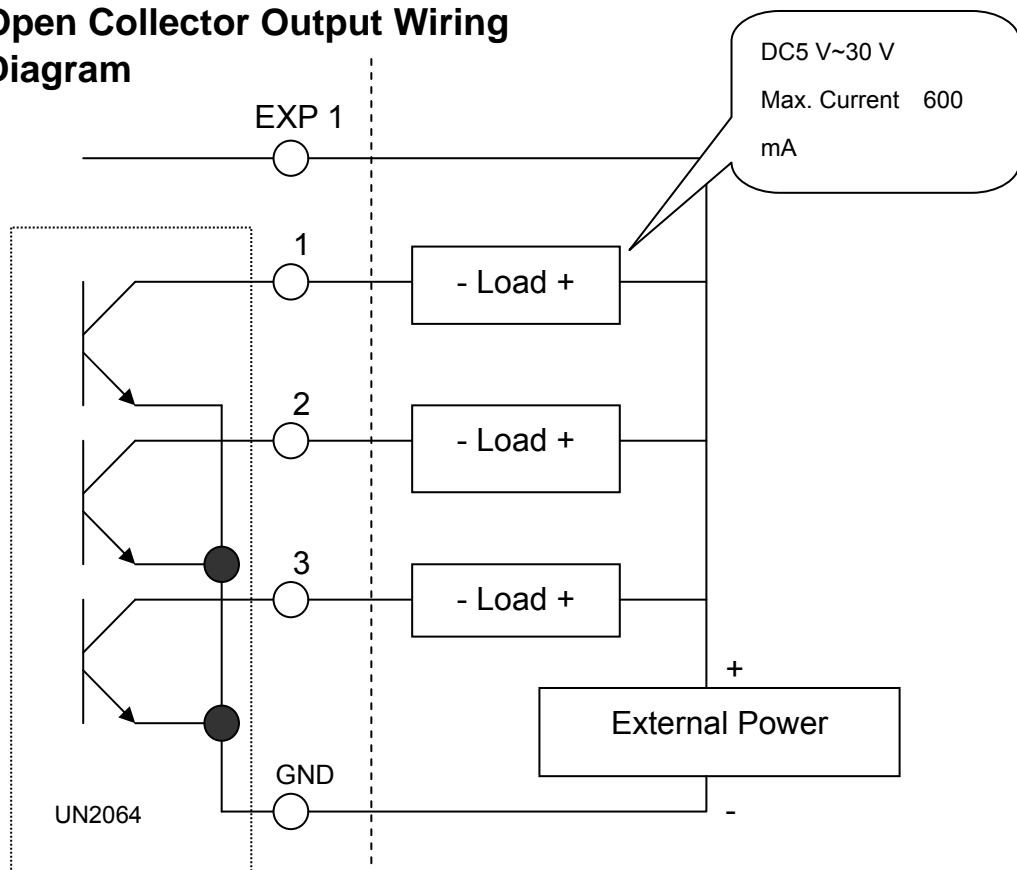

Output Current : 600 mA (Max.) for each channels.
It will be damaged if overloaded .

8. DB-24OD

24-Channel Open Drain Output Board

The DB-24OD has 24-channel optically isolated digital output. The board is the interface for field logic signals, elimination ground-loop problems and isolating the host computer from damaging voltages. The DB-24OD has a single 37-pin D-sub connector, one 50-pin OPTO-22 compatible male header and a 20-pin male header. The transistor is powered by applying a 5-volt signal to the appropriate input channel on the 50-pin header, the 20-pin header or the 37-pin D-sub connector. Twenty-four indicator LEDs, one for each transistor, are lit when their associated transistor is activated. The board may be used to interface with any TTL output board, allowing it to be used as a general purpose open-drain output board.

8.1. Features

- 24-channel high current open-drain output.
- Connects directly to OPTP-22 compatible board or any 722,724 series board
- 24-channel max load 400 mA (per channel)
- LEDs indicate each channel and power status
- 3,750 V optical isolation
- 5 V_{DC} logic levels

8.2. Specification


- The maximum loading current of each high current output channel: 400 mA.
- Power consumption: 0.4 A @ +5 V_{DC} max.
- Dimension (L x W) :223.5 mm x 135.5 mm
- Operation Temperature :0~60 °C
- Storage Temperature :-20~70 °C
- Humidity :5% ~ 90% RH, non-condensing

8.3. Application

- On/off control
- Energy management
- Test Automation
- Process Control

Power	EXPWR1	EXPWR2	EXPWR3
Input Voltage	10~24 V _{DC}	10~24 V _{DC}	10~24 V _{DC}
Input Current	250 mA	250 mA	250 mA


8.4. Layout

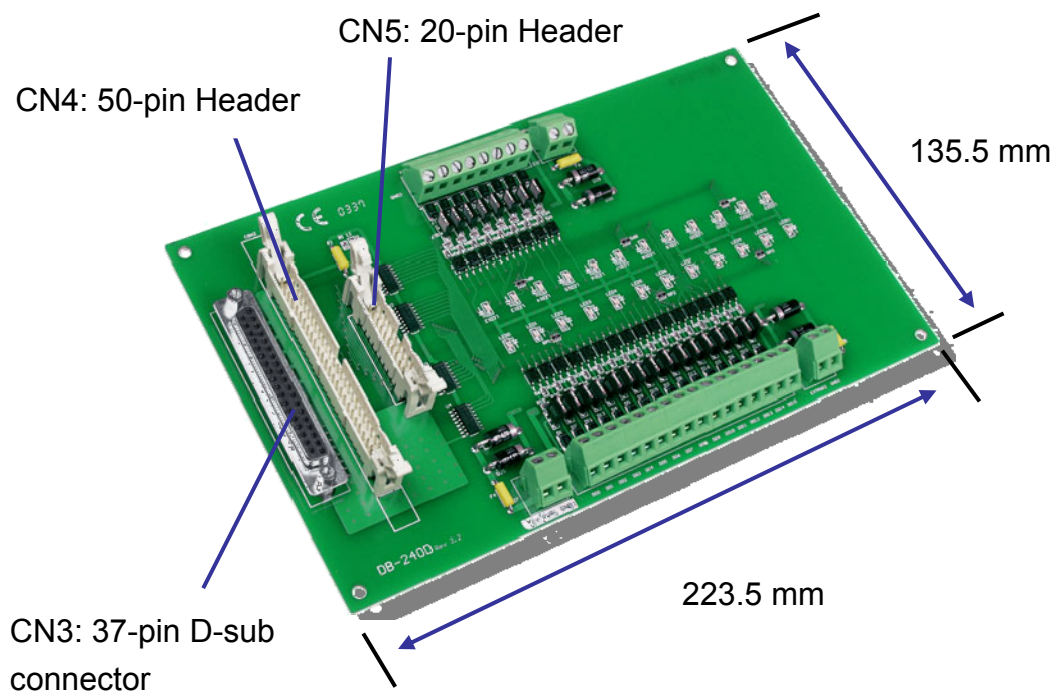

8.5. Pin Assignment

External Power Input	Output pin
EXPWR1, GND1	D0~D7
EXPWR2, GND2	D8~D15
EXPWR3, GND3	D16~D23

8.6. Block Diagram

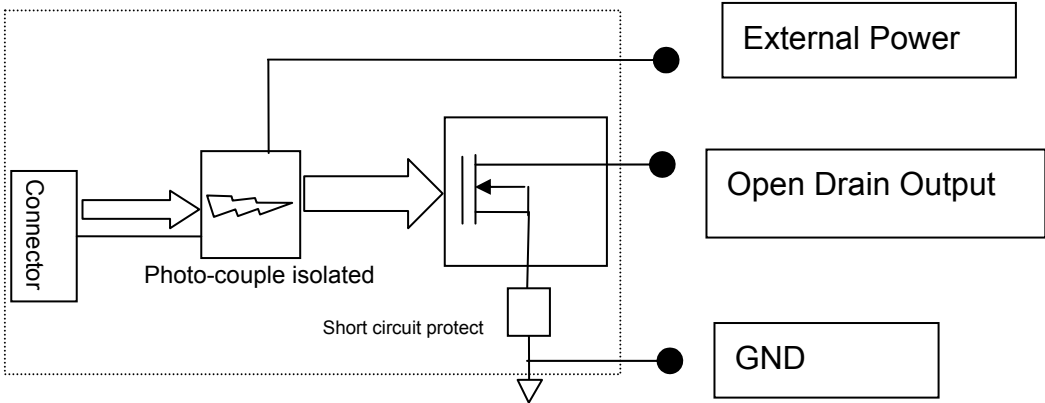

9. DB-24POR

24-Channel Photo Output Board

The DB-24POR includes 24 normally open, form A, Photo-MOS relays. The board interface to field logic signals, eliminating ground-loop problems and isolating the host computer from damaging voltages. The user can use the DB-24POR to switch load, up to 350 V_{AC} and up to 130 mA. The relay is energized by applying a 5 voltage signal to the appropriate relay channel on the 50-pin OPTO-22 compatible connector or 37-pin D-sub connector. Twenty-four indicators LEDs, one for each relay, light when their associated relay is activated. Because there is a D-sub 37-pin connector on the board, the user may use it to interface to any TTL output board. In other words, the user may use it as a general-purpose photo-MOS relay output board.

9.1. Features

- 24 Optically isolated digital output channels
- 24 form A photo-MOS relays
- Switch up to max. 0.13 A at max. 350 V_{AC}
- 5 V_{DC} logic levels
- 5,000 V optically isolation
- LEDs indicated relay status
- Built-in fuses and diodes to protect from wrong connection of external power supply.
- 50-pin header connector directly to DIO-24, DIO-48, DIO144 and PIO-D144, PIO-D96, PIO-D56, PIO-D48, PIO-D24 and other OPTO-22 compatible digital output boards.
- D-sub 37-pin connector connects directly to PIO-D144, PIO-D96, PIO-D56, PIO-D48 and PIO-D24 digital output boards.

9.2. Applications

- ON/OFF Control
- Energy management
- IC factory Automation
- Test Automation


9.3. Specification

- Photo-MOS Relay


Item	Spec.	Note
Turn On Time	0.7 mS	Typical
Turn Off time	0.05 mS	Typical
Output On resistance	23 Ω	Typical
Load Voltage	350 V _{AC}	Peak AC
Continuous load current	130 mA	Peak AC
Power dissipation	500 mW	
Input / Output Isolation	5,000 V	

- Dimensions (L x W): 213 mm x 132 mm
- Operating Temperature : 0~60°C
- Storage Temperature: -20°C~70°C
- Humidity : 5% ~ 90% RH, non-condensing

9.4. Layout

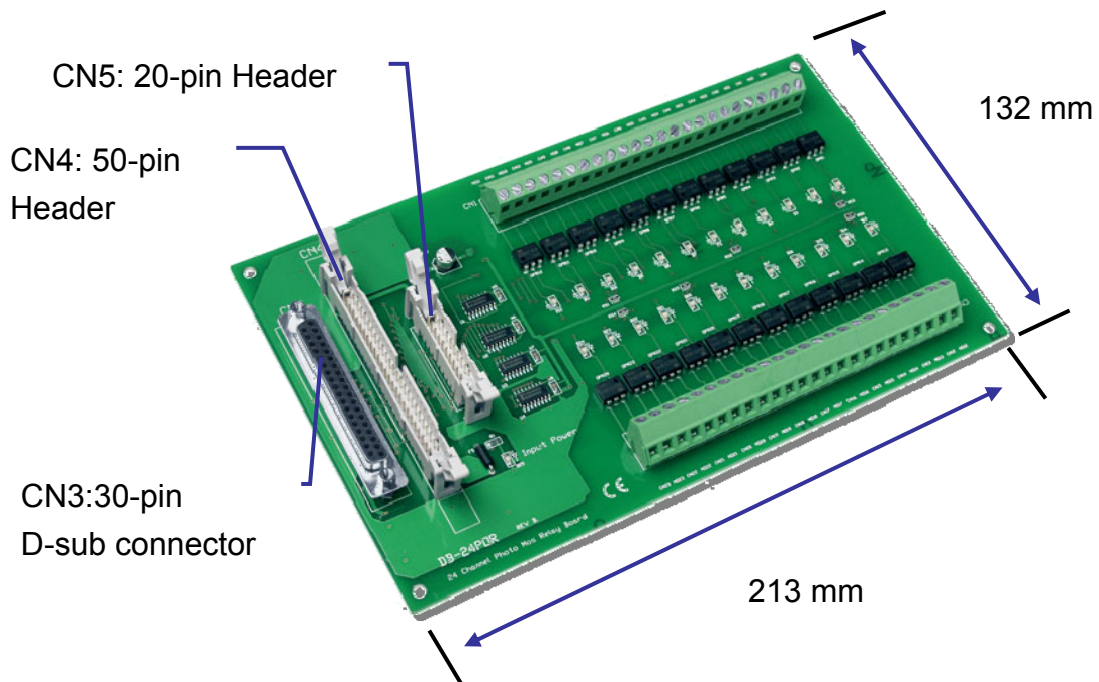


Channel 0~23	NO _n	CM _n
Form A	Normal Open	Common




Form A type Photo-MOS Relay

9.5. Block diagram

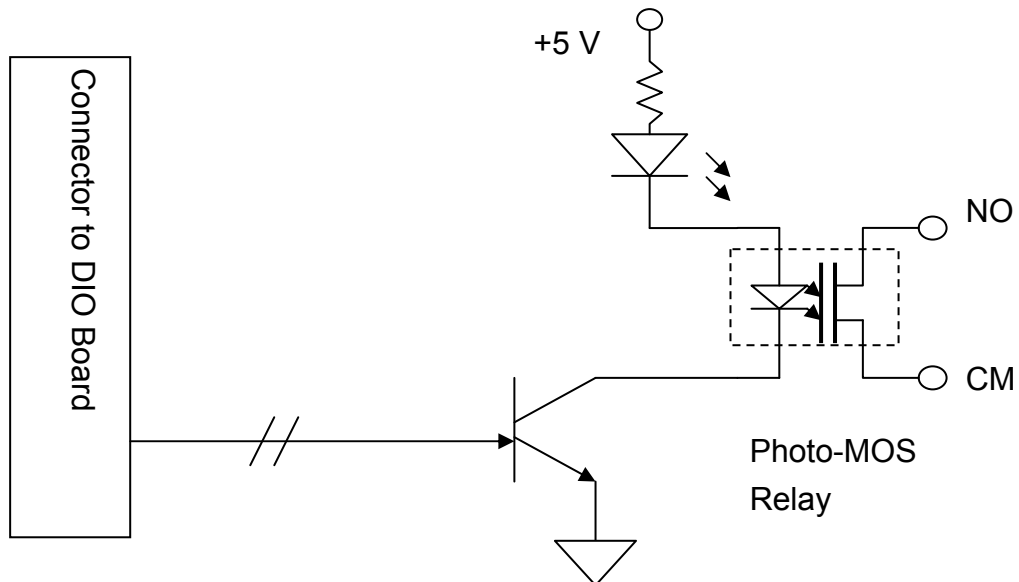

9.6. Wiring Diagram

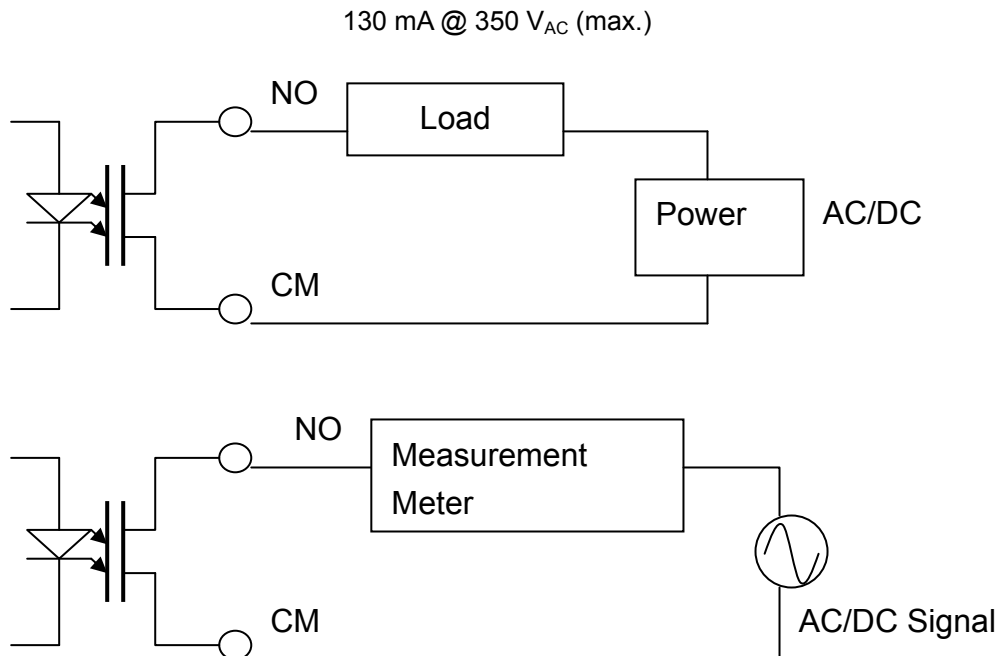

9.7. Pin Assignment

For DB-24C/DB-24OD/DB-24POR

CN3 Pin Assignment

CH0	37	○	○	19	GND
CH1	36	○	○	18	N.C.
CH2	35	○	○	17	GND
CH3	34	○	○	16	N.C.
CH4	33	○	○	15	GND
CH5	32	○	○	14	N,C,
CH6	31	○	○	13	GND
CH7	30	○	○	12	N.C.
CH16	29	○	○	11	GND
CH17	28	○	○	10	CH08
CH18	27	○	○	9	CH9
CH19	26	○	○	8	CH10
CH20	25	○	○	7	CH11
CH21	24	○	○	6	CH12
CH22	23	○	○	5	CH13
CH23	22	○	○	4	CH14
GND	21	○	○	3	CH15.
+5 V	20	○	○	2	N.C.
		○	○	1	N.C.

CN4 Pin Assignment

GND	50	○	○	49	+5 V input
GND	48	○	○	47	CH0
GND	46	○	○	45	CH1
GND	44	○	○	43	CH2
GND	42	○	○	41	CH3
GND	40	○	○	39	CH4
GND	38	○	○	37	CH5
GND	36	○	○	35	CH6
GND	34	○	○	33	CH7
GND	32	○	○	31	CH8
GND	30	○	○	29	CH9
GND	28	○	○	27	CH10
GND	26	○	○	25	CH11
GND	24	○	○	23	CH12
GND	22	○	○	21	CH13
GND	20	○	○	19	CH14
GND	18	○	○	17	CH15
GND	16	○	○	15	CH16
GND	14	○	○	13	CH17
GND	12	○	○	11	CH18
GND	10	○	○	9	CH19
GND	8	○	○	7	CH20
GND	6	○	○	5	CH21
GND	4	○	○	3	CH22
GND	2	○	○	1	CH23

CN5 Pin Assignment

CH1	2	○	○	1	CH0
CH3	4	○	○	3	CH2
CH5	6	○	○	5	CH4
CH7	8	○	○	7	CH6
CH9	10	○	○	9	CH8
CH11	12	○	○	11	CH10
CH13	14	○	○	13	CH12
CH15	16	○	○	15	CH14
GND	18	○	○	17	GND
N.C.	20	○	○	19	+5 V

Note:

+5 V : Power input DC +5 V

GND: Power's Ground

CHn : TTL's Signal

10. DB-24SSR/DB-24SSRDC

24-Channel Solid State Relay Board

The DB-24SSR/DB-24SSRDC includes 24 normally open, or form A, solid-state relays. The board interface to field logic signals, eliminating ground-loop problems and isolating the host computer from damaging voltages. The user can use the DB-24SSR/DB-24SSRDC to switch high voltage load, up to 240 V_{AC}/50 V_{DC} and up to 4 A. The relay is energized by applying a 5-voltage signal to the appropriate relay channel on the 50-pin header or 37-pin D-sub connector. Twenty-four enunciator LEDs, one for each relay, light when their associated relay is activated. Because there is a D-sub 37-pin connector on the board, the user may use it to interface to any TTL output board. In other words, the user may use it as a general purpose solid state relay output board.

10.1. Features

- 24 optically isolated digital output channels
- 24 form A solid-state relays
- Switch up to 4 A at 250 V_{AC}/50 V_{DC} for DB-24SSR/DB-24SSRDC
- 5 V_{DC} logic levels
- 2,500 V_{AC} optical isolation
- Screw terminal for easy field wiring
- Can choose plug-in screw-terminal, modification and ensuring simple installation, modification and maintenance
- 50-pin header connects directly to DIO-24, DIO-48, DIO144, PIO-D144, PIO-D96, PIO-D48, and PIO-D24 OPTO-22 compatible board
- D-Sub 37-pin connector connects directly to PIO-D144, PIO-D96, PIO-D48 and PIO-D24 board or another OPTO-22 board with ADP-37 adapter
- Built-in varistor for DB-24SSR only

10.2. Applications



- ON/OFF control
- Energy management
- Test Automation
- Process Control

10.3. Specification


	DB-24SSR	DB-24SSRDC
Solid State Relay	AC	DC
Load Voltage	50~250 V _{AC}	3~50 V _{DC}
Maxi. Load Current	4 A	
Repetitive Peak OFF Voltage	600 V	1 mA
Max. "ON-state" Voltage Drop	1.5 V	1.2 V
Surge Current	50 A	10 A
Maxi. "OFF-State" Leakage Current	5 mA	1 μA
Mini. Load Current	20 mA	1 mA
Breakdown Voltage	2,500 V (Between Input & Output)	
Insulation resistance. i.	100,000,000 Ω(min.)	
Operate time , 1/2 cycle of voltage sine wave	1 ms (max.)	0.5 ms (max.)
Zero Crossing	Yes	
Snubber Circuit	Yes	

- Power Consumption: 0.4 A @ +5 V (max.)
- Dimension (L x W): 220 mm x 130 mm
- Operation Temperature : 0~60°C
- Storage Temperature : -20°C~70°C
- Humidity : 5% ~ 90% RH, non-condensing

10.4. Layout

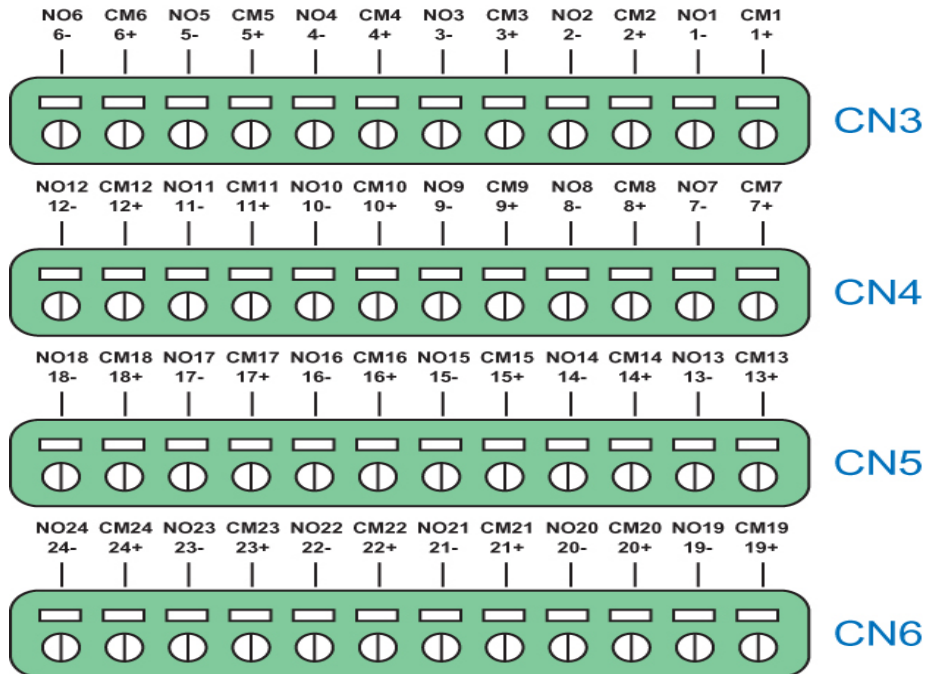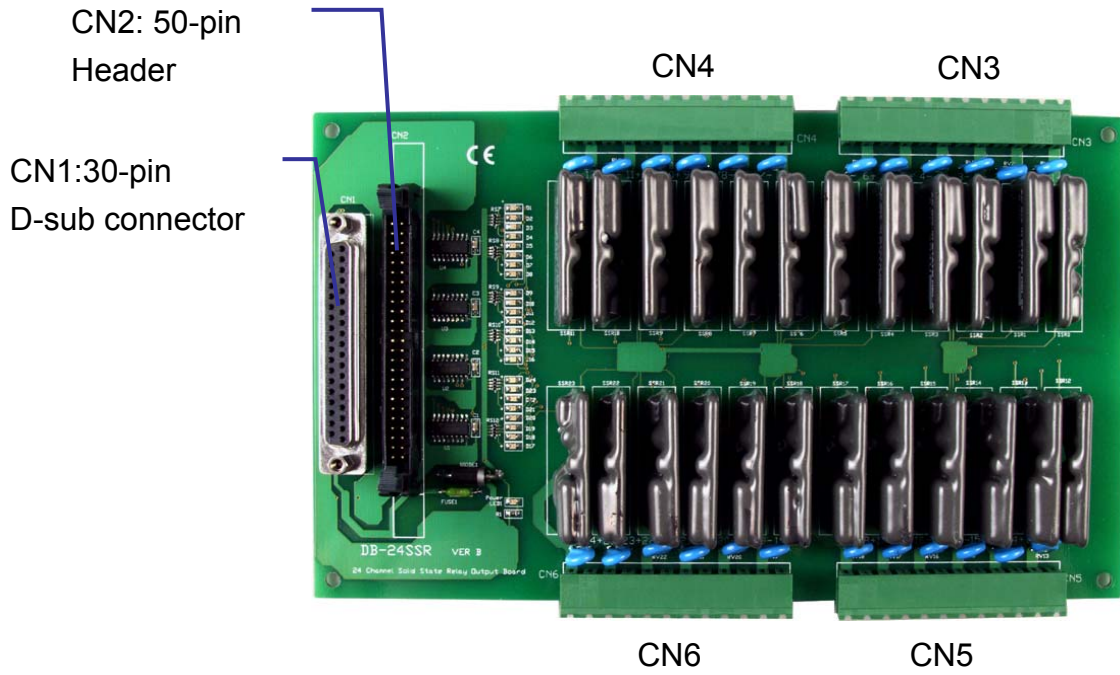


Channel 0~23	NO_n	CM_n
Form A	Normal Open	Common

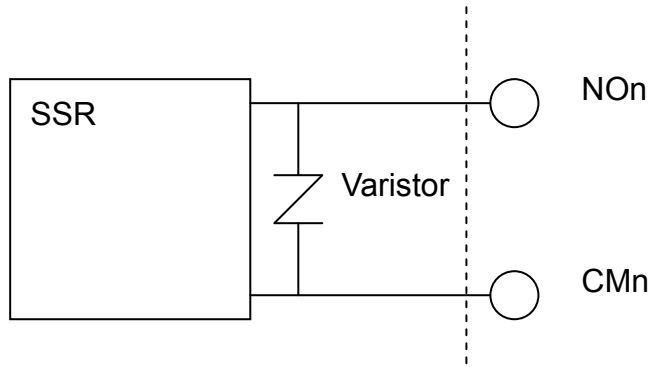


10.5. Block Diagram

DB-24SSR

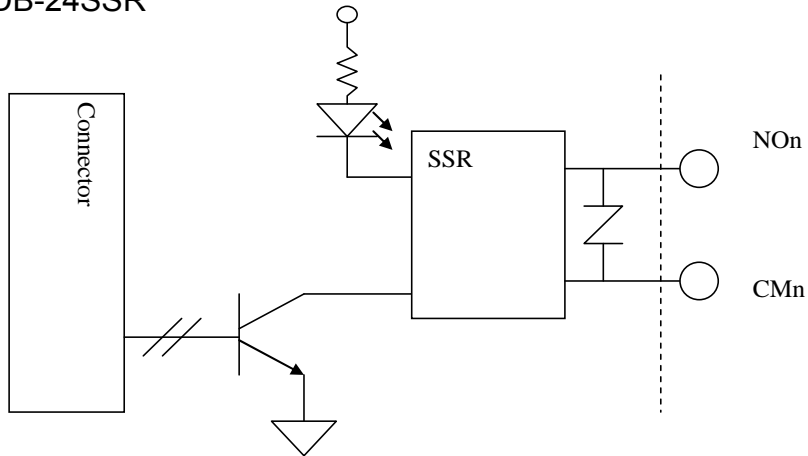


DB-24SSRDC

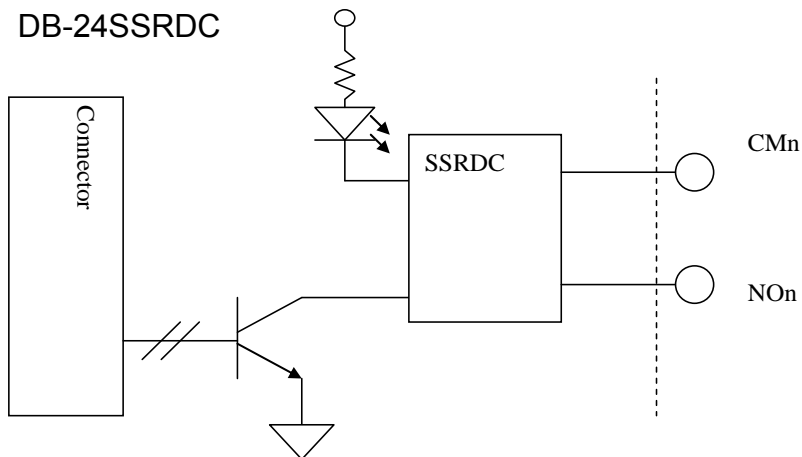


10.6. Wiring Diagram

DB-24SSR

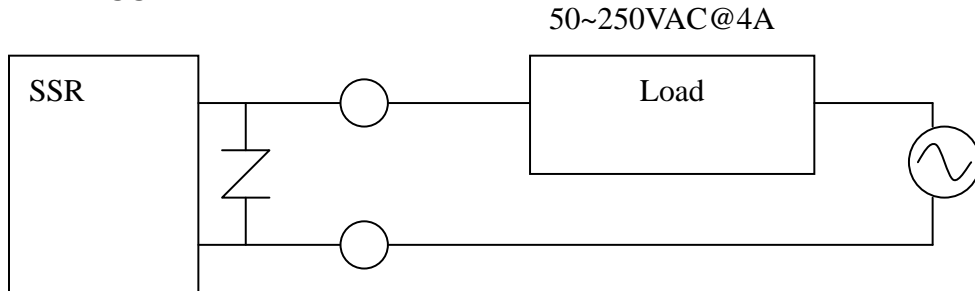

DB-24SSRDC

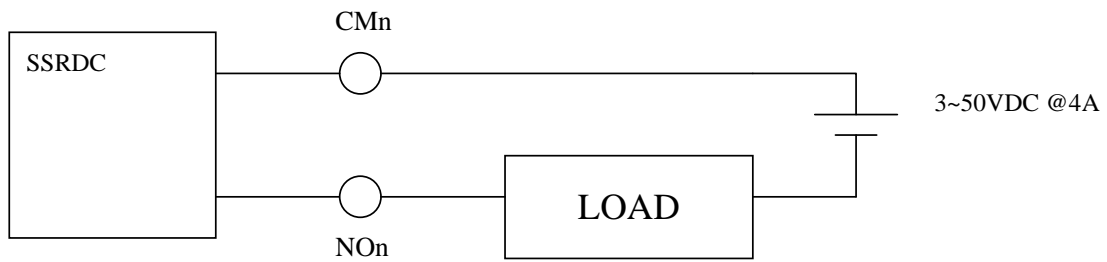

10.7. Pin Assignment

CN1 Pin Assignment

CH0	37	○	○	19	GND
CH1	36	○	○	18	N.C.
CH2	35	○	○	17	GND
CH3	34	○	○	16	N.C.
CH4	33	○	○	15	GND
CH5	32	○	○	14	N.C.
CH6	31	○	○	13	GND
CH7	30	○	○	12	N.C.
CH16	29	○	○	11	GND
CH17	28	○	○	10	CH08
CH18	27	○	○	9	CH9
CH19	26	○	○	8	CH10
CH20	25	○	○	7	CH11
CH21	24	○	○	6	CH12
CH22	23	○	○	5	CH13
CH23	22	○	○	4	CH14
GND	21	○	○	3	CH15.
+5 V	20	○	○	2	N.C.
		○	○	1	N.C.

CN2 Pin Assignment

GND	50	○	○	49	+5 V input
GND	48	○	○	47	CH0
GND	46	○	○	45	CH1
GND	44	○	○	43	CH2
GND	42	○	○	41	CH3
GND	40	○	○	39	CH4
GND	38	○	○	37	CH5
GND	36	○	○	35	CH6
GND	34	○	○	33	CH7
GND	32	○	○	31	CH8
GND	30	○	○	29	CH9
GND	28	○	○	27	CH10
GND	26	○	○	25	CH11
GND	24	○	○	23	CH12
GND	22	○	○	21	CH13
GND	20	○	○	19	CH14
GND	18	○	○	17	CH15
GND	16	○	○	15	CH16
GND	14	○	○	13	CH17
GND	12	○	○	11	CH18
GND	10	○	○	9	CH19
GND	8	○	○	7	CH20
GND	6	○	○	5	CH21
GND	4	○	○	3	CH22
GND	2	○	○	1	CH23

Note:

+5 V : Power input DC +5 V

GND: Power's Ground

CHn : TTL's Signal

11. DB-24P/DB24PD

24 Photo-Isolated Digital Input Terminal

Board

The general specification of DB-24P is the same as DB-16P. But DB-24P has one Opto-22 compatible 50-pin connector and can be used for 24 channel photo-isolated digital input.

The DB-24PD is almost the same as DB-24P. But DB-24PD has one 37-pin D-sub connector.

11.1. Features

- 24 optically isolated digital input
- Connect to DIO-24, DIO-48, DIO-144 or any OPTO-22 compatible connector of digital input / output board.
- DB-24PD connect to PIO-D144 , PIO-D96 , PIO-D48 and PIO-D24
- AC/DC Signal Input
- AC Signal Input with filter
- Input buffer with voltage comparators
- 1,000 V isolation
- Each channel has it's LED indicator

11.2. Applications

- Isolated digital input sensing
- Process monitoring

11.3. Specification

- I/O connector Electrical Specifications
 - Configuration: optically isolated digital input channels
 - Compatibility: TTL compatible
- * Digital Input
 - Number of channels: 24 Channels
 - Each channel with its own ground reference isolated from other channels
 - Maximum input voltage: $24 V_{DC}$ or $24 V_{AC}$

Digital Logic Level:

Level	Minimum	Maximum
Input low voltage (DC or peak AC)	0	+/-1 V
Input high voltage DC 1 kHz AC	+/- $3.8 V_{DC}$ $4 V_{rms}$	+/- $24 V_{DC}$ $24 V_{AC}$

Input impedance: 1.2 k

Input Current



5 V inputs : 4 mA /channel

24 V inputs : 20 mA /channel


Input Response Time : $20 \mu s$ without filter/2.2 ms with filter

- Power consumption : DB-24P 290 mA/ +5 V (Max) from PC
- Board Dimensions (L x W) : 213 mm X 132 mm
- Operating Environment
 - Component temperature : $0 \sim 50^{\circ}C$
 - Relativity humidity : 5% ~ 90% RH, non condensing
- Storage Environment
 - Temperature: $0 \sim 60^{\circ}C$
 - Relative humidity: 5% ~ 90 % RH, non condensing


11.4. Layout

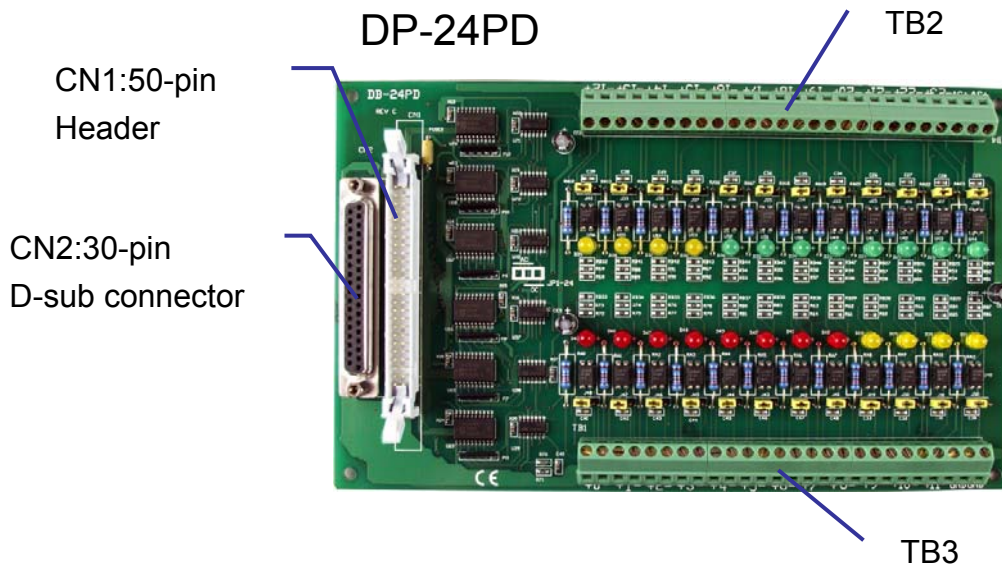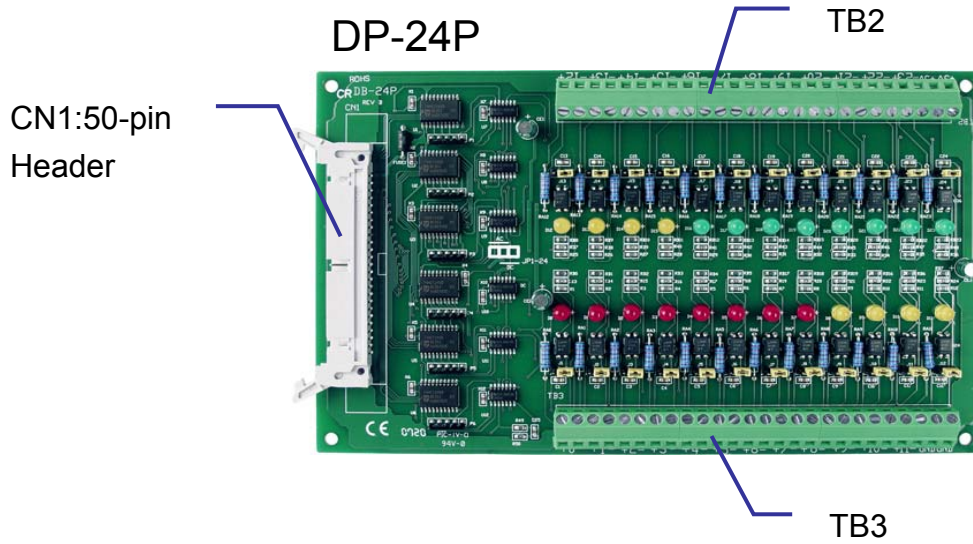

11.5. Jumper setting




For AC signal with filter




For DC signal without filter

If you are using AC signal, you must short the AC FILTER jumper. If you are using DC input signals, the AC FILTER is optional. If the response time of input signals less than 20 μ s, set the filter off. If you want a slow response (about 5 ~ 10 ms) for rejecting noise or contact bouncing, short the AC FILTER jumper.

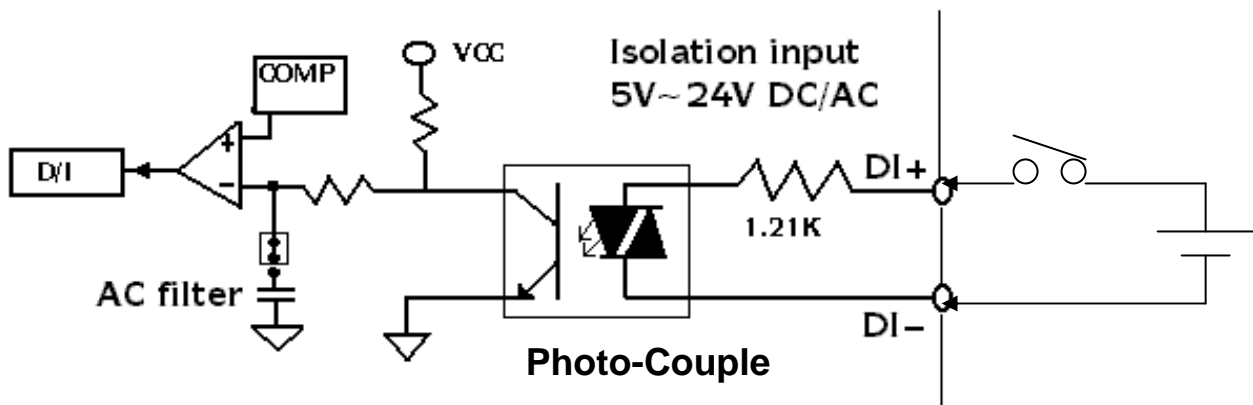

11.6. Isolated Input

The normal input voltage range is 5 ~ 24 V_{AC} or V_{DC}. The normal input range can be changed by choosing suitable resistor to limit the current through the Photo-isolator to about 10 mA (I_f). The default resistor is 1.2 kΩ/1 W.

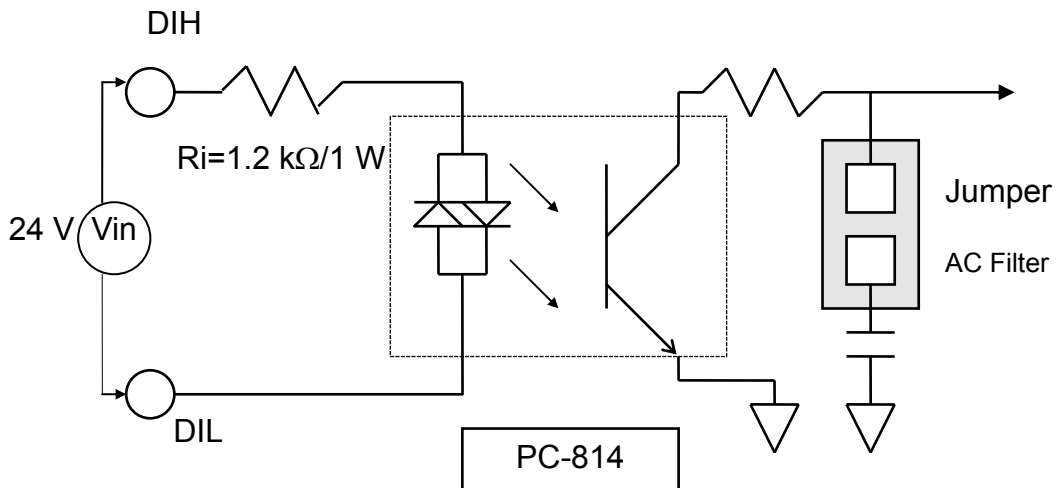

$$R_i = V_{in}/I_f$$

$$P_w = V_{in} \times I_f$$

Calculation Example:

$$\text{If } V_{in} = 120 \text{ V then } R_i = 120(\text{V}) / 0.01(\text{A}) = 12 \text{ k}\Omega$$

$$P_w = 120(\text{V}) \times 0.01(\text{A}) = 1.2 \text{ W}$$

The R_i must be replaced by 12 kΩ/2 W (1.2 W)

- **TB3 Pin Assignment**

Pin Number	1	2	3	4	5	6	7	8	9	10	11	12	13
Label	0H	0L	1H	1L	2H	2L	3H	3L	4H	4L	5H	5L	6H

Pin Number	14	15	16	17	18	19	20	21	22	23	24	25	26
Label	6L	7H	7L	8H	8L	9H	9L	10H	10L	11H	11L	GND	GND

- **TB2 Pin Assignment**


Pin Number	1	2	3	4	5	6	7	8	9	10	11	12	13
Label	12H	12L	13H	13L	14H	14L	15H	15L	16H	16L	17H	17L	18H

Pin Number	14	15	16	17	18	19	20	21	22	23	24	25	26
Label	18L	19H	19L	20H	20L	21H	21L	22H	22L	23H	23L	+5 V	+5 V

● DB-24P/24PD: CN1 OPTO-22 Connector Pin Assignment

37-pin D-sub connector Pin Assignment (DB-24PD only)

50-Pin Pin Assignment

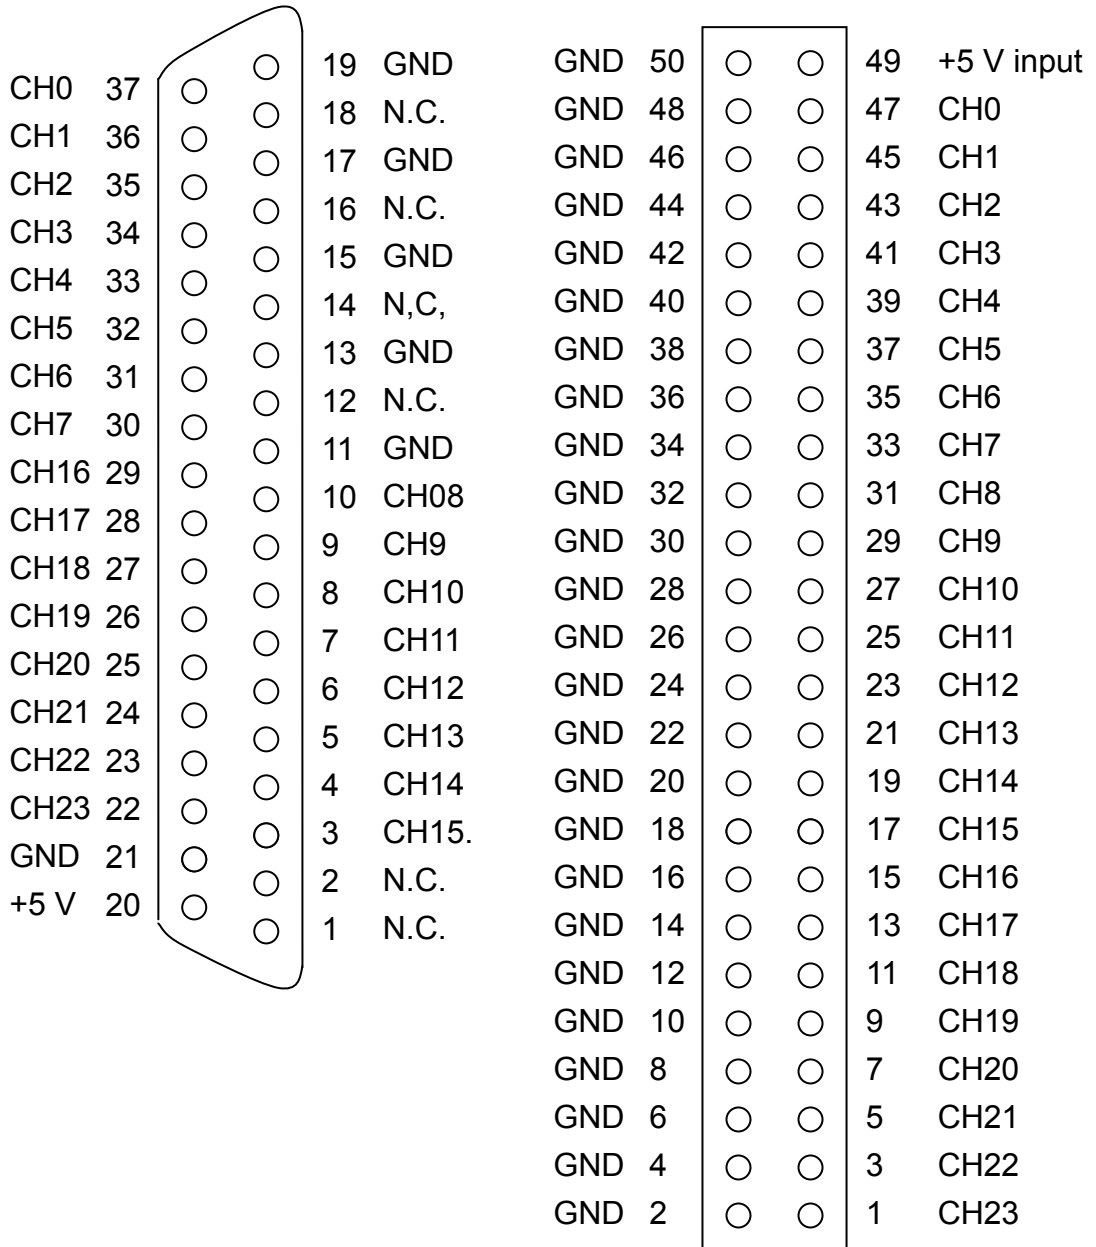

Note:

+5 V : Power input DC +5 V


GND: Power's Ground

CHn : TTL's Signal


12. Configuration

12.1. Connect to DIO Board

DB-16P / DB-16R connect to 20-pin digital input /
output connector

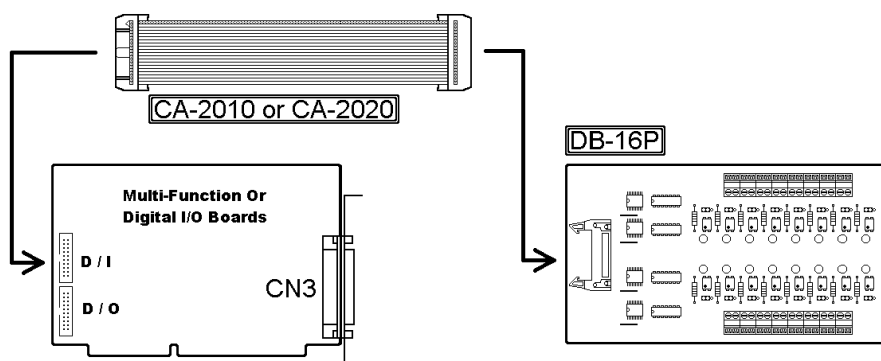


DB-16P linked to digital input port of multi-function board

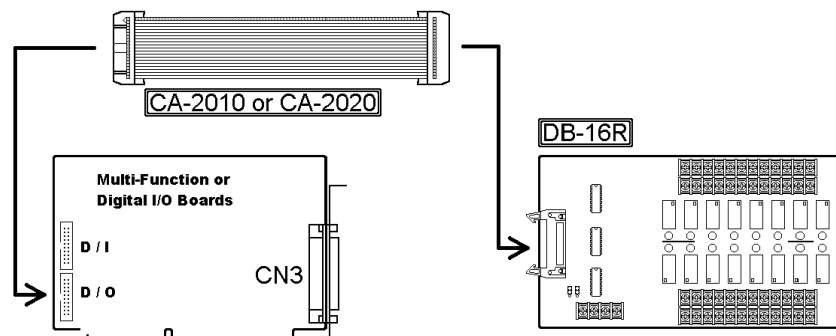


DB-16R linked to digital output port of multi-function board

The DB-16P / DB-16R linked to Multi-Function board via ADP-20 extender.

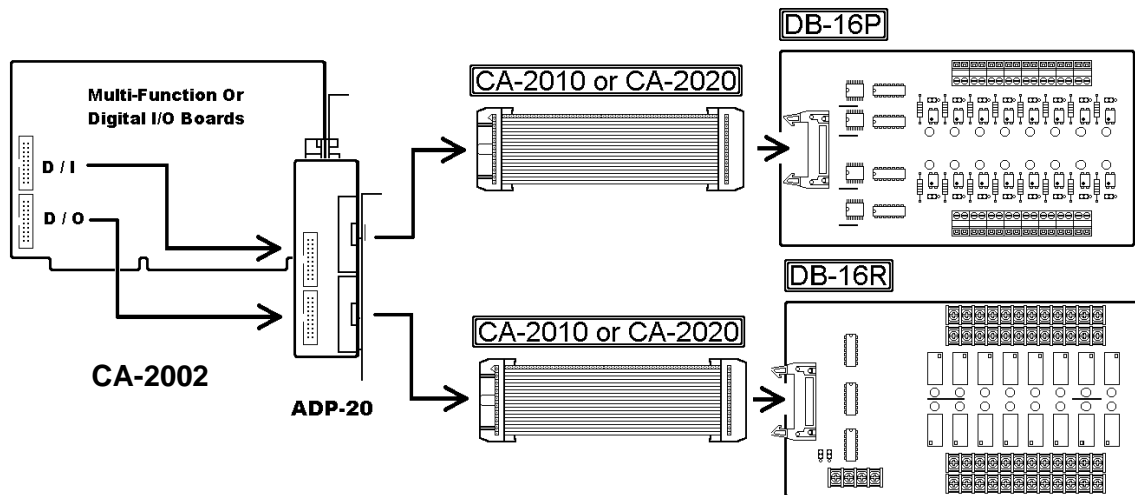


50-pin OPTO-22 compatible connector directly connected

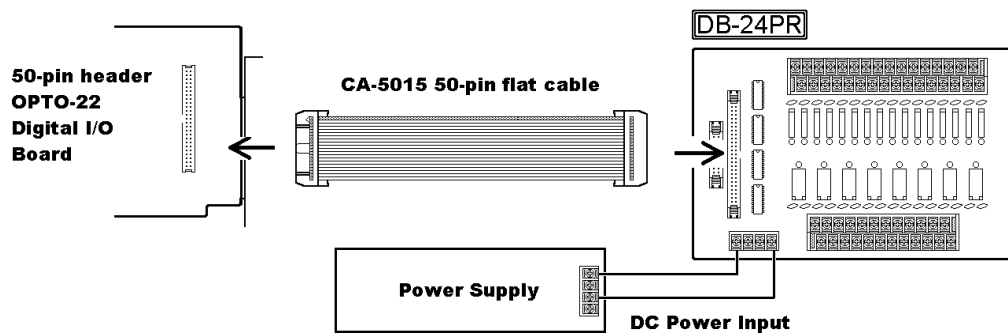


DIO-24
DIO-48
DIO-144
PIO-D144
PIO-D96
PIO-D48

DB-24R / DB-24RD
DB-24PR / DB-24PRD
DB-24C / DB-24POR
DB-24SSR

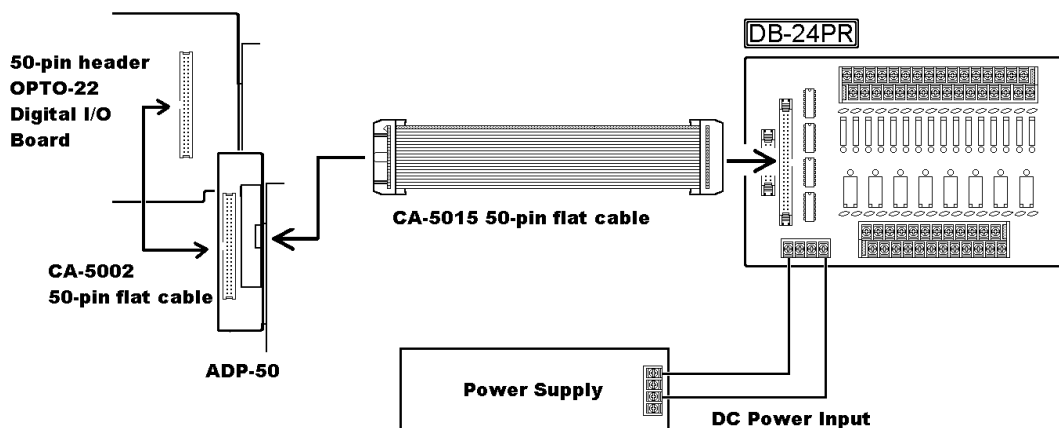


Connect to 37-pin D-sub connector

PIO-D144 / PIO-D96 / PIO-D48
37-pin D-sub DI/O card

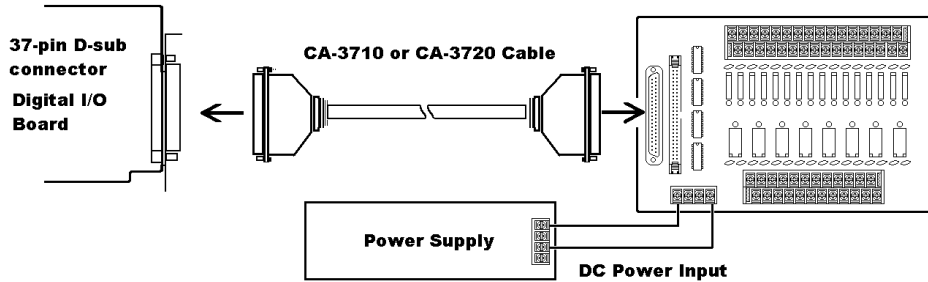

DB-24RD
DB-24PRD
DB-24C / DB-24POR
DB-24SSR


50-pin header converts to 37-pin
D-sub connector via the ADP-37

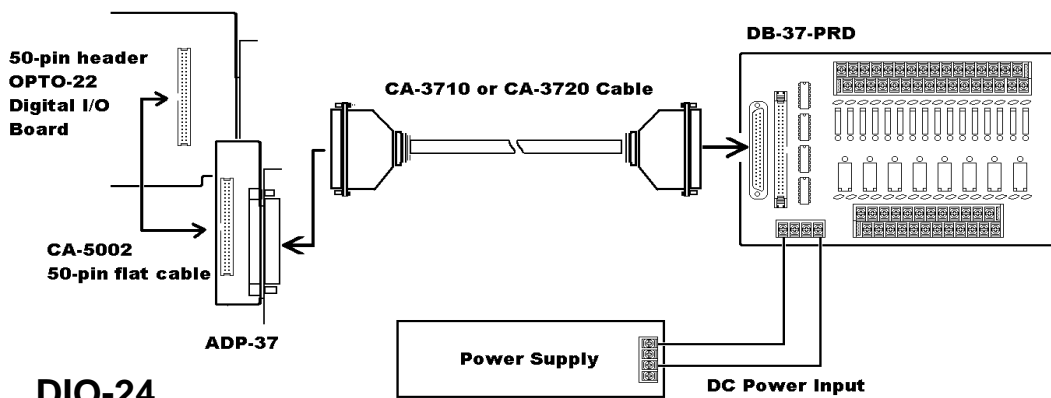

DIO-24
DIO-48
DIO-144
PIO-D144
PIO-D96
PIO-D48

12.2. DIN-Rail Mounting

The DB-24P, DB-24R, DB-24PR, DB-24C, DB-24POR, DB-24SSR, DB-16P8R series daughter boards can choose DIN-OPTO22 kit for DIN-Rail mounting.

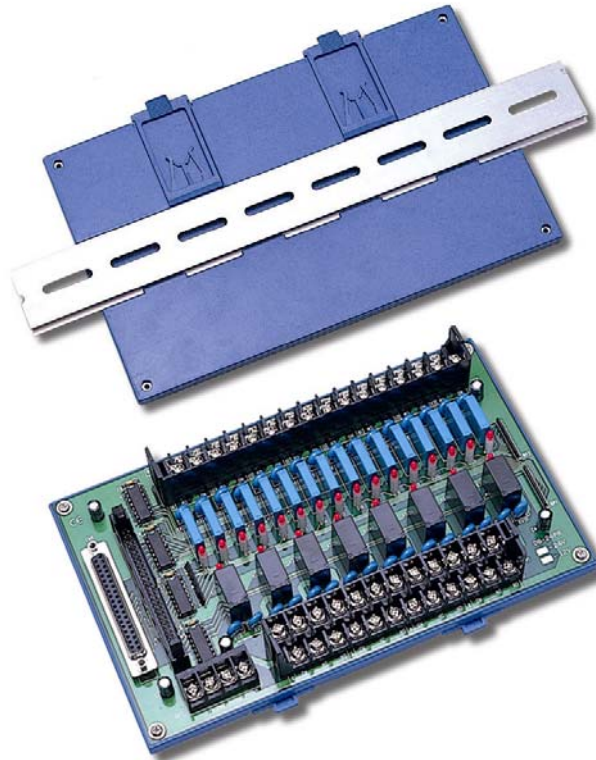

DB-24P/DIN
DB-24PD/DIN
DB-24R/DIN
DB-24RD/DIN
DB-24PR/DIN
DB-24PRD/DIN
DB-24C/DIN
DB-24POR/DIN
DB-24SSR/DIN
DB-16P8R/DIN

