# Wzzard LRPv2 Node

# **Industrial LoRaWAN Node**



# **Features**

- Long-range wide area IoT application
- Optional solar or battery power input for low power consumption
- LoRaWAN protocol for closed and public system applications
- Provides connectivity to industry-standard analog or digital sensors
- Rugged, IP66-rated, fiber-reinforced polyester PBT enclosure



# Introduction

The Wzzard LRPv2 LoRaWAN node intelligent sensor platform enables you to quickly and easily create a complete connectivity stack between your sensors and applications via a network or the Internet. The platform uses intelligent edge nodes and a wireless LoRaWAN network to transmit analog or digital signals or Modbus RTU sensor data to a WISE-6610 LoRaWAN gateway or other LoRaWAN-compliant gateway device. The Wzzard LRPv2 LoRaWAN node can accommodate virtually any industry standard external sensors. Connections can be made via either conduit fittings or cable glands. This line of nodes provides various sensor interface options including digital I/O as well as general purpose analog inputs.

# **Specifications**

_					
D	•			_	104
_		w	и	r	

Two 3.6-V 2500-mAH lithium AA batteries\* Internal External Input 6 ~ 12 V<sub>DC</sub> Optional

#### Mechanical

12.7-mm (1/2") conduit, sensor interface cable Physical Connection included; 8-wire, 26-gage, 1.8-m (6') Sensor Inputs Analog input ( $\pm 10 \text{ V}_{DC}$ ,  $\pm 5 \text{ V}_{DC}$ ,  $\pm 1 \text{ V}_{DC}$ ,  $0 \sim 20 \text{ mA}$ ), digital input (0 ~ 48 V<sub>DC</sub>)

digital output (0 ~ 30 V<sub>DC</sub>)

 Optional External Antenna RP-SMA, omnidirectional, 1.5 dBi, 868 ~ 915

MHz; length, 170 mm (6.69")

Mounting Magnetic mounting via an internal magnet Holding force, 2.13 kg (4.7 lbs); four mounting

ears, M5 (#10)

Enclosure IP66-rated, fiber-reinforced polyester PBT

Weight 400 g

### **Technology**

Wireless LoRaWAN 868/915/923 MHz LED Network connectivity

#### **Environmental**

Installation Indoor or outdoor Operating Temperature -40 to 75°C (-40 to 167°F) Storage Temperature -40 to 85°C (-40 to 185°F) Operating Humidity 10 ~ 95% non-condensing

#### **Digital Inputs**

 Voltage Range  $0 \sim 48 \, V_{DC}$ - VIL 0.8 V (max.) = V<sub>IH</sub> 2 V (min.) Pull-Up Current 32 μΑ

Type Source/sink (PNP/NPN) software-selectable input

Isolation

#### **Digital Outputs**

 Voltage Range 0 ~ 30 Vnc Open drain Output Type Output Current 200 mA max

Protection Current limit protection

Isolation None

#### **Analog Inputs**


 Input Range  $\pm 10 \ V_{DC}, \ \pm 5 \ V_{DC}, \ \pm 1 \ V_{DC}, \ 0 \sim 20 \ mA,$ 

Resolution

• Input Load Resistance  $100 \text{ M}\Omega \text{ } (0 \sim 5 \text{ V}_{DC}), 120 \Omega, (0 \sim 20 \text{ mA})$ 

Accuracy ±0.1% (Voltage) at 25 °C ±0.2% (Current) at 25 °C

Note: 2-year battery life based on condition of data transmission frequency with one time per hour

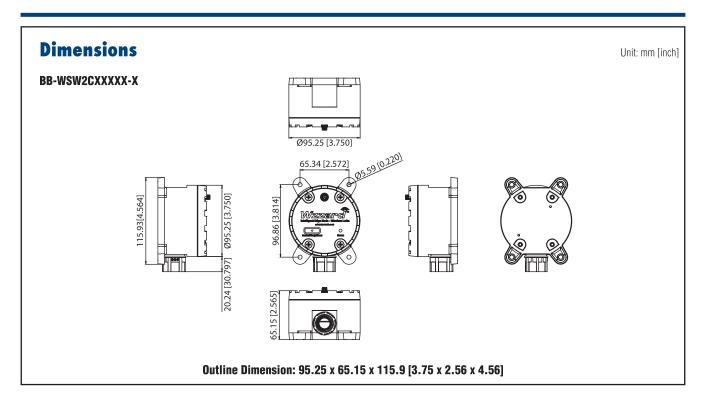

#### **Serial Communication**

Port Type RS-485
No. of Ports 1
Protocol Modbus RTU
Data Bits 8
Stop Bits 1, 2

Parity None, odd, even, space, mark
 Baud Rate 2400 ~ 115200 bps
 Serial Signals Data+, Data-

Protection
 Built-in 15-kV ESD protection for all signals

## **Console for Configuration**

Port Type Micro USB
No. of Ports 1
Data Bits 8
Stop Bits 1
Parity None
Baud Rate 115200 bps
Serial Signals TxD, RxD

## **Regulatory Approvals**

Shock IEC60068-2-27
 Free Fall IEC60068-2-32
 Vibration IEC60068-2-6

# **Ordering Information**

BB-WSW2C00015-1
 BB-WSW2C00015-2
 BB-WSW2C00015-3
 BB-WSW2C42100-1
 LORAWAN node w/RS485, external antenna (923MHz)
 LORAWAN node w/RS485, external antenna (923MHz)
 LORAWAN node with power monitoring, 4 x AI, 2 x DI, 1 x DO, conduit, external antenna (915 MHz)

**BB-WSW2C42100-2** LoRaWAN node with power monitoring, 4 x Al, 2 x Dl, 1 x D0, conduit, external antenna (868 MHz)

BB-WSW2C42100-3
 LoRaWAN node with power monitoring, 4 x Al, 2 x Dl,1 x D0, conduit, external antenna (923 MHz)