


# DB9 Male to DB9 Female, 6 ft.


Model 9PAMF6

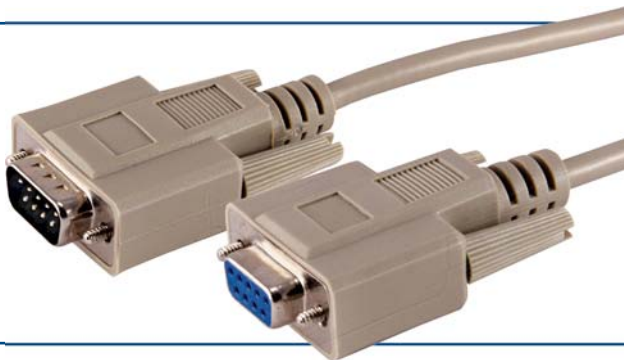

## PRODUCT FEATURES

- + Fully molded backshell with strain relief for added protection
- + 28 AWG stranded conductors for flexibility
- + Thumbscrews for tool-less termination

## MECHANICAL DIAGRAM

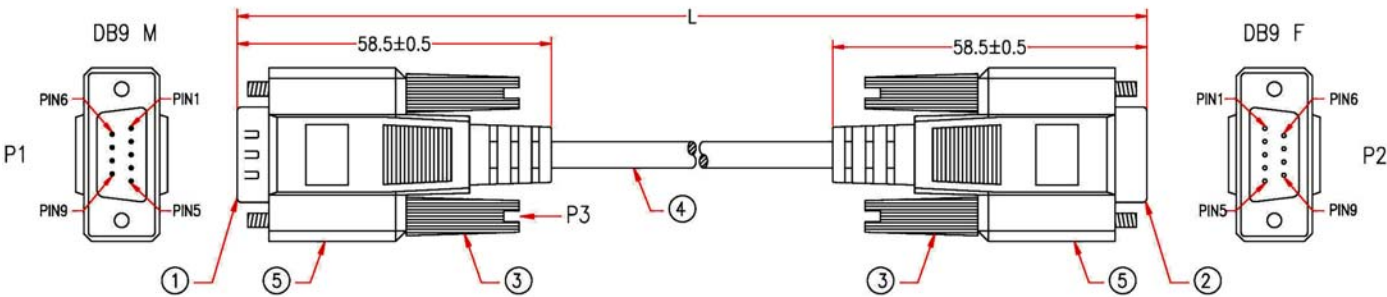

| P1     | 1006 | P2     |        |
|--------|------|--------|--------|
| 1      |      | 1      | BROWN  |
| 2      |      | 2      | RED    |
| 3      |      | 3      | ORANGE |
| 4      |      | 4      | YELLOW |
| 5      |      | 5      | GREEN  |
| 6      |      | 6      | BLUE   |
| 7      |      | 7      | PURPLE |
| 8      |      | 8      | GREY   |
| 9      |      | 9      | BLACK  |
| SHIELD |      | SHIELD |        |

\*NOTE: All relevant materials are complied with RoHS directive

|   |   |
|---|---|
| 5 | BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$  |
|   | ALUMINUM FOIL 33*65mm   |
|   | MOLDED PE COLOR TRANSPARENT   |
|   | MOLDED PVC BEIGE  |
| 4 | NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051 |
| 3 | MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE   |
| 2 | DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR  |
| 1 | DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR  |

All product specifications are subject to change without notice.  
9PAMF6\_4816ds