


# CB-134I Series

4-port RS-422/485 PC/104-Plus modules with 2 kV isolation

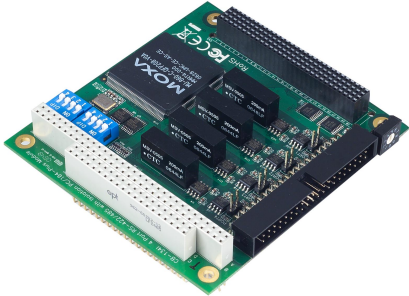

## Features and Benefits

- 921.6 kbps maximum baudrate for fast data transmission
- On-chip software flow control
- Serial interface is DIP switch selectable
- Onboard Tx and Rx LED indicators for each port
- Supports Windows XP/Vista/7, Windows CE 5.0/6.0, and Windows XP Embedded operating systems
- Wide-temperature model available for -40 to 85°C environments

## Certifications



## Introduction

The CB-134I PC/104-Plus modules come with 4 RS-422/485 ports, and can be used with PC/104-Plus CPU boards that accept the PC/104-Plus expansion interface. Optional DB9 and DB25 connection cables are available for connecting to serial devices, and versatile driver support makes the modules suitable for a wide range of applications. The CB-134I modules can be used on the PC/104-Plus (PCI) bus, and provide a reliable, high-performance solution for multiport serial communication.

## Specifications

### Serial Interface

Comm. Controller	16C550C or compatible x 4
Bus	PC/104 plus bus
Connector	40-pin box header
DIP Switches	Serial interface
Max. No. of Boards per PC	8
IRQ	Assigned by BIOS
I/O Address	Assigned by BIOS
FIFO	128 bytes
No. of Ports	4
Serial Standards	RS-422, RS-485
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, XON/XOFF

<b>Serial Signals</b>	
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
<b>Serial Software Features</b>	
Windows Drivers	DOS, Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2/2016/2019 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded
Linux Drivers	Linux kernel 2.4.x, Linux kernel 2.6.x, Linux kernel 3.x
UNIX Drivers	QNX 6, Solaris 10, UnixWare 7
<b>Power Parameters</b>	
Input Current	153 mA @ 5 VDC
Input Voltage	5 VDC
<b>Physical Characteristics</b>	
Dimensions	90 x 96 mm (3.54 x 3.78 in)
<b>LED Interface</b>	
LED Indicators	Built-in Tx, Rx LEDs for each port
<b>Environmental Limits</b>	
Operating Temperature	CB-134I: 0 to 55°C (32 to 131°F) CB-134I-T: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
<b>Standards and Certifications</b>	
EMC	EN 55032/24, EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3 IEC 60068-2-14
Vibration	IEC 60068-2-6
<b>Declaration</b>	
Green Product	RoHS, CRoHS, WEEE
<b>MTBF</b>	
Time	403,631 hrs
Standards	Telcordia (Bellcore), GB
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x CB-134I Series PC/104-Plus module
Documentation	1 x quick installation guide 1 x warranty card

## Ordering Information

Model Name	Serial Bus	Serial Standards	No. of Serial Ports	Serial Isolation Protection	Operating Temp.
CB-134I	PC/104-Plus	RS-422/485	4	2 kV	0 to 55°C
CB-134I-T	PC/104-Plus	RS-422/485	4	2 kV	-40 to 85°C

© Moxa Inc. All rights reserved. Updated Sep 16, 2021.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.