EKI-2428G-4FA

24GE+4G SFP Port L2 Unmanaged Switch with AC Input



Features

- 24 x Gigabit copper ports + 4 x Gigabit SFP ports
- SFP socket for easy and flexible fiber expansion
- Provides 8K MAC address
- 100~240 V_{AC} power input

Introduction

The EKI-2428G is an unmanaged switch with 24 Gigabit ports and 4 Gigabit SFP ports. It is designed for rack-mount installation, and suitable for edge to core industrial networks. The wire speed across all ports up to 56 Gbps for L2 traffic forwarding.


Protection

Specifications

Communications

oommunioutions		TIOLOGIUM	
StandardLAN	IEEE 802.3, 802.3u, 802.3x, 802.3ab, 802.3z 10/100/1000BASE-TX, optional 100BASE-FX,	Power Reverse	Present
- LAN	1000BASE-SX/LX/LHX/XD/ZX/EZX	 Overload Current 	Present
 Transmission Distance 	Ethernet: Up to 100 m (4- wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)	Environment	
	SFP: Up to 110 km (depends on SFP)	 Operating Temperature Storage Temperature 	-20 ~ 70°C (-4 ~ 158°F)
 Transmission Speed 	Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation Gigabit Fiber: Up to 1000 Mbps	 Operating Humidity Storage Humidity 	10 ~ 95% (non-condensing) 10 ~ 95% (non-condensing)
Interface		• MTBF	620,427 hours
 Connectors 	24 x RJ45 (Ethernet) 4 x SFP (mini-GBIC) ports	Certification	
 LED Indicators 	10/100T (X): Link/Activity, Duplex/Collision	= EMI = EMS	CE FCC Class A EN 61000-4-2
	Gigabit Copper: Link/Activity, Speed (1000 Mbps) SFP: Link/Activity	- 1113	EN 61000-4-3
 Debug Port 	RS-232 (RJ45)		EN 61000-4-4 EN 61000-4-5
Mechanism			EN 61000-4-6
 Enclosure 	Metal shell with solid mounting kits		EN 61000-4-8
 Dimensions (W x H x D) 442 x 44 x 211.1 mm (17.4" x 1.73" x 8.31")	 Shock 	IEC 60068-2-27
 Mounting 	1U 19" Rack mount	 Freefall 	IEC 60068-2-32
Power		 Vibration 	IEC 60068-2-6
 Power Consumption 	18W		
 Power Input 	100~240V single AC power input		

EKI-2428G-4FA

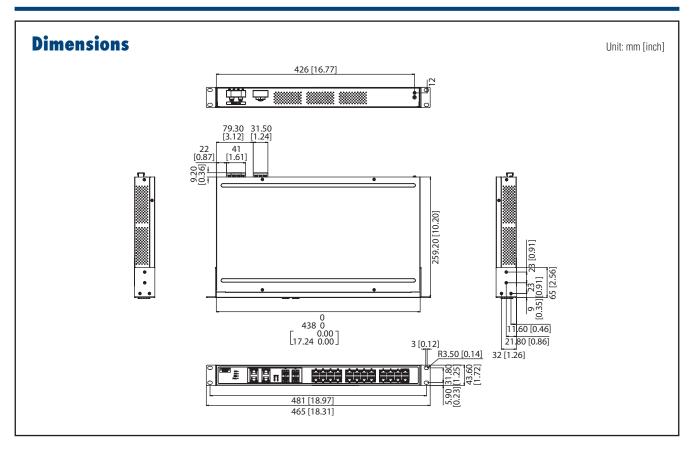

Ordering Information

• EKI-2428G-4FA-AE 24GE+4G SFP Port Unmanaged Ethernet Switch