

Durable Series

For data centers and mission critical systems

DS1000B-RM/ DS1500B-RM/ DS2000B-RM/ DS3000B-RM

- * Zero transfer time (online)
- * Smart fan speed control
- * Saves more power and minimizes noise
- * 4 hours recharge time
- * Cold start (DC power on)
- * EPO port ready: emergency power off switch
- * SNMP card slot available
- * Hot swappable / replaceable battery: continuous operation even when battery is being replaced
- * Extended battery pack (optional)
- * RS232 and USB port
- * Full version of OPTI-SAFE software



* DS1000B-RM

Specifications

Model Name	DS1000B-RM	DS1500B-RM	DS2000B-RM	DS3000B-RM
Topology	True On-Line, Double Conversion			
On-battery Output Waveform	Sine Wave			
Maximum Capacity	1000VA / 700W	1500VA / 1050W	2000VA / 1400W	3000VA / 2100W
INPUT				
Maximum Capacity	Single Phase (2W+G)			
Nominal Input Voltage	100/110/120Vac or 220/230/240Vac			
Input Voltage Regulation	80-144Vac(100/110/120Vac) or 160-276Vac(220/230/240Vac)			
Nominal Input Frequency	50Hz / 60Hz Auto Sensing			
Input PFC	> 0.97@Full load			
Input Short Protection	Circuit Breaker			
OUTPUT				
Nominal Output Voltage	100/110/120/127Vac or 220/230/240Vac (selectable)			
Output Voltage Regulation	Rated Voltage +/-2%			
Output T.H.D	< 3% T.H.D at Linear Load			
High Efficiency Mode (AC to AC)	92%			
Crest Factor	3 : 1			
Start on Battery	Yes			
Auto Restart	Yes			
Number of Outlets	6 Battery backup (US) 4 Battery backup (IEC)		4 Battery backup (US) 5 Battery backup (IEC320 10A*4, IEC320 16A*1)	
PROTECTION				
Data Line Surge Protection	RJ11 / RJ45			
Surge Energy Rating	125J(100/110/120Vac) ; 280J(220/230/240Vac)			
Overload Protection	125% Load for 1 minutes 150% of 10 seconds(on line, 130% Load for 10 seconds >130%			
Short Circuit Protection	UPS output cut off immediately			
BATTERY				
User Replaceable Battery	DC36V / 12V 7.2Ah x 3	DC36V / 12V 34W x 3	DC72V / 12V 7.2Ah x 6	DC72V / 12V 34W x 6
Typical Backup Time (Full / Half load)*	6 / 18 min	5 / 15 min	6 / 18 min	5 / 15 min
Recharge Time to 90% (Typical)	< 4 Hours			
Extended Battery Pack (Optional)**	BP1000-RM 12V 7.2Ah x 6	BP1500-RM 12V 34W x 6	BP2000-RM 12V 7.2Ah x 12	BP3000-RM 12V 34W x 12
ADVANCED WARNINGS / DIAGNOSTICS				
Front Panel LEDs	AC mode / On line / On battery / Bypass / Fault / Overload and 15 UPS Parameters			
Audible Alarms	Battery mode / UPS faults / Overload			
COMMUNICATION INTERFACE				
Communication Port	RS232 and USB#			
SNMP Manageable	Yes			
ENVIRONMENTAL				
Operation Temperature	0~40°C / 32~104°F			
Storage Temperature	-20~60°C / -4~140°F			
Relative Humidity	0~95% humidity, non-condensing			
Audible Noise	< 40 dBA (at 1 meter from surface of unit)			
PHYSICAL				
Dimensions (Physical / Packing)	(in) 16.9x16.7x3.3 / 21.7x21.5x8.1	(in) 16.9x16.7x3.3 / 21.5x21.7x8.1	(in) 25x16.9x3.3 / 29.5x21.7x8.7	(in) 25x16.9x3.3 / 29.5x21.7x8.7
(LxWxH)	(mm) 428x425x84 / 552x546x206	(mm) 425x428x84 / 546x552x206	(mm) 635x428x84 / 750x550x220	(mm) 635x428x84 / 750x550x220
Weight (Net / Gross)	(lbs) 40.1 / 47.4	(lbs) 40.6 / 47.8	(lbs) 69.7 / 74.5	(lbs) 71.6 / 78.7
	(kg) 18.2 / 21.5	(kg) 18.4 / 21.7	(kg) 31.6 / 33.8	(kg) 32.5 / 35.7
Battery Pack Dimensions	(in) 16.7x16.9x3.3 / 21.5x21.7x8.1	(in) 16.7x16.9x3.3 / 21.5x21.7x8.1	(in) 25x16.9x3.3 / 29.5x21.7x8.7	(in) 25x16.9x3.3 / 29.5x21.7x8.7
(LxWxH)	(mm) 425x428x84 / 546x552x206	(mm) 425x428x84 / 546x552x206	(mm) 635x428x84 / 750x550x220	(mm) 635x428x84 / 750x550x220
Battery Pack (Net / Gross)	(lbs) 48.7 / 53.1	(lbs) 48.7 / 53.1	(lbs) 94 / 101.7	(lbs) 94 / 101.7
	(kg) 22 / 24	(kg) 22 / 24	(kg) 42.5 / 46	(kg) 42.5 / 46
CONFORMANCE				
Approvals	UL / cUL(1X0V) ; CE , A-Tick , C-Tick , GOST-R(2X0V)			

Specifications are subject to change without notices.

* Typical backup time depends on power consumption of equipment attached and on UPS battery capacity. Values here are for reference only.

** The external battery pack is optional. Battery pack needs to be connected to UPS before connecting any load and turning on the UPS.

The model with optional USB port provides both RS232 and USB connectivity, but only one connectivity can be used at the same time.



Durable Series

For data centers and mission critical systems

DS1000B-RM/ DS1500B-RM/ DS2000B-RM/ DS3000B-RM

Front Panel


DSB-RM




- 1 Func
- 2 Enter
- 3 On/ Off

Rear Panel

DS1000B-RM/ DS1500B-RM

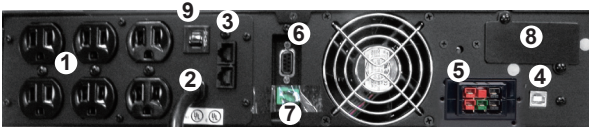

100V / 110V / 120V

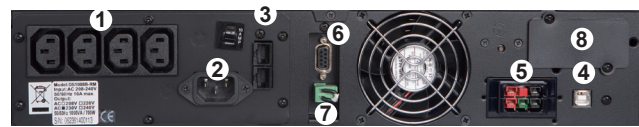

220V / 230V / 240V

DS2000B-RM



100V / 110V / 120V



220V / 230V / 240V

DS3000B-RM



100V / 110V / 120V



220V / 230V / 240V

- 1 Battery Backup Outlets
- 2 Input
- 3 Data Line Protection
- 4 USB
- 5 Extended Battery Connector
- 6 RS232
- 7 EPO
- 8 Smart Slot
- 9 Circuit Breaker
- 10 Input Circuit Breaker
- 11 Output Circuit Breaker