

EKI-9510E-2GM**PH** EKI-9510E-2GM**PL**

EN50155 10-Port Managed PoE M12 Ethernet Switch 72/96/110 V_{DC}
EN50155 10-Port Managed PoE M12 Ethernet Switch 24/48 V_{DC}



Features

- Complies with EN50155
- 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input
EKI-9510E-2GM**PH**: 72/96/110 V_{DC}
EKI-9510E-2GM**PL**: 24/48 V_{DC}
- Operating Voltage
EKI-9510E-2GM**PH**: 50.4~137.5 V_{DC}
EKI-9510E-2GM**PL**: 16.8~60 V_{DC}
- X-Ring Pro supports rapid and predictable convergence
- 8-port PoE support IEEE802.3 at/af
- M12 connector with IP40 protection

CE FCC

Introduction

The EKI-9500 series switch is designed for railway application with rugged and high EMC performance, being suitable for networking solution for rolling stock and wayside applications. The EKI-9500 series provides M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, and thus to guarantee reliable operation against environmental disturbances such as vibration and shock on train.

The EKI-9510E-2GMH & EKI-9510E-2GML are managed Ethernet switches that provide 8 x Fast Ethernet M12 D-coded ports. Each of them also provides 2 x Gigabit Ethernet M12 X-coded ports with Bypass function to increase the reliability of the network. EKI-9510E-2GMH/ ML features a "flat" design which can be easily deployed with its slender size and make network deployment easier in crowded carriage/ cabinet.

Specifications

Interface

- **I/O Port** 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- **Console port** M12 A-Coded
- **Power Connector** M12 A-Coded

Physical

- **Enclosure** Aluminum Shell
- **Protection Class** IP 40
- **Installation** Wall Mount
- **Dimensions (W x D x H)** 216 x 132 x 59.3 mm
- **Weight** 1.5kg

LED Display

- **System LEDs** PWR1, PWR2, SYS, R.M., Alarm
- **Port LED** Data, PoE

Environment

- **Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 10~ 95% (non-condensing)

Power


- **Power Consumption** 10 Watts
- **PoE Power Budget** EKI-9510E-2GM**PH**: 120 Watts
EKI-9510E-2GM**PL**: 60 Watts
- **Power Input** EKI-9510E-2GM**PH**: 72/96/110 V_{DC}
EKI-9510E-2GM**PL**: 24/48 V_{DC}
- **Operating Voltage** EKI-9510E-2GM**PH**: 50.4~137.5 V_{DC}
EKI-9510E-2GM**PL**: 16.8~60 V_{DC}
Dual inputs Supports Overload Current Protection
Supports Reverse Polarity Protection

Certification

- **EMI** FCC Part 15 Subpart B Class A
CE EN55032 (CISPR)
EN55024 Class A
- **EMS** EN61000-4-2 (ESD); EN61000-4-3 (RS);
EN61000-4-4 (EFT); EN61000-4-5 (Surge);
EN61000-4-6 (CS)
- **Shock** IEC 61373
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 61373
- **Certificate** EN50155; EN50121-3-2

Dimensions

Unit: mm [inch]

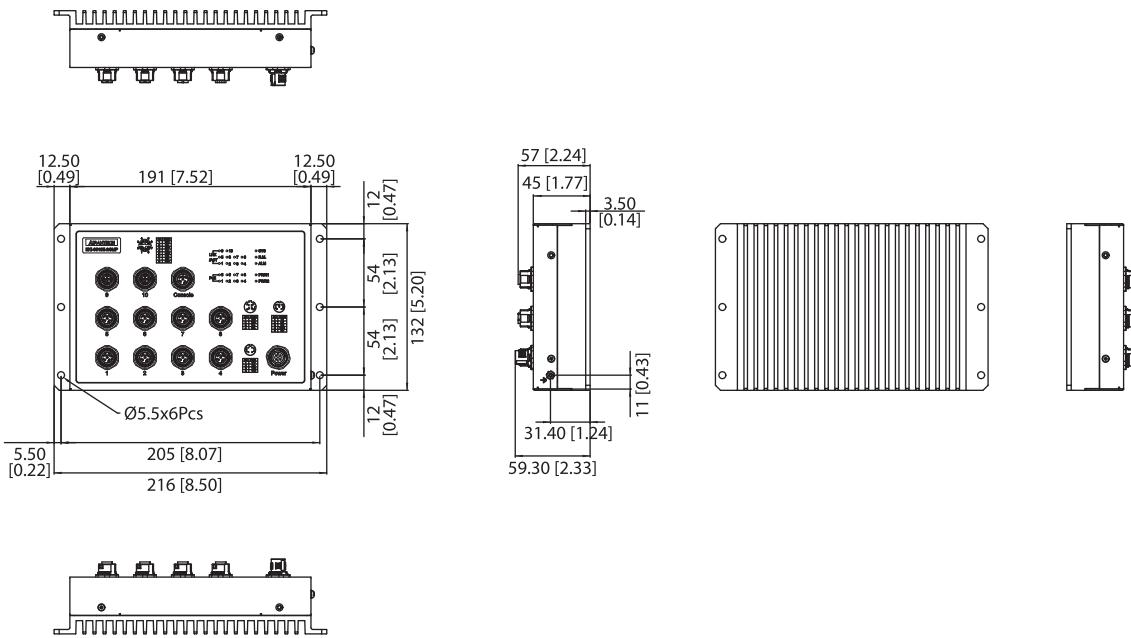

L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9KB
- **VLAN Group** 256 (VLAN ID 1-4093)
- **VLAN** 802.1Q VLAN, GVRP
- **Port Mirroring** Per port, Multi-source port
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy Protocol** IEEE802.1D-STP, IEEE802.1s-MSTP, IEEE802.1w-RSTP, X-Ring Pro

QoS

- **Priority Queue** Scheduling WRR (Weighted Round Robin), SP (Strict Priority)
- **Class of Service** IEEE802.1p based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Egress Rate limit
- **Link Aggregation** IEEE802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based, MAC-Based), RADIUS, TACACS+
- **Advanced Security** IP Source Guard

Management

- **DHCP** Client, Server, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP server/client

Ordering Information

- **EKI-9510E-2GMPH-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 72/96/110V_{DC} dual power input
- **EKI-9510E-2GMPL-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 24/48V_{DC} dual power input