


PIO-D96U/PIO-D96SU

Universal PCI, 96-channel Digital I/O Board

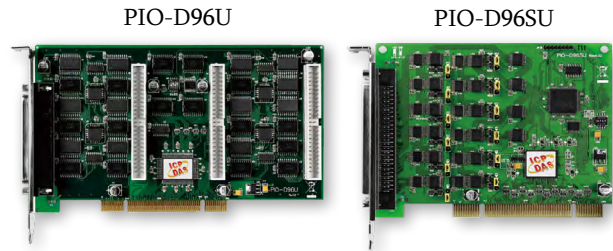

Features

- Universal PCI (3.3 V/5 V) Interface, Plug & Play
- 96-channel Digital I/O
- Twelve 8-bit Bi-directional Programmable I/O Ports
- All I/O Lines Buffered on the Board
- 4-channel Interrupt Source
- Buffer Output for Higher Driving Capability
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- DI/O Response Time: ~0.77 μs (1.3 MHz Max.)

Introduction

The PIO-D96U/D96SU card is designed as a direct replacement for the PIO-D96, without requiring any modification to the software or the driver.

The PIO-D96U provides four connectors for I/O wiring, while the PIO-D96SU provides a single high-density connector that reduces the amount of installation space required for the card in the computer.

The PIO-D96U/D96SU Universal PCI card supports the 3.3 V/5 V PCI bus, and provides 96 TTL Digital I/O lines that consist of twelve 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs on power-up or after a reset.

The PIO-D96U/D96SU card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

Hardware Specifications

Models	PIO-D96U	PIO-D96SU
Programmable DIO		
Channels	96	
Digital Input		
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max. ; Logic 1: 2.0 V Min.	
Response Speed	1.2 MHz (Typical)	
Digital Output		
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V	
Response Speed	1.2 MHz (Typical)	
General		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 50-pin Box Header x 3	Female SCSI II 100-pin x 1
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

Ordering Information

PIO-D96U CR	Universal PCI, 96-channel Digital I/O Board (RoHS).
PIO-D96SU CR	Universal PCI, 96-channel Digital I/O Board (SCSI II Connector, RoHS)

Software

Drivers

- 32/64-bit Windows XP/2003/2008/Vista/7/8
- Linux DASyLab

Sample Programs

- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo
- VB.NET/C#.NET/VC.NET Demo

Pin Assignments

PIO-D96U

Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20 +5V
N.C.	02	21 GND
PB_7	03	22 PC_7
PB_6	04	23 PC_6
PB_5	05	24 PC_5
PB_4	06	25 PC_4
PB_3	07	26 PC_3
PB_2	08	27 PC_2
PB_1	09	28 PC_1
PB_0	10	29 PC_0
GND	11	30 PA_7
N.C.	12	31 PA_6
GND	13	32 PA_5
N.C.	14	33 PA_4
GND	15	34 PA_3
N.C.	16	35 PA_2
GND	17	36 PA_1
+5 V	18	37 PA_0
GND	19	

Pin Assignment	Terminal No.	Pin Assignment
PC_7	01	02 GND
PC_6	03	04 GND
PC_5	05	06 GND
PC_4	07	08 GND
PC_3	09	10 GND
PC_2	11	12 GND
PC_1	13	14 GND
PC_0	15	16 GND
PB_7	17	18 GND
PB_6	19	20 GND
PB_5	21	22 GND
PB_4	23	24 GND
PB_3	25	26 GND
PB_2	27	28 GND
PB_1	29	30 GND
PB_0	31	32 GND
PA_7	33	34 GND
PA_6	35	36 GND
PA_5	37	38 GND
PA_4	39	40 GND
PA_3	41	42 GND
PA_2	43	44 GND
PA_1	45	46 GND
PA_0	47	48 GND
+5 V	49	50 GND

PIO-D96SU

Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51 PA_10
PA_01	02	52 PA_11
PA_02	03	53 PA_12
PA_03	04	54 PA_13
PA_04	05	55 PA_14
PA_05	06	56 PA_15
PA_06	07	57 PA_16
PA_07	08	58 PA_17
PB_00	09	59 PB_10
PB_01	10	60 PB_11
PB_02	11	61 PB_12
PB_03	12	62 PB_13
PB_04	13	63 PB_14
PB_05	14	64 PB_15
PB_06	15	65 PB_16
PB_07	16	66 PB_17
PC_00	17	67 PC_10
PC_01	18	68 PC_11
PC_02	19	69 PC_12
PC_03	20	70 PC_13
PC_04	21	71 PC_14
PC_05	22	72 PC_15
PC_06	23	73 PC_16
PC_07	24	74 PC_17
GND	25	75 GND
PA_20	26	76 PA_30
PA_21	27	77 PA_31
PA_22	28	78 PA_32
PA_23	29	79 PA_33
PA_24	30	80 PA_34
PA_25	31	81 PA_35
PA_26	32	82 PA_36
PA_27	33	83 PA_37
PB_20	34	84 PB_30
PB_21	35	85 PB_31
PB_22	36	86 PB_32
PB_23	37	87 PB_33
PB_24	38	88 PB_34
PB_25	39	89 PB_35
PB_26	40	90 PB_36
PB_27	41	91 PB_37
PC_20	42	92 PC_30
PC_21	43	93 PC_31
PC_22	44	94 PC_32
PC_23	45	95 PC_33
PC_24	46	96 PC_36
PC_25	47	97 PC_37
PC_26	48	98 PC_38
PC_27	49	99 PC_39
+ 5 V	50	100 + 5 V

3
5

PCI Bus Data Acquisition Boards