

# SmartNode™ BRI/FXS/FXO VoIP Gateway

## Model 4150



2 BRI/2 FXS-FXO or 4 BRI/4 FXS-FXO and 4–16 simultaneous G.722/G.711 or T.38 calls. The SN4150 is the best way to connect ISDN networks or ISDN terminal equipment, and legacy analog equipment into a UCC environment. With built-in security features such as HTTPS provisioning, Stateful firewall and optional SIP-TLS / SRTP\*\* it provides business-class VoIP for demanding ISDN users.

### BRI, FXS & FXO interfaces

- 2 or 4 ISDN BRI S0/T0 and 2 or 4 FXS-FXO ports.
- 4–16 G.722/G.711 or 4–16 T.38 calls simultaneously.
- Optional SIP TLS/SRTP.

### Advanced Local Call Switching

Virtual interfaces and routing tables provide industry leading flexibility in call handling programming. Local call switching, soft fall-back to alternative routes. Simultaneously connects to multiple SIP services/IP PBXs.

### Network Monitoring

Embedded PacketSmart Agent for network monitoring and assessment 24x7.\*\*

### Auto-Provisioning

Secure zero-touch provisioning (HTTPS) for ease of use.

### Proprietary OS

Utilizes proprietary Trinity™ software for enhanced security.

### Full VoIP protocol support

SIPv2, SIPv2 over TLS\*\*, ISDN, QSIG\*\*, T.38, DSS1, G.722 HD voice, RTP security with SRTP, fax and modem bypass, DTMF relay.

### Outstanding Interoperability

Interoperable for voice and T.38 fax with leading SIP service providers, softswitch vendors, and major IP PBX manufacturers.

### Optional eSBC upgrade for BRI/FXS/FXO Gateways with 2 Ethernet Ports

Models containing "/2ETH" can be converted into high performance enterprise session border controllers (eSBC) simply by purchasing a software license. This capability prepares your voice network for next-generation SIP services and security.

For details about the upgraded eSBC's capabilities, refer to the model SN5550 eSBC specifications.

The SN4150 series is the perfect choice for All-IP applications where legacy, non-replaceable telephones have to be integrated into a UCC environment (or for good old fax devices to be migrated to the next-generation network infrastructure).


The combo configuration of 2 BRI and 2 FXS-FXO or 4 BRI and 4 FXS-FXO fits the requirements of small and medium-sized enterprises requiring a solution to enable legacy equipment for VoIP networks.

Patton's SmartNode 4150 series deliver the legacy phone interfaces, service transparency, and flexible integration required for All-IP networks.

Contact us at [sales@patton.com](mailto:sales@patton.com) for more information.

## Applications

In All-IP networks as well as during the migration to the next generation communication network, legacy telephone equipment will remain for quite some years. The SmartNode SN4150 series will be responsible for maintaining the ISDN and analog interfaces when the telephony service is switching to an All-IP (VoIP) service. With its ability to convert modem and fax signals to VoIP, it solves problems integrating PoS, metering systems, elevator phones, etc. to an All-IP environment.

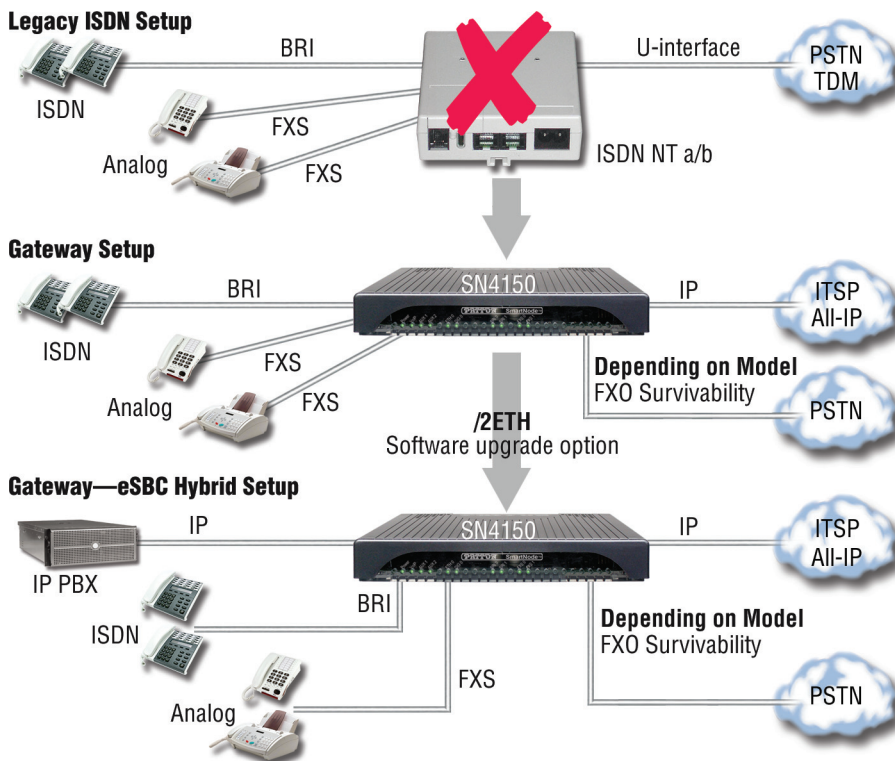

# SmartNode™ 4150 Multi-port BRI/FXS/FXO VoIP Gateway series



SN4151/4BIS4JS8VHP/EUI



SN4151/2BIS2JS4VHP/EUI

## Specifications

### Call Capacity

4 up to 16 simultaneous  
G.722/G.711 or T.38 fax calls

### Voice Signaling

- SIPv2 and SIPv2 over TLS\*\* & SIP over IPv6
- SIP call transfer, redirect
- Overlap or en-bloc dialing
- DTMF in-band, out-of-band

### Call Routing & Services

- Regular expression number matching
- Regular expression number manipulation
- Least Cost Routing
- Number blocking
- Short-Dialing
- Digit collection
- Distribution-Groups and Hunt-Groups

### FXS Connectivity

- 2-wire Loopstart on RJ-11/12
- 2 or 4 FXS ports
- Long Reach FXS—10 km @ 3REN load
- EuroPOTS (ETSI EG201188)
- Programmable AC impedance, feeding, ring and on-hook voltage
- Caller-ID FSK and ITU V.23/Bell 202 generation

### FXO Connectivity

- 2-wire Loopstart—RJ11/12
- 2 or 4 FXO ports
- Programmable impedance
- Ring detection, tone detection
- Caller ID detection (FXS, DTMF)

- Disconnect supervision

### ISDN

- 2 or 4 BRI S0/T0 ports, RJ-45
- NT/TE configurable per port
- Built-in line power on each port (total 4W)
- DSS1, Q.921, Q.931. NTT-64
- HP High Precision Clock Stratum 3 CO
- Point-point and point-multi-point
- Lifeline Bypass Relay
- Optional QSIG support\*\*

### Voice Processing

- G.722
- G.711m/A-law
- G.723.1 (6.4 kbps)
- G.729, 729a, 729ab (8 kbps)
- G.726 (16, 24, 32, 40 Kbps)
- G.168-2004 echo cancellation (128 ms)
- 4–16 simultaneous low-bandwidth voice or T.38 fax calls
- 4–16 HD calls with SRTP
- Up to 200 SIP to SIP calls\*\*\*
- 2–8 transcoded calls\*\*
- Transparent ISDN data (RFC 4040)
- Silence suppression and comfort noise
- Adaptive and configurable dejitter buffer
- Configurable RTP packet length

### Quality of Service

- PacketSmart™ Network Assessment & Monitoring\*\*

- Voice priority, DownStreamQoS™
- Traffic Management, shaping policing
- IEEE 802.1p, IEEE 802.1Q, 4096 VLANs (Tag insertion/deletion), TOS, DiffServ Labeling

### Connectivity

- One or two 10/100/1000Base-T Ethernet ports
- Auto-MDIX
- DHCP Client
- PPPoE Client (multi-session)
- IP Multi-Netting, VLAN, Secondary IP
- Dual Stack IPv4 & IPv6
- ICMP
- Dynamic and static NAT and NAPT
- ACL, Stateful Firewall
- DNS, DynDNS
- DHCP Server
- SNTP Client

### Management

- Web/HTTPs, CLI & SSH Telnet access
- WebWizard support
- Patton Cloud Management
- TR-069, TFTP, HTTP, HTTPS configuration & firmware up- and download
- TR-069 configuration and firmware provisioning
- SNMPv3 agent
- Separate config domain
- MIB II and private MIB
- Built-in diagnostic tools

- Secure Auto-Provisioning with built in root CA

### Power Consumption

< 10W

### Packaging

Desktop/Wall-mount plastic chassis.

Metal: Rack mount option

### Dimensions

**Plastic chassis 2BIS/2FXS:**  
8.2W x 1.3H x 6.5D in.  
(20.8W x 3.4H x 16.5D cm)

**Metal enclosure 4BIS/4FXS**

**2BRI/2FXS/2FXO**  
**4BRI/4FXS/4FXO**

11W x 1.5H x 6.1D in.  
(28 W x 3.9 H x 15.7 D cm)  
Rack mount options available:  
See *Accessories* on product page online

### Weight

<450g (15.9 oz) / <600g (metal)

### Environment

- Operating temperature: 32–104°F (0–40°C)
- Operating humidity: up to 90%, non-condensing

### Compliance

- FCC Part 15 Class A (US EMC)
- CE per RTTE 99/5/EC (EMC and LVD)

### Safety

- EN60950
- TBR-3 (ISDN BRI/So)

Specifications subject to change without notice.



**Patton Electronics Co.**  
7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879, USA  
Phone +1 301 975 1000  
Fax +1 301 869 9293  
E-mail [sales@patton.com](mailto:sales@patton.com)  
Web [www.patton.com](http://www.patton.com)

**Patton-Inalp Networks AG**  
Meriedweg 7  
CH-3172 Niederwangen, Switzerland  
Phone +41 (31) 985 25 25  
Fax +41 (31) 985 25 26  
E-mail [we@patton.com](mailto:we@patton.com)  
Web [www.patton.com](http://www.patton.com)

**Patton Hungary Zrt**  
Gábor Dénes utca 4., Infopark Building C  
Budapest H-1117, Hungary  
Phone +36 1 439 4840  
Fax +36 1 439 4844  
E-mail [ce@patton.com](mailto:ce@patton.com)  
Web [www.patton.com](http://www.patton.com)

07MSN4151-DS6

Patton is a registered trademark, and is a trademark of Patton Electronics Company in the United States and other countries.

\* Depending on model.

\*\* Licensed Feature at additional charge.

\*\*\* Supports up to 200 SIP-to-SIP sessions under ideal conditions. Transcoding, debugging, and/or IP routing reduce processing capacity.