

High Rate Valve Regulated SLA Battery

Features

- Sealed and Maintenance Free
- Safety Valve for Ultimate Safety; Prevents Overpressure
- Exceptional Deep Discharge Recovery Performance
- Low Self Discharge Characteristics
- Highly Resistant to Vibration and Shock

Applications

- Remote Equipment Power
- Surveillance Cameras
- Wireless Base Stations
- Medical Equipment
- Remote Sensors
- Backup Power Systems



TPBAT12-52
12V 52Ah SLA AGM Battery


Description

The TPBAT12-52 high rate valve regulated sealed lead acid (VRLA) AGM battery has been developed for long term operation in harsh environments. They have a high cycle life and impressive 8 year float life. They are designed to operate over a wide temperature range such as those experienced in outdoor equipment applications. The batteries can be installed in any position without affecting their performance or reliability. The batteries have a carrying/lifting handle for convenience.


Specifications

TPBAT12-52	
Voltage	12V
Capacity (amp hours; 20hr)	52
Typical Float Life	8 Years
30% Discharge Cycle Life	1800 Cycles
Type / Technology	Valve Regulated Sealed Lead Acid / Absorbent Glass Mat (AGM)
Self Discharge (25°C)	<3% per month
Charge Voltage (-30mV / °C)	14.4 to 15V ; Max Current 15.6A
Float Voltage (-20mV / °C)	13.5 to 13.8V
Internal Resistance	5.5mΩ
Operating Temperature	-30C (-22F) to +60C (140F)
Housing	ABS (UL94HB)
Dimensions (L x W x H)	248 x 138.4 x 219 (9.8 x 5.4 x 8.6")
Weight	18.3kg (40.3lb)
Warranty	2 Years


Cycle Service Life

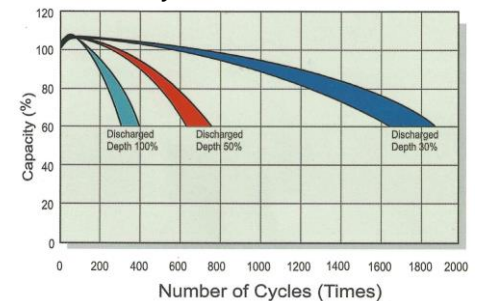


Capacity vs Storage Time

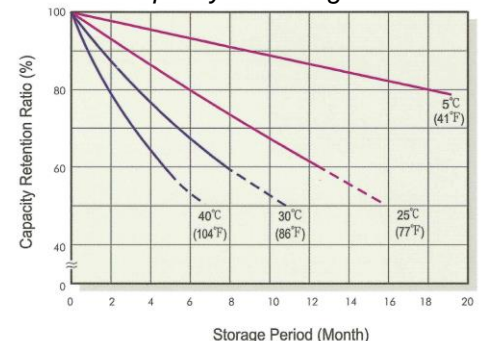


Float Service Life

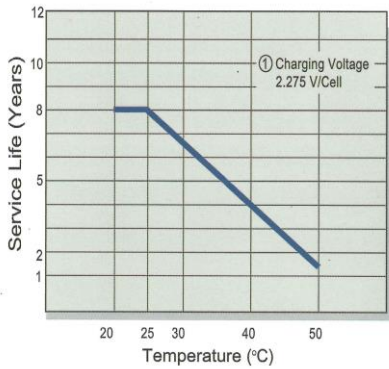


Cycle Charge

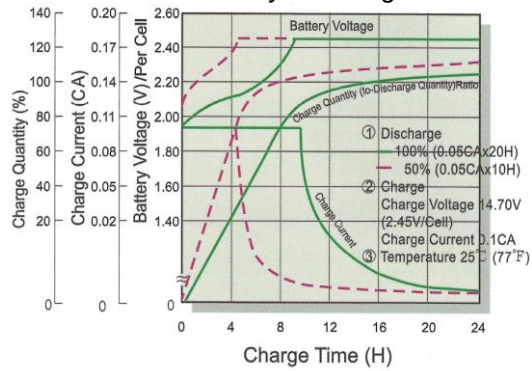


Voltage vs Discharge Time

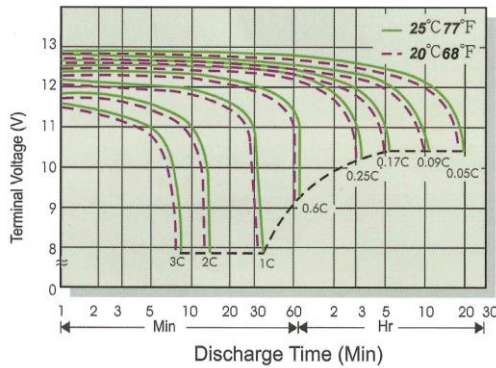


Float Charge

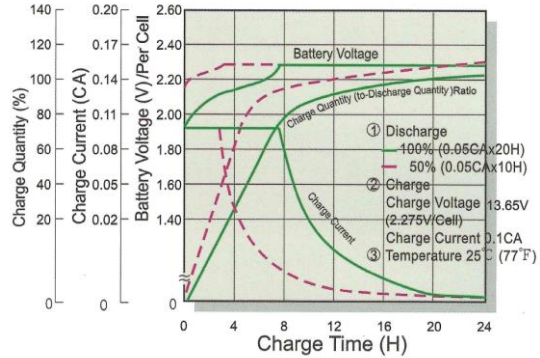

Battery Layout

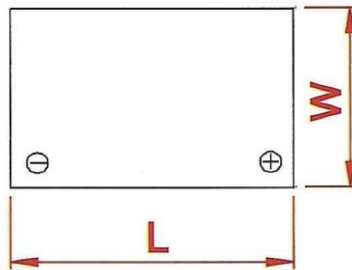

TAB Dimensions
Max Torque 110 in-lb

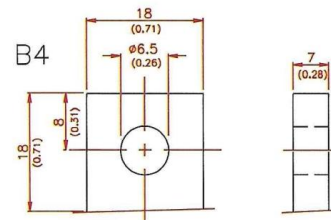

[M6 bolt & nut]

System Ordering:

TPBAT12-52 12V 52Ah Valve Regulated Sealed Lead Acid AGM Battery

For further information contact:

Tyconpower.com



14641 S 800 W Suite A
Bluffdale, UT 84065
PH: 801-432-0003
FAX: 801-618-4220