

SMI-1110 Managed Media and Rate Converters

 perle.com/products/10-100-1000-managed-media-converters.shtml

10/100/1000Base-T to 1000Base-X Conversion

- 10/100/1000Base-T to 1000Base-X Fiber Media Converters
- Connect 10/100 devices to Gigabit backbone
- Extend network distances up to 160km
- Manage via SNMP, CLI - Telnet/SSH, Internet Browser, or PerleVIEW Centralized Management Package
- Advanced media converter features - Smart Link Pass-Through, Fiber Fault Alert, Auto-MDIX and Loopback



Perle's advanced line of **Managed Gigabit Rate Converting Media Converters**, provides transparent and reliable **10/100/1000 ethernet to fiber connections**. While providing an economical means of extending your existing copper based network connection, these media converters are SNMP manageable to enable complete control and status viewing of your fiber links.

Perle 10/100/1000 Managed Media Converters come standard with extensive cost and time saving features. In addition, a lifetime warranty and free worldwide technical support make Perle's Managed 10/100/1000 Ethernet Converters the smart choice for IT professionals.

SMI-1110 Managed Gigabit Rate Converting Media Converter Features

- | | |
|----------------------------|---|
| QOS (Quality of Service) | <ul style="list-style-type: none">• Bandwidth Allocation via rate limiting• IEEE 802.1P tagged frame priority control• IEEE 802.1P priority tag remapping• IP TOS (Type of Service) priority for IPV4 Diffserv or IPV6 traffic class frames• Congestion Service Policy through WQF (Weighted Fair Queuing) or Strict Priority Queuing (default) |
|----------------------------|---|
-

VLAN Tagging	<ul style="list-style-type: none"> • Default – Transparent to VLAN frames • Enable discarding of tagged frames • Enable discarding of untagged frames • Untag – Removes any existing tag • Insert Tag – Insert (if original frame is untagged) or replace (if original frame is tagged) the VLAN ID and priority with the configured default VLAN ID and priority tag. • Insert Double tag (Q in Q) – Append an additional tag using the configured default VLAN ID and priority.
Unknown Multicast Frame filtering	When enabled, Multicast frames with an unknown destination address are not allowed to egress the port
Unknown Unicast Frame filtering	When enabled, Unicast frames with an unknown destination address are not allowed to egress the port
Unidirectional Ethernet	When enabled, provides the ability to restrict port to one-way traffic flow. Used in applications such as unidirectional video broadcasting as well as providing security for ethernet connections in accessible public areas.
Configuration Mode selection	Select whether to use the on-board DIP switches or the management software for mode selection
Auto-MDIX	Can manually set Auto or MDIX on the copper port via on-board strap or via the management software. Auto-MDIX (automatic medium-dependant interface crossover) detects the signaling on the copper ethernet interface to determine the type of cable connected (straight-through or crossover) and automatically configures the connection when enabled. The media converter can also correct for wires swapped within a pair. The media converter will adjust for up to 120ns of delay skew between the 1000Base-T pairs.
Converter Information	<ul style="list-style-type: none"> • User configurable media converter name • User configurable fiber port name • User configurable copper port name • Copper Downshift status • Hardware revision number • Firmware version number
DIP switch settings	View hardware DIP switch settings

Selectable Max Packet Size	Set max packet size to 1522 / 2048 or 10,240 (default)
10BaseT Extended Distance	Normal/extended – default Normal. By configuring as “extended”, the 10baseT receiver sensitivity is increased providing the possibility of a 10BaseT connection greater than 100m.
Auto Copper downshift	Automatically detects a 2-pair cable environment and downshifts operation of the link to 100 Mb/s. Configure the number of times (0-8) that the PHY will attempt to establish a successful Gigabit link before attempting to “downshift” as an auto-negotiating 10/100 device. Setting # of attempts to 0 (default) disables the feature.
Virtual Cable Test	A test that enables the detection of potential copper cabling issues such as pair polarity pair swaps and excessive pair skew as well as any opens, shorts or any impedance mismatch. Will report the distance in the cable to the open or short.
Port Control	Enable or disable individual fiber or copper port on the converter
Copper Port Status	<ul style="list-style-type: none"> • Port Enabled (Yes/No) • Link Status (Up/Down) • Auto Negotiation Settings (Disabled, Complete or In Progress) • Resolved as crossover MDI or MDIX type
Fiber Port Status	<ul style="list-style-type: none"> • Port Enabled (Yes/No) • Connector type (SC, LC, ST) • Link Status (Up/Down) • Far End Fault (OK, Failed) • Fiber Loopback mode (On/Off)
Control	<ul style="list-style-type: none"> • Reset • Reset to factory default • Reset Statistical counters • Phy specific commands such write/read config, read dip switches • Update firmware • Fiber Loopback mode. (On/Off) • Virtual Cable Test. (On/Off) • Upload/download configuration
Detailed port statistics	To assist in troubleshooting copper and fiber links, an extensive list of ingress and egress counters for both copper and fiber ports are available. These statistics can be viewed locally via the management module or from a central SNMP NMS on the network

Auto-Negotiation (802.3u)	<p>The media converter supports auto negotiation. The 1000Base-X fiber interface negotiates according to 802.3 clause 37. The 10/100/1000Base-T negotiates according to 802.3 clause 28 and 40. The 1000Base-X will link up with its partner after the highest common denominator (HCD) is reached and the copper has linked up with its partner. The 1000Base-X will continue to cycle through negotiation transmitting a remote fault of offline (provided this is enabled through the switch setting) until the copper is linked up and the HCDs match.</p> <p>The media converter supports auto-negotiation of full duplex, half duplex, remote fault, full duplex pause, asymmetric pause and Auto MDI-X.</p>
Smart Link Pass-Through	When the Link Mode switch is placed into Smart Link Pass-Through mode, the copper ethernet port will reflect the state of the 1000Base-X media converter port. This feature can be used whether fiber auto-negotiation is enabled or disabled.
Fiber Fault Alert	With Fiber Fault Alert the state of the 1000Base-X receiver is passed to the 1000Base-X transmitter. This provides fault notification to the partner device attached to the 1000Base-X interface of the media converter. If the 1000Base-X transmitter is off as a result of this fault it will be turned on periodically to allow the condition to clear should the partner device on the 1000Base-X be using a similar technique. This eliminates the possibility of lockouts that occur with some media converters. Applies only when fiber auto-negotiation is disabled.
Pause (IEEE 802.3xy)	Pause signaling is an IEEE feature that temporarily suspends data transmission between two devices in the event that one of the devices becomes overwhelmed. The media converter supports pause negotiation on the 10/100/1000Base-T connection and 1000Base-X fiber connection.
Duplex	Full and half duplex operation supported.
Jumbo Packets	Transparent to jumbo packets up to 10KB.
Remote Loopback	Capable of performing a loopback on the 1000Base-X fiber interface.

SMI-1110 Advanced Management Features

Enterprise and carrier-grade security is available through the support of strong authentication systems such as TACACS+, RADIUS and LDAP. Secure in-band access is assured via SNMPv3, SSH CLI and secure HTTPS Internet browser.

SNMP

- Full read/write capabilities via central SNMP servers and PerleVIEW
- Send SNMP traps (up to 4 servers)
- SNMPv3, V2C and V1
- SNMPv3 – encryption and authentication for both management and trap support
- RFC1213 MIB II
- Proprietary MIB provided

Telnet / SSH CLI access

In-band command line access via Telnet or SSH application

Internet Browser access

- Fast and intuitive graphical web interface for use with common internet browsers such Internet Explorer, Mozilla Firefox and Safari
 - HTTP or secure HTTPS
 - PerleVIEW Centralized Management Package
-

Console port CLI access

Out-of-band command line access via Cisco compatible RJ45 serial console port using common “rolled” CAT5 cable.
Console port can be enabled (default) or disabled

Concurrent management sessions

Run multiple management sessions simultaneously for multiple users

Inactivity timeout

Protect secure management sessions by setting an inactivity timeout value

Alert event reporting

Alert level events are stored in the local event log and sent as:

- SNMP traps to up to 4 servers
- SYSLOG messages to a SYSLOG server
- Email to user defined email address

Advanced IP feature set

- IPV4 and IPV6 address support
 - DHCP
 - DNS
 - Dynamic DNS
 - NTP
 - TFTP
 - Telnet
 - SSH V2 and V1
 - HTTP
 - HTTPS
-
-

Advanced Management User Authentication with primary and secondary server support	<ul style="list-style-type: none"> • TACACS+ • RADIUS • LDAP • Active Directory via LDAP • RSA Secure ID-agent or via RADIUS authentication • Kerberos • NIS
Advanced Management User Authorization and Accounting	<ul style="list-style-type: none"> • TACACS+ • RADIUS
Encryption	<ul style="list-style-type: none"> • AES (256/192/128), 3DES, DES, Blowfish, CAST128, ARCFOUR(RC4), ARCTWO(RC2) • Hashing Algorithms: MD5, SHA-1, RIPEMD160, SHA1-96, and MD5-96 • Key exchange: RSA, EDH-RSA, EDH-DSS, ADH • X.509 Certificate verification: RSA, DSA
Access Control List	An access control list can be created which can filter out only those workstations that are authorized to access the management resources. Filter on IP and/or Ethernet MAC addresses
Network Services Filter	Enable only those network services on the management module that are allowed on your network (Telnet, SSH, HTTP, HTTPS, SNMP)
Firmware download	Update the latest level firmware for management and media converter modules via TFTP or PerleVIEW

Media Converter Module Indicators

Power / TST	This green LED is turned on when power is applied to the media converter. Otherwise it is off. The LED will blink when in Loopback test mode.
Fiber link on / Receive activity (LKF)	This green LED is operational only when power is applied. The LED is on when the 1000Base-X link is on and flashes with a 50% duty cycle when data is received.
Copper link on / Receive activity (LKC)	This green LED is operational only when power is applied. The LED is on when the 10/100/1000Base-T link is on and flashes with a 50% duty cycle when data is received.
Fiber Duplex (FDF)	This green LED is operational only when power is applied. The LED is on when the 10/100/1000Base-X link is operational in full duplex mode. The LED is off when in half duplex.

Copper Duplex (FDC)	This green LED is operational only when power is applied. The LED is on when the 10/100/1000Base-T link is operational in full duplex mode. The LED is off when in half duplex.
10/100/1000 Speed	This multi-color LED is operational only when power is applied. The LED is green when the speed of the copper ethernet port is running at 1000 Mbps. The LED is orange when the speed of the copper Ethernet port is running at 100 Mbps. The LED is off when in 10 Mbps.
Management Module Indicators / reset	
Power	Blinking green during startup cycle Steady green: module has power and is ready Red : error
ALM	Red alarm indicator activated when an alert event occurs
LKC	Green indicator indicating an active Ethernet link. Blinking indicates RX and TX of data
100/1000	Green - 1000 Mbps link Yellow - 100 Mbps link Off - 10 Mbps or no Link
Reset button	Recessed pinhole button resets module
Connectors	
10/100/1000Base-T	RJ45 connector 2 pair CAT5, EIA/TIA 568A/B or better cable for 10/100. 4 pair CAT5 UTP cable for Gigabit. Magnetic Isolation 1.5kv
Management ethernet port	10/100/1000Base-T - RJ45 Auto- MDI/MDIX
Management console port	RS232 Serial RJ45 - Cisco pinout for use with standard CAT5 "rolled cable" (crossover) 9600 to 115k bps 7/8 bits Odd,even, no parity 1/2 stop bits Hardware/software flow control DCD/DSR monitoring
Filtering	
Filtering	1024 MAC Addresses
Frame Specifications	
Buffer	1000 Kbits frame buffer memory

Size	Maximum frame size of 10,240 bytes -- Gigabit Maximum frame size of 2048 bytes -- Fast Ethernet
-------------	--

Switches - accessible through a side opening in the chassis

Auto-Negotiation (802.3u)	<p><i>Enabled (Default)</i> - The media converter uses 802.3u Auto-negotiation on the 10/100/1000Base-T interface. It is set to advertise full duplex, half duplex, pause and remote fault capabilities.</p> <p><i>Disabled</i> - The media converter sets the port according to the position of the speed and duplex switches.</p>
----------------------------------	---

Link Mode	<p>Link Mode provides a transparency to the state of the copper link allowing for simplified trouble shooting from the devices connected to the media converter.</p> <p><i>Normal (Default – Up)</i> With Fiber Auto Negotiation enabled when the copper link goes down the 1000Base-X link is brought down. The 1000Base-X link will advertise Remote Fault (Link Fault).</p> <p>With Fiber Auto Negotiation disabled the state of the copper link has no effect on the 1000Base-X link.</p> <p><i>Smart Link Pass Through (Down)</i> With Fiber Auto Negotiation enabled the behavior is as follows. When the copper link goes down the 1000Base-X link is brought down. The 1000Base-X link will advertise Remote Fault (Link Fault). When Remote Fault (Link Fault) is received on the 1000Base-X interface the copper transmitter will be turned off. When the copper receiver is off the 1000Base-X transmitter will be turned off. When the 1000Base-X receiver goes off the copper transmitter will be turned off.</p> <p>With Fiber Auto-Negotiation disabled the behavior is as follows. When the copper receiver is off the 1000Base-X transmitter will be turned off. When the 1000Base-X receiver goes off the copper transmitter will be turned off.</p>
------------------	--

Fiber Fault Alert	<p>The Fiber Fault Alert switch has meaning when Auto-Negotiation is disabled</p> <p><i>Enabled (Default - Up)</i> When the 1000Base-X receiver is off the 1000Base-X transmitter is turned off. Periodically the 1000Base-X receiver will be turned on for a short period to allow the condition to clear if the 1000Base-X link partner is using a similar feature.</p> <p><i>Disabled (Down)</i></p>
--------------------------	---

Remote Loopback	<p>The media converter can perform a loopback on the 1000Base-X fiber interface. <i>Disabled (Default - Up)</i></p> <p><i>Enabled</i> - The 1000Base-X receiver is looped to the 1000Base-X transmitter. The copper transmitter is taken off the interface.</p>
Auto-MDIX (Strap)	<p>If Auto-Negotiation (802.3u) is enabled, the media converter determines the current cable pinout to use on the copper interface. If Auto-Negotiation (802.3u) is disabled the Media converter will use the RX Energy method on the copper interface to set the port MDI or MDIX whichever is appropriate.</p> <p><i>Enabled (Default)</i> - Either a straight-through or crossover type cable can be used to connect the media converter to the device on the other end of the cable.</p> <p><i>Disabled</i> - If the partner device on the other end of the cable does not have the Auto-MDIX feature a specific cable, either a straight-through or crossover will be required to ensure that the media converter's transmitter and the partner devices transmitter are connected to the others receiver. The Media converter's 100Base-TX port is configured as MDI-X with this switch setting.</p>
Speed Copper	100 (Default) 10
Duplex Copper	Full (Default) Half
Duplex Fiber	Full (Default) Half
Power	
Input Supply Voltage	(12 vDC Nominal)
Current	0.34amps at 12vdc
Power Consumption	4.1watts
Power Connector	5.5mm x 9.5mm x 2.1mm barrel socket
Power Adapter	
Universal AC/DC adapter	100-240v AC, regulated DC adapter included
Environmental Specifications	

Operating Temperature	0 C to 50 C (32 F to 122 F)
Storage Temperature	minimum range of -25 C to 70 C (-13 F to 158 F)
Operating Humidity	5% to 90% non-condensing
Storage Humidity	5% to 95% non-condensing
Operating Altitude	Up to 3,048 meters (10,000 feet)
Heat Output (BTU/HR)	14
MTBF (Hours)	238,087 without power adaptor 164,883 with power adaptor Calculation model based on MIL-HDBK-217-FN2 @ 30 °C
Chassis	Metal with an IP20 ingress protection rating
Mounting	
Din Rail Kit	Optional
Rack Mount Kit	Optional
Product Weight and Dimensions	
Weight	0.722 kg
Dimensions	175 x 145 x 23 mm
Packaging	
Shipping Weight	1.2 kg
Shipping Dimensions	300 x 200 x 70 mm
Regulatory Approvals	
Emissions	FCC Part 15 Class A, EN55022 Class A

CISPR 22 Class A
 CISPR 32:2015/EN 55032:2015 (Class A)
 CISPR 24:2010/EN 55024:2010

EN61000-3-2

Immunity EN55024

UL/EN/IEC 62368-1
 CAN/CSA C22.2 No. 62368-1

UL 60950-1
 IEC 60950-1(ed 2); am1, am2
 EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

Electrical Safety CE

EN 60825-1:2007

Laser Safety

Fiber optic transmitters on this device meet Class 1 Laser safety requirements per IEC-60825 FDA/CDRH standards and comply with 21CFR1040.10 and 21CFR1040.11.

Environmental Reach, RoHS and WEEE Compliant

ECCN: 5A992

HTSUS Number: 8517.62.0020

CCATS: G134373

Other Perle Limited Lifetime Warranty

Select a Model to obtain a Part Number - Managed Stand-alone Media Converters - 10/100/1000 to Fiber

Model	Connector	Type	Transmit (dBm)		Receive (dBm)		Power Budget (dBm)	Wavelength (nm)	Fiber Type	Core Size (um)	Modal Bandwidth (MHz* Km)	Operating Distance
			Min	Max	Min	Max						
SMI-1110-M2SC05	Dual SC	1000Base-SX	-9.5	-4.0	-17.0	-3.0	7.5	850	MMF	62.5	160	220 m (722 ft)
			62.5	200	275 m (902 ft)							
			50	400	500 m (1,640 ft)							
			50	500	550 m (1,804 ft)							

											50	2000	1000 m (3281 ft)
SMI-1110-M2LC05	Dual LC	1000Base-SX	-9.5	-4.0	-17.0	-3.0	7.5	850	MMF	62.5	160	220 m (722 ft)	
											62.5	200	275 m (902 ft)
											50	400	500 m (1,640 ft)
											50	500	550 m (1,804 ft)
											50	2000	1000 m (3281 ft)
SMI-1110-M2ST05	Dual ST	1000Base-SX	-9.5	-3.0	-20.0	-3.0	10.5	1310	MMF	62.5	160	220 m (722 ft)	
											62.5	200	275 m (902 ft)
											50	400	500 m (1,640 ft)
											50	500	550 m (1,804 ft)
											50	2000	1000 m (3281 ft)
SMI-1110-M2SC2	Dual SC	1000Base-LX	-6.0	0.0	-17.0	-0.0	11	1310	MMF	62.5	160	2 km (1.2 mi)	
											50	500	1000m (3280ft)
SMI-1110-M2ST2	Dual ST	1000Base-LX	-6.0	0.0	-17.0	-0.0	11	1310	MMF	62.5	160	2 km (1.2 mi)	
											50	500	1000m (3280ft)
SMI-1110-M2LC2	Dual LC	1000Base-LX	-9.0	-1.0	-19.0	-1.0	10	1310	MMF	62.5	160	2 km (1.2 mi)	
											50	500	1000m (3280ft)
SMI-1110-S2SC10	Dual SC	1000Base-LX/LH	-9.5	-3.0	-20.0	-3.0	10.5	1310	MMF*	62.5	500	550 m (1,804 ft)	
											50	400	550 m (1,804 ft)
											50	400	550 m (1,804 ft)
									SMF	**	-	10 km (6.2 mi)	
SMI-1110-S2LC10	Dual LC	1000Base-LX/LH	-9.5	-3.0	-20.0	-3.0	10.5	1310	MMF*	62.5	500	550 m (1,804 ft)	
											50	400	550 m (1,804 ft)
											50	400	550 m (1,804 ft)
									SMF	**	-	10 km (6.2 mi)	

SMI-11110-S2ST10	Dual ST	1000Base-LX/LH	-9.5	-3.0	-20.0	-3.0	10.5	1310	MMF*	62.5	500	550 m (1,804 ft)
										50	400	550 m (1,804 ft)
										50	400	550 m (1,804 ft)
									SMF	**	-	10 km (6.2 mi)
SMI-11110-S2SC40	Dual SC	1000Base-EX	-2.0	2.0	-23.0	-3.0	21.0	1310	SMF	**	-	40 km (25 mi)
SMI-11110-S2LC40	Dual LC	1000Base-EX	-3.0	2.0	-23.0	-3.0	20.0	1310	SMF	**	-	40 km (25 mi)
SMI-11110-S2ST40	Dual ST	1000Base-EX	-2.0	2.0	-23.0	-3.0	21.0	1310	SMF	**	-	40 km (25 mi)
SMI-11110-S2SC70	Dual SC	1000Base-ZX	-2.0	5.0	-23.0	-3.0	21.0	1550	SMF	-	-	70 km (43 mi)
SMI-11110-S2LC70	Dual LC	1000Base-ZX	0.0	5.0	-23.0	-3.0	23.0	1550	SMF	-	-	70 km (43 mi)
SMI-11110-S2ST70	Dual ST	1000Base-ZX	-2.0	5.0	-23.0	-3.0	21.0	1550	SMF	-	-	70 km (43 mi)
SMI-11110-S2SC120	Dual SC	1000Base-ZX	0.0	5.0	-32.0	-9	32.0	1550	SMF	-	-	120 km (75 mi)
SMI-11110-S2LC120	Dual LC	1000Base-ZX	0.0	5.0	-32.0	-9	32.0	1550	SMF	-	-	120 km (75 mi)
SMI-11110-S2ST120	Dual ST	1000Base-ZX	0.0	5.0	-32.0	-9	32.0	1550	SMF	-	-	120 km (75 mi)
SMI-11110-S2SC160	Dual SC	1000Base-ZX	2.0	5.0	-34.0	-9	36.0	1550	SMF	-	-	160 km (100 mi)
SMI-11110-S2LC160	Dual LC	1000Base-ZX	2.0	5.0	-34.0	-9	36.0	1550	SMF	-	-	160 km (100 mi)
SMI-11110-S2ST160	Dual ST	1000Base-ZX	2.0	5.0	-34.0	-9	36.0	1550	SMF	-	-	160 km (100 mi)

Single Fiber Models Recommended use in pairs

Model	Connector	Type	Transmit (dBm)		Receive (dBm)		Power Budget (dBm)	Wavelength (nm)	Fiber Type	Core Size (um)	Modal Bandwidth (MHz* Km)	Operating Distance
			Min	Max	Min	Max						
SMI-11110-M1SC05U	Single SC	1000Base-BX-U	-10.0	-4.0	-17.0	-3.0	7.0	1310 / 1550	MMF	62.5	500	500 m (1,640 ft)
										50	500	500 m (1,640 ft)
SMI-11110-M1SC05D	Single SC	1000Base-BX-D	-10.0	-4.0	-17.0	-3.0	7.0	1550 / 1310	MMF	62.5	500	500 m (1,640 ft)
										50	500	500 m (1,640 ft)
SMI-11110-S1SC10U	Single SC	1000Base-BX-U	-9.0	-3.0	-20.0	-3.0	11.0	1310 / 1490	SMF	**	-	10 km (6.2 mi)
SMI-11110-S1SC10D	Single SC	1000Base-BX-D	-9.0	-3.0	-20.0	-3.0	11.0	1490 / 1310	SMF	**	-	10 km (6.2 mi)

SMI-1110-S1SC20U	Single SC	1000Base-BX-U	-8.0	-3.0	-22.0	-3.0	14.0	1310	SMF	**	-	20 km (12.4 mi)
SMI-1110-S1SC20D	Single SC	1000Base-BX-D	-8.0	-3.0	-22.0	-3.0	14.0	1490	SMF	**	-	20 km (12.4 mi)
SMI-1110-S1SC40U	Single SC	1000Base-BX-U	-3.0	2.0	-23.0	-3.0	20.0	1310	SMF	**	-	40 km (25 mi)
SMI-1110-S1SC40D	Single SC	1000Base-BX-D	-3.0	2.0	-23.0	-3.0	20.0	1490	SMF	**	-	40 km (25 mi)
SMI-1110-S1SC80U	Single SC	1000Base-BX-U	-2.0	3.0	-26.0	-3.0	24.0	1510	SMF	-	-	80 km (50 mi)
SMI-1110-S1SC80D	Single SC	1000Base-BX-D	-2.0	3.0	-26.0	-3.0	24.0	1590	SMF	-	-	80 km (50 mi)
SMI-1110-S1SC120U	Single SC	1000Base-BX-U	-3.0	2.0	-34.0	-9	31.0	1510	SMF	-	-	120 km (75 mi)
SMI-1110-S1SC120D	Single SC	1000Base-BX-D	-3.0	2.0	-34.0	-9	31.0	1590	SMF	-	-	120 km (75 mi)

The minimum fiber cable distance for all converters listed is 2 meters.

*A mode-conditioning adapter as specified by the IEEE standard, is required regardless of the span length. Note how the mode conditioning adapter for 62.5-um fibers has a different specification from the mode-conditioning adapter for 50-um fibers.

**ITU-T G.652 SMF as specified by the IEEE 802.3z standard.


Media Converter Accessories

4 DIN Rail Mount Bkt DIN Rail Mounting Kit

MCSM Standalone media converter wall mount bracket

Managed Ethernet to Fiber Links


Manage your copper to fiber link with a Managed Standalone Media Converter. Ideal for use in managed networks with low density fiber applications. A Managed Standalone Media Converter is connected across a fiber link to a remote media converter. The copper and fiber link on the managed standalone unit can provide vital information and status to network management tools such as SNMP.

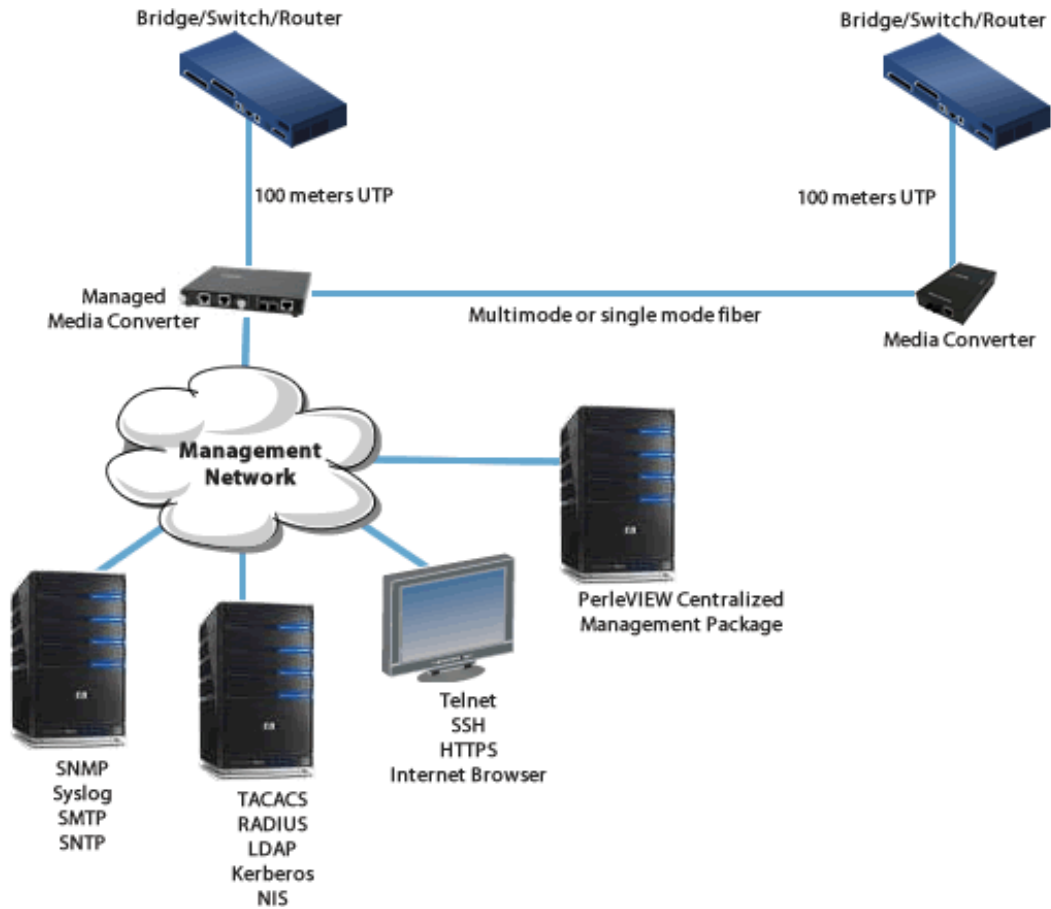

Bridge 10/100 Devices to gigabit Backbone

Connect 10/100 devices to Gigabit Backbone


Devices on a 10/100 ethernet switch can be connected to a Gigabit backbone through the use of rate converting 10/100/1000 Media Converters.

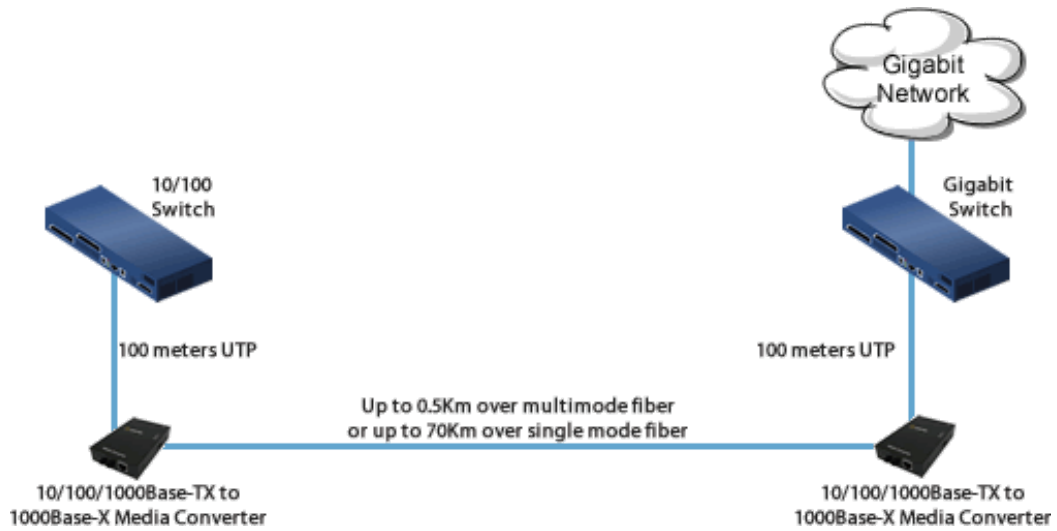

Single Mode / Single Fiber

Connect copper ports over a single fiber strand (also referred to as “Bi-Directional” BiDi)

When Single Strand fiber is used, a pair of Single Fiber Media Converters is needed for the copper to fiber conversion. Perle Single Fiber Media Converters are also referred to as “Up/Down” models. For example the SMI-1110-S1SC10U (“Up”) and SMI-1110-S1SC10D (“Down”), shown below, must be used in pairs. An “Up” must be matched with a “Down” peer to deal with transmit and receive frequencies separately.

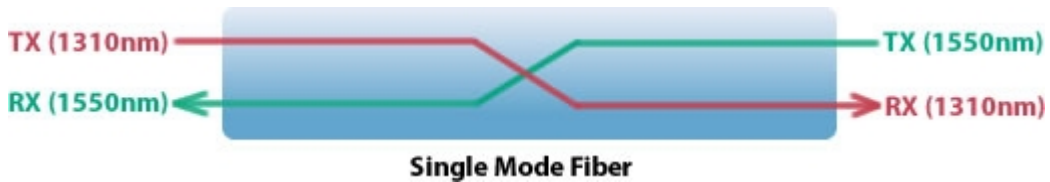

SMI-1110-S1SC10USMI-1110-S1SC10D


The majority of installations for single mode fiber media converters are of the “dual connector” or “dual fiber” type where one fiber connection is used for transmit, the other for receive. These are physically “crossed” to match up the Transmit/Receive links.





However, to reduce costs, or where there are limits on available fiber, WDM technology may be utilized. WDM uses separate transmit and receive frequencies to communicate on a single fiber strand. WDM technology relies on the fact that optical fibers can carry many wavelengths of light simultaneously without interaction between each wavelength. Thus, a single fiber can carry many separate wavelength signals or channels simultaneously.

So remember, if Single Strand fiber is used, you will need an “Up” Media Converter on one side and a “Down” Media Converter on the other for copper to fiber conversion.

Perle offers a wide variety of Single Fiber (“Up/Down”) Media Converters to connect 10BaseT, Fast Ethernet and Gigabit to single fiber. Whether you need Managed or Unmanaged, Standalone or Modular Chassis Based, 20km or 120km, Perle has the right model to meet your fiber conversion requirement.

Product Image	Description	Power Cord	Product Number
	SMI-1110-M2SC05 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-SX 850nm multimode (SC) [550 m/1804 ft]	USA UK EU SA AUS NONE	05070604 05070601 05070602 05070605 05070606 05070608



Product Image	Description	Power Cord	Product Number
	SMI-1110-M2ST05 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-SX 850nm multimode (ST) [550 m/1804 ft]	USA UK EU SA AUS NONE	05070614 05070611 05070612 05070615 05070616 05070618
	SMI-1110-M2LC05 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-SX 850nm multimode (LC) [550 m/1804 ft]	USA UK EU SA AUS NONE	05070624 05070621 05070622 05070625 05070626 05070628
	SMI-1110-S2SC10 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX/LH 1310 nm single mode (SC) [10 km/6.2 miles] or multimode (SC) [550 m/1804 ft] using	USA UK EU SA AUS NONE	05070634 05070631 05070632 05070635 05070636 05070638
	SMI-1110-S2ST10 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX/LH 1310 nm single mode (ST) [10 km/6.2 miles] or multimode (ST) [550 m/1804 ft] using	USA UK EU SA AUS NONE	05070644 05070641 05070642 05070645 05070646 05070648
	SMI-1110-S2LC10 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX/LH 1310 nm single mode (LC) [10 km/6.2 miles] or multimode (LC) [550 m/1804 ft] using	USA UK EU SA AUS NONE	05070654 05070651 05070652 05070655 05070656 05070658
	SMI-1110-S2SC40 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-EX 1310 nm single mode (SC) [40 km/24.9 miles]	USA UK EU SA AUS NONE	05070664 05070661 05070662 05070665 05070666 05070668

Product Image	Description	Power Cord	Product Number
	SMI-1110-S2ST40 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-EX 1310 nm single mode (ST) [40 km/24.9 miles]	USA UK EU SA AUS NONE	05070674 05070671 05070672 05070675 05070676 05070678
	SMI-1110-S2LC40 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-EX 1310 nm single mode (LC) [40 km/24.9 miles]	USA UK EU SA AUS NONE	05070684 05070681 05070682 05070685 05070686 05070688
	SMI-1110-S2SC70 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (SC) [70 km/43.5 miles]	USA UK EU SA AUS NONE	05070694 05070691 05070692 05070695 05070696 05070698
	SMI-1110-S2ST70 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (ST) [70 km/43.5 miles]	USA UK EU SA AUS NONE	05070704 05070701 05070702 05070705 05070706 05070708
	SMI-1110-S2LC70 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (LC) [70 km/43.5 miles]	USA UK EU SA AUS NONE	05070714 05070711 05070712 05070715 05070716 05070718
	SMI-1110-S2SC120 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (SC) [120 km/74.6 miles]	USA UK EU SA AUS NONE	05070724 05070721 05070722 05070725 05070726 05070728


Product Image	Description	Power Cord	Product Number
	SMI-1110-S2ST120 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (ST) [120 km/74.6 miles]	USA UK EU SA AUS NONE	05070734 05070731 05070732 05070735 05070736 05070738
	SMI-1110-S2LC120 - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (LC) [120 km/74.6 miles]	USA UK EU SA AUS NONE	05070744 05070741 05070742 05070745 05070746 05070748
	SMI-1110-S1SC10U - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1310nm TX / 1490nm RX single fiber single mode (SC) [10 km/6.2 miles]	USA UK EU SA AUS NONE	05070754 05070751 05070752 05070755 05070756 05070758
	SMI-1110-S1SC10D - 10/100/1000 Gigabit Ethernet Standalone IP Managed Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1490nm TX / 1310nm RX single fiber single mode (SC) [10 km/6.2 miles]	USA UK EU SA AUS NONE	05070764 05070761 05070762 05070765 05070766 05070768
	SMI-1110-S2SC160 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (SC) [160 km/100 miles]	USA UK EU SA AUS NONE	05070784 05070781 05070782 05070785 05070786 05070788
	SMI-1110-S2LC160 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (LC) [160 km/100 miles]	USA UK EU SA AUS NONE	05070794 05070791 05070792 05070795 05070796 05070798

Product Image	Description	Power Cord	Product Number
	SMI-1110-S2ST160 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-ZX 1550 nm single mode (ST) [160 km/100 miles]	USA UK EU SA AUS NONE	05070804 05070801 05070802 05070805 05070806 05070808
	SMI-1110-S1SC20U - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1310nm TX / 1490nm RX single fiber single mode (SC) [20 km/12.4 miles]	USA UK EU SA AUS NONE	05070814 05070811 05070812 05070815 05070816 05070818
	SMI-1110-S1SC20D - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1490nm TX / 1310nm RX single fiber single mode (SC) [20 km/12.4 miles]	USA UK EU SA AUS NONE	05070824 05070821 05070822 05070825 05070826 05070828
	SMI-1110-S1SC40U - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1310nm TX / 1490nm RX single fiber single mode (SC) [40 km/25 miles]	USA UK EU SA AUS NONE	05070834 05070831 05070832 05070835 05070836 05070838
	SMI-1110-S1SC40D - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1490nm TX / 1310nm RX single fiber single mode (SC) [40 km/25 miles]	USA UK EU SA AUS NONE	05070844 05070841 05070842 05070845 05070846 05070848
	SMI-1110-S1SC80U - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1510nm TX / 1590nm RX single fiber single mode (SC) [80 km/50 miles]	USA UK EU SA AUS NONE	05070854 05070851 05070852 05070855 05070856 05070858

Product Image	Description	Power Cord	Product Number
	SMI-1110-S1SC80D - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1590nm TX / 1510nm RX single fiber single mode (SC) [80 km/50 miles]	USA UK EU SA AUS NONE	05070864 05070861 05070862 05070865 05070866 05070868
	SMI-1110-S1SC120U - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1510nm TX / 1590nm RX single fiber single mode (SC) [120 km/75 miles]	USA UK EU SA AUS NONE	05070874 05070871 05070872 05070875 05070876 05070878
	SMI-1110-S1SC120D - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1590nm TX / 1510nm RX single fiber single mode (SC) [120 km/75 miles]	USA UK EU SA AUS NONE	05070884 05070881 05070882 05070885 05070886 05070888
	SMI-1110-M2SC2 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX 1310nm Extended multimode (SC) [2km /6562 ft.]	USA UK EU SA AUS NONE	05070524 05070521 05070522 05070525 05070526 05070528
	SMI-1110-M2ST2 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX 1310nm Extended multimode (ST) [2km /6562 ft.]	USA UK EU SA AUS NONE	05070534 05070531 05070532 05070535 05070536 05070538
	SMI-1110-M2LC2 - 10/100/1000 Gigabit Ethernet IP Managed Standalone Media and Rate Converter. 10/100/1000Base-T (RJ-45) [100 m/328 ft.] to 1000Base-LX 1310nm Extended multimode (LC) [2km /6562 ft.]	USA UK EU SA AUS NONE	05070544 05070541 05070542 05070545 05070546 05070548

Product Image	Description	Power Cord	Product Number
	SMI-1110-M1SC05D - 10/100/1000 Gigabit Ethernet IP Managed Media and Rate Converter. 10/100/1000BASE-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1550nm TX / 1310nm RX single fiber multimode (SC) [550 m/1804 ft]	USA UK EU SA AUS NONE	05071264 05071261 05071262 05071265 05071266 05071268
	SMI-1110-M1SC05U - 10/100/1000 Gigabit Ethernet IP Managed Media and Rate Converter. 10/100/1000BASE-T (RJ-45) [100 m/328 ft.] to 1000Base-BX 1310nm TX / 1550nm RX single fiber multimode (SC) [550 m/1804 ft]	USA UK EU SA AUS NONE	05071254 05071251 05071252 05071255 05071256 05071258

Accessories

Accessory Image	Description	Model Number	Accessory Number
	DIN Rail Mounting Kit for 4 & 8 port IOLAN SDS/STS wall mount models, all Stand-Alone Media Converters and all Stand-Alone Ethernet Extenders. Two of these brackets are required for the 8 port STS8-D model.	4 DIN Rail Mount Bkt	04030840
	Standalone media converter wall / rack mount bracket	MCSM	05059999