

# EKI-9516-WV

EN 50155 16-port Full Gigabit Managed Ethernet Switch



CE FCC

## Introduction

EKI-9516 M12 Managed Ethernet Switch is designed for railway applications, including rolling stock. EKI-9516 switch uses M12 connectors to ensure tight, robust connections, and to guarantee reliable operation against environmental disturbances, such as vibration and shock. EKI-9516 provides 16 Gigabit Ethernet M12 ports. In addition, EKI-9516 provides a wide power input range of 24/36/48/72/96/110 V<sub>DC</sub>; the dual, isolated power input increases the reliability of your communications system. The -40 to 70° C operating temperature and IP67-rated waterproof enclosure allow deployment in harsh environments. EKI-9516 is compliant with the essential sections of the European railway standard EN 50155, EN50121-3-2 covering operating temperature, power input voltage, surge, ESD, and vibration, making the switches suitable for a variety of industrial applications.

## Specifications

### Interface

- I/O Port 16 x 10/100/1000Base-T M12 X-Code
- Console Port M12 A-Code
- F/W Backup Port USB (M12 A-Code)
- Power Connector M23 6 pin

### Physical

- Enclosure Aluminum Shell
- Protection Class IP 67
- Installation Wall Mount, DIN Rail (Optional)
- Dimensions (W x D x H) 254 x 174 x 64.5 (mm)
- Weight 3.6 kg

### LED Display

- System LEDs PWR1, PWR2, SYS, CFG, ALM
- Port LED Data

### Environment

- Operating Temperature -40 ~ 70°C (-40 ~ 158°F)
- Storage Temperature -40 ~ 85°C (-40 ~ 185°F)
- Ambient Relative Humidity 5 ~ 95% (non-condensing)

### Power

- Power Consumption ~ 26.4 Watts (System)
- Power Input 24/36/48/72/96/110 V<sub>DC</sub> dual inputs  
Supports Overload Current Protection  
Supports Reverse Polarity Protection

## Features

- Complies with EN50155
- All Gigabit connections support dual ring protection and non-blocking traffic forwarding
- 12 x M12 Gigabit ports and 2 pairs M12 Gigabit ports with bypass relay function
- X-Ring Pro supports rapid and predictable convergence
- Provides M12 connector with IP67 protection
- Operating Temperature: -40 ~ 70° C
- Wide Range Power Input (24/36/48/72/96/110 V<sub>DC</sub>)

### Certification


- EMI FCC Part 15 Subpart B Class A  
CE EN55022 (CISPR)  
EN55024 Class A
- EMS EN61000-4-2 (ESD); EN61000-4-3 (RS); EN61000-4-4 (EFT); EN61000-4-5 (Surge); EN61000-4-6 (CS)  
IEC 61373
- Shock IEC 60068-2-32
- Freefall IEC 61373
- Vibration IEC 61373
- Rail Traffic EN 50155; EN50121-3-2

### L2 Features

- L2 MAC Address 16K
- Jumbo Frame 9KB
- VLAN Group 4093 (VLAN ID 1~4093)
- VLAN Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, GVRP
- Port Mirroring Per port, Multi-source port
- IP Multicast IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control Broadcast, Multicast, Unknown unicast
- Spanning Tree IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro

## Dimensions

Unit: mm

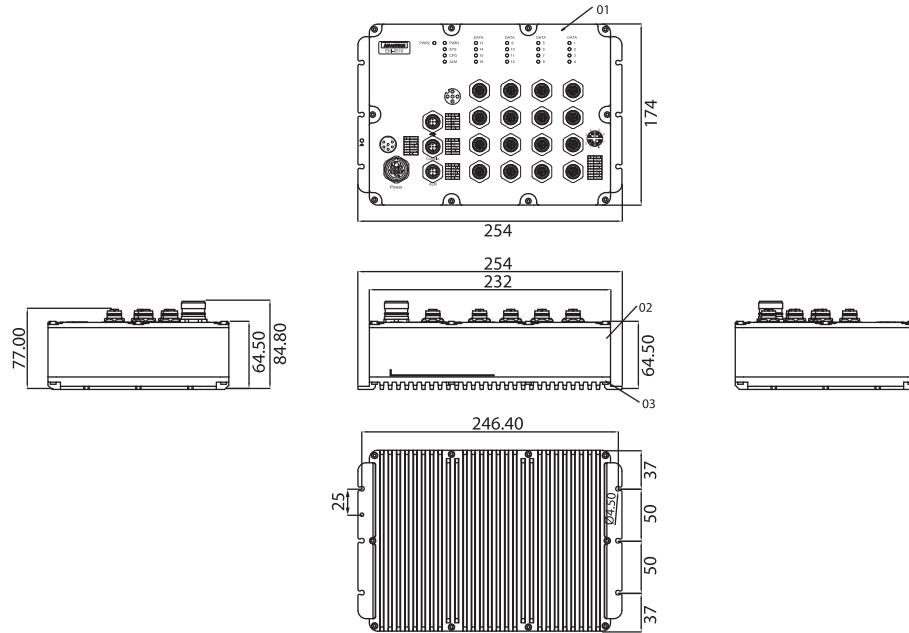

### QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority)
- **Class of Service** IEEE 802.1p based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Egress Rate limit, Ingress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

### Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based), RADIUS, TACACS+
- **ACL** 550 rules
- **Advanced Security** IP Source Guard

### Management

- **DHCP** Client, Server, Relay, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP client

## Ordering Information

- **EKI-9516-C0IDW10E** 16x M12 GbE Managed Ethernet Switch including 24/36/48/72/96/110 V<sub>DC</sub> dual power inputs

## EKI-9516/9512 Series Selection Table

Products		Ports Combination				Power Input Range			Others
Model Name	Ordering P/N	PoE, 10/100/ 1000 Mbps M12 X-Coded	10/100/ 1000 Mbps M12 X-Coded	PoE, 10/100 Mbps M12 D-Coded	10/100 Mbps M12 D-Coded	HV (72V/96V/110 V <sub>DC</sub> )	LV (24V/36V/48 V <sub>DC</sub> )	WV (24/36/48/72V/ 96V/110 V <sub>DC</sub> )	Conformal Coating
EKI-9516P-HV	EKI-9516-P0IDH10E	12	4			✓			✓
EKI-9516P-LV	EKI-9516-P0IDL10E	12	4				✓		✓
EKI-9516-WV	EKI-9516-C0IDW10E		16					✓	✓
EKI-9512P-HV	EKI-9512-P0IDH10E	8	4			✓			✓
EKI-9512P-LV	EKI-9512-P0IDL10E	8	4				✓		✓
EKI-9512-WV	EKI-9512-C0IDW10E		12					✓	✓
EKI-9516DP-HV	EKI-9516-PFIDH10E			12	4	✓			✓
EKI-9516DP-LV	EKI-9516-PFIDL10E			12	4		✓		✓
EKI-9516D-WV	EKI-9516-CFIDW10E				16			✓	✓
EKI-9512DP-HV	EKI-9512-PFIDH10E			8	4	✓			✓
EKI-9512DP-LV	EKI-9512-PFIDL10E			8	4		✓		✓
EKI-9512D-WV	EKI-9512-CFIDW10E				12			✓	✓