



IPS-1042FX-24V Series

IPS-1042FX-24V Series

➔ **Industrial 6-port unmanaged PoE Ethernet switch with 4x10/100Base-T(X) P.S.E. and 2x100Base-FX, 24VDC power input**

Features

- IPS-1042FX-24V series provide 4x10/100Base-T(X) PoE (P.S.E.) and 2x100Base-FX single/multi-mode fiber ports
- Supports IEEE 802.3at compliant 30Watts PoE per port
- Support auto-negotiation and auto-MDI/MDI-X
- Support store and forward transmission
- Support flow control
- Support surge protection technology
- Warning system by relay output
- Slim type rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




Introduction

IPS-1042FX-24V series are unmanaged PoE Ethernet switches with 4 x 10/100Base-T(X) P.S.E. and 2x100Base-FX ports. IPS-1042FX-24V series supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. IPS-1042FX-24V series has 4X10/100Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. IPS-1042FX-24V series support redundant power inputs, configurable relay output alarm and rigid IP-30 housing. In addition, the wide operating temperature range from -40 to 70°C can satisfy most of operating environment.

Practical Operation

IPS-1042FX-24V series can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.

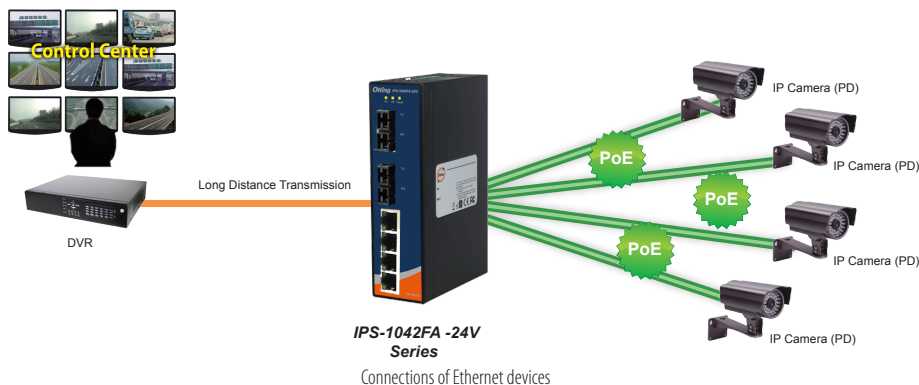

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point


Industrial Cellular VPN Router

Industrial M2M Gateway

Accessories

Network Management Software

Dimensions

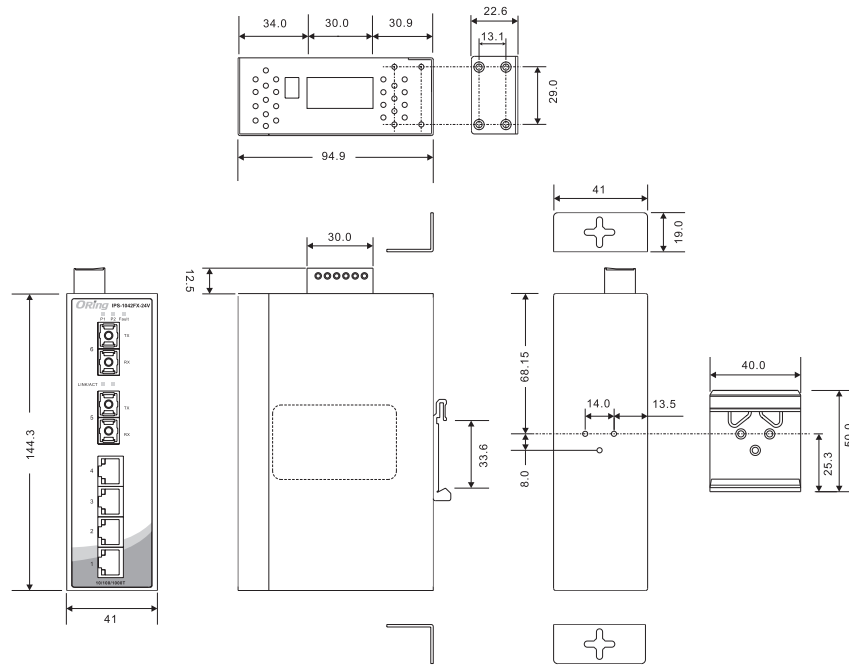

(Unit=mm)

PoE Pin Assignment

10/100Base-T(X) P.S.E. RJ-45 Port	
RJ-45 Pin Definition	
Pin No.	Description
#1	TD+ with PoE Power input +
#2	TD- with PoE Power input +
#3	RD+ with PoE Power input -
#6	RD- with PoE Power input -

Specifications

ORing Switch Model	IIPS-1042FX-MM-SC-24V	IPS-1042FX-SS-SC-24V	
Physical Ports			
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX with P.S.E.	4	4	
Fiber Ports Specifications	Fiber Ports Number	2	2
	Fiber Ports standard	100Base-FX	100Base-FX
	Fiber Mode	Multi-mode	Single-mode
	Fiber Diameter (µm)	62.5/125 µm & 50/125 µm	9/125 µm
	Fiber Optical Connector	SC	SC
	Typical Distance (km)	2 km	30 km
	Wavelength (nm)	1310 nm	1310 nm

ORing Switch Model		IPS-1042FA-MM-SC	IPS-1042FA-SS-SC
Fiber Ports Specifications	Max. Output Optical Power (dBm)	-14 dBm	-8 dBm
	Min. Output Optical Power (dBm)	-23.5 dBm	-15 dBm
	Max. Input Optical Power (Saturation)	0 dBm	0 dBm
	Min. Input Optical Power(Sensitivity)	-31 dBm	-34 dBm
	Link Budget (dB)	7.5 dB	19 dB
Technology			
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-T(X) and 100Base-FX IEEE 802.3x for Flow control IEEE 802.3at PoE specification		
MAC Table	2048 MAC addresses		
Processing	Store-and-Forward		
LED Indicators			
Power Indicator	Green : Power LED x 2		
Fault Indicator	Amber : Indicate PWR1 or PWR2 failure		
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/Act. Green for PoE power injected.		
100Base-FX Fiber Port Indicator	Green for port Link/Act.		
Fault contact			
Relay	Relay output to carry capacity of 1A at 24VDC		
Power			
Redundant Input Power	Dual DC inputs, 24~36VDC on 6-pin terminal block.		
Power Consumption (Typ.)	6.48 Watts (power consumption of P.S.E. is not included)	5.4 Watts (power consumption of P.S.E. is not included)	
Overload Current Protection	Present		
Reverse Polarity Protection	NOT Present		
Physical Characteristics			
Enclosure	IP-30		
Dimensions (W x D x H)	41 (W) x 144.3 (H) x 94.9 (D) mm (1.61 x 5.68 x 3.74 inch)		
Weight (g)	530 g		
Environmental			
Storage Temperature	-40 to 85°C (-40 to 185°F)		
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Operating Humidity	5% to 95% Non-condensing		
Regulatory Approvals			
EMI	FCC Part 15, CISPR (EN55022) class A		
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11		
Shock	IEC60068-2-27		
Free Fall	IEC60068-2-32		
Vibration	IEC60068-2-6		
Safety	EN60950-1		
Warranty	5 years		

Ordering Information

IPS-1 **AA** **B** **CC** -**DD**-**EE** -24V

Code Definition	10/100Base-T(X) P.S.E. Port Number	Additional Port Number	Additional Port Type	Fiber Optical Mode	Fiber Optical Connector
Option	- 04 : 4 ports	- 2 : 2 ports	- FA : 100 Base-FX	- MM : Multi-mode - SS : Single-mode	- SC : SC connector

	Model Name	Description
Available Model	IPS-1042FX-MM-SC-24V	Industrial 6-port unmanaged PoE Ethernet switch with 4x10/100Base-T(X) P.S.E. and 2x100Base-FX, multi-mode, 2Km/1310nm, SC connector, 24VDC power input
	IPS-1042FX-SS-SC-24V	Industrial 6-port unmanaged PoE Ethernet switch with 4x10/100Base-T(X) P.S.E. and 2x100Base-FX, single-mode, 30Km/1310nm, SC connector, 24VDC power input

Packing List

- IPS-1042FX-MM/SS-24V
- DIN-Rail Kit
- Wall-mount Kit
- Quick Installation Guide

Optional Accessories (Can be purchased separately)

- DR-45-24 : 45 Watts@24VDC DIN-Rail power supply
- DR-75-24 : 75 Watts@24VDC DIN-Rail power supply
- DR-120-24 : 120 Watts@24VDC DIN-Rail power supply